


GENERAL NOTES

1. NOTE: TILE SURFACES ON THE POOL DECK SHALL BE UNIFORMLY SLOPED AWAY FROM THE POOL AND ALL WATER WITH A MINIMUM SLOPE OF:
- 3.0mm/305mm FOR SMOOTH FINISHES.
 - 6.4mm/305mm FOR MODERATELY TEXTURED SURFACES
 - 9.5mm/305mm FOR HEAVILY TEXTURED SURFACES
2. GC COORDINATE SLOPES WITH CONTRACT ADMINISTRATOR.
3. GC TO MAINTAIN ALL EXISTING FIRE SEPARATIONS. GC TO ADVISE OF ANY FIRE SEPARATIONS DISCOVERED ON SITE DURING DEMOLITION AND CONSTRUCTION AND ADVISE CONTRACT ADMINISTRATOR.

CERAMIC TILE (CT) SCHEDULE

CT#	COLOUR	SIZE
CT1	CASTLEROCK	25 mm X 25 mm
CT2	BLACK	25 mm X 25 mm
CT3	BISCUIT	25 mm X 25 mm
CT4	TACTILE WARNING	300 mm X 300 mm
CT5	NO DIVING	175 mm X 175 mm
CT6	BISCUIT	50 mm X 50 mm

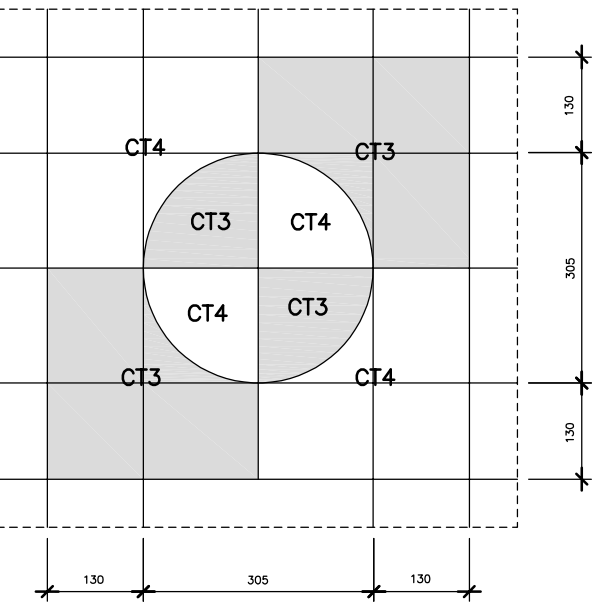

SECCHI DISK DETAIL

SCALE 1:10

KEY NOTES

1. DEPTH MARKERS @ 8000 mm APART MAXIMUM. (REFER TO TYPICAL TILE MARKING ELEVATION DRAWING FOR TILE PATTERN) – CT3 – GC TO CONFIRM DEPTH ON SITE TO NEAREST 0.01 METRE.
2. SHALLOW END MARKERS @ 8000 mm APART MAXIMUM. (REFER TO TYPICAL TILE MARKING ELEVATION DRAWING FOR TILE PATTERN) – CT3
3. DEEP END MARKERS @ 8000 mm APART MAXIMUM. (REFER TO TYPICAL TILE MARKING ELEVATION DRAWING FOR TILE PATTERN) – CT3
4. AREA OF COLOUR & TEXTURE CONTRASTING DETECTABLE WARNING SURFACE AT TOP OF LADDERS, TOP & BOTTOM OF STAIR RUNS.
5. CHANGE OF DEPTH LINE (150mm WIDE MINIMUM COLOUR CONTRASTING STRIPE TYP.)
6. 600 mm WIDE COLOUR TILE SURROUND. (REFER TO DETAILS FOR TILE TYPE DISTRIBUTION)
7. EXISTING DRAINAGE GUTTER TO RECEIVE NEW TILE FINISH. (REFER TO DETAILS FOR TILE TYPE DISTRIBUTION)
8. GALVANIZED STEEL GUARDRAIL AND HANDRAILS. (REFER TO STAIR SECTION DETAILS & TO STRUCTURAL DRAWINGS FOR ADDITIONAL SCOPE OF WORK)
9. APPROXIMATE LOCATION OF EXISTING POOL BULKHEAD. (REFER TO STRUCTURAL FOR ADDITIONAL SCOPE OF WORK)
10. EXISTING DIVING BOARD C/W CIP CONCRETE BASE TO REMAIN. (REFER TO STRUCTURAL FOR ADDITIONAL SCOPE OF WORK)
11. DASHED LINES DENOTES EXISTING DIVING BOARD STAIRS AND PLATFORM ABOVE.
12. TILED SWIMMING LANES (REFER TO DETAILS FOR TILE TYPE DISTRIBUTION)
13. ROPE ANCHOR INSERT FOR LANE MARKER ATTACHMENT.
14. EXISTING LIFE GUARD CHAIR. (REFER TO STRUCTURAL FOR ADDITIONAL SCOPE OF WORK)
15. EXISTING ACCESSIBLE LIFT (REFER TO STRUCTURAL FOR ADDITIONAL SCOPE OF WORK)
16. UNIVERSAL "NO DIVING" SYMBOL GRAPHIC TILE. GRAPHIC MINIMUM 100 mm IN HEIGHT AT 800 mm MINIMUM SPACING AROUND POOL DECK. SYMBOL TO BE ADJACENT TO DEPTH MARKERS (TYPICAL). REFER TO DETAIL 2/4.0 – CT5.
17. CARRY NEW MEMBRANES AND TILE FINISH UP FACE OF EXISTING TOE WALK OF DIVING BOARD CIP CONCRETE BASE. REFER TO POOL TILE IN DETAILS.
18. APPROXIMATE LOCATION OF POOL WATER SKIMMER. (REFER TO STRUCTURAL AND MECHANICAL FOR ADDITIONAL SCOPE OF WORK)
19. APPROXIMATE LOCATION OF POOL DEPTH SIGN LOCATED ON EXISTING WALL. REFER TO DETAIL 3/4.0 FOR TYPICAL SIGN. COORDINATE FINAL LOCATION ON SITE WITH CONTRACT ADMINISTRATOR. SIGN IS TO BE LOCATED 8000mm APART MAXIMUM AROUND PERIMETER OF POOL TO ALIGN WITH SPACING OF POOL DEPTH MARKERS NOTED IN KEYNOTE 1.

A	ISSUED FOR CONSTRUCTION	RvB	07-07	2025
No.	REVISION/DESCRIPTION	BY	DATE	

SEAL




2024.01.20	RvB	KT/RvB	-	-
DATE	DESIGNED	DRAWN	CHECKED	APPROVED

THE CITY OF WINNIPEG
ASSETS & PROJECT MANAGEMENT
DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION
3-65 GARRY STREET, R3C 4K4

PROJECT
SEVEN OAKS RECREATION
CENTRE RENEWAL

SHEET TITLE
POOL FINISH PLAN RENOVATION

SCALE	PROJECT No:	SHEET No:
1:100	2305	A10

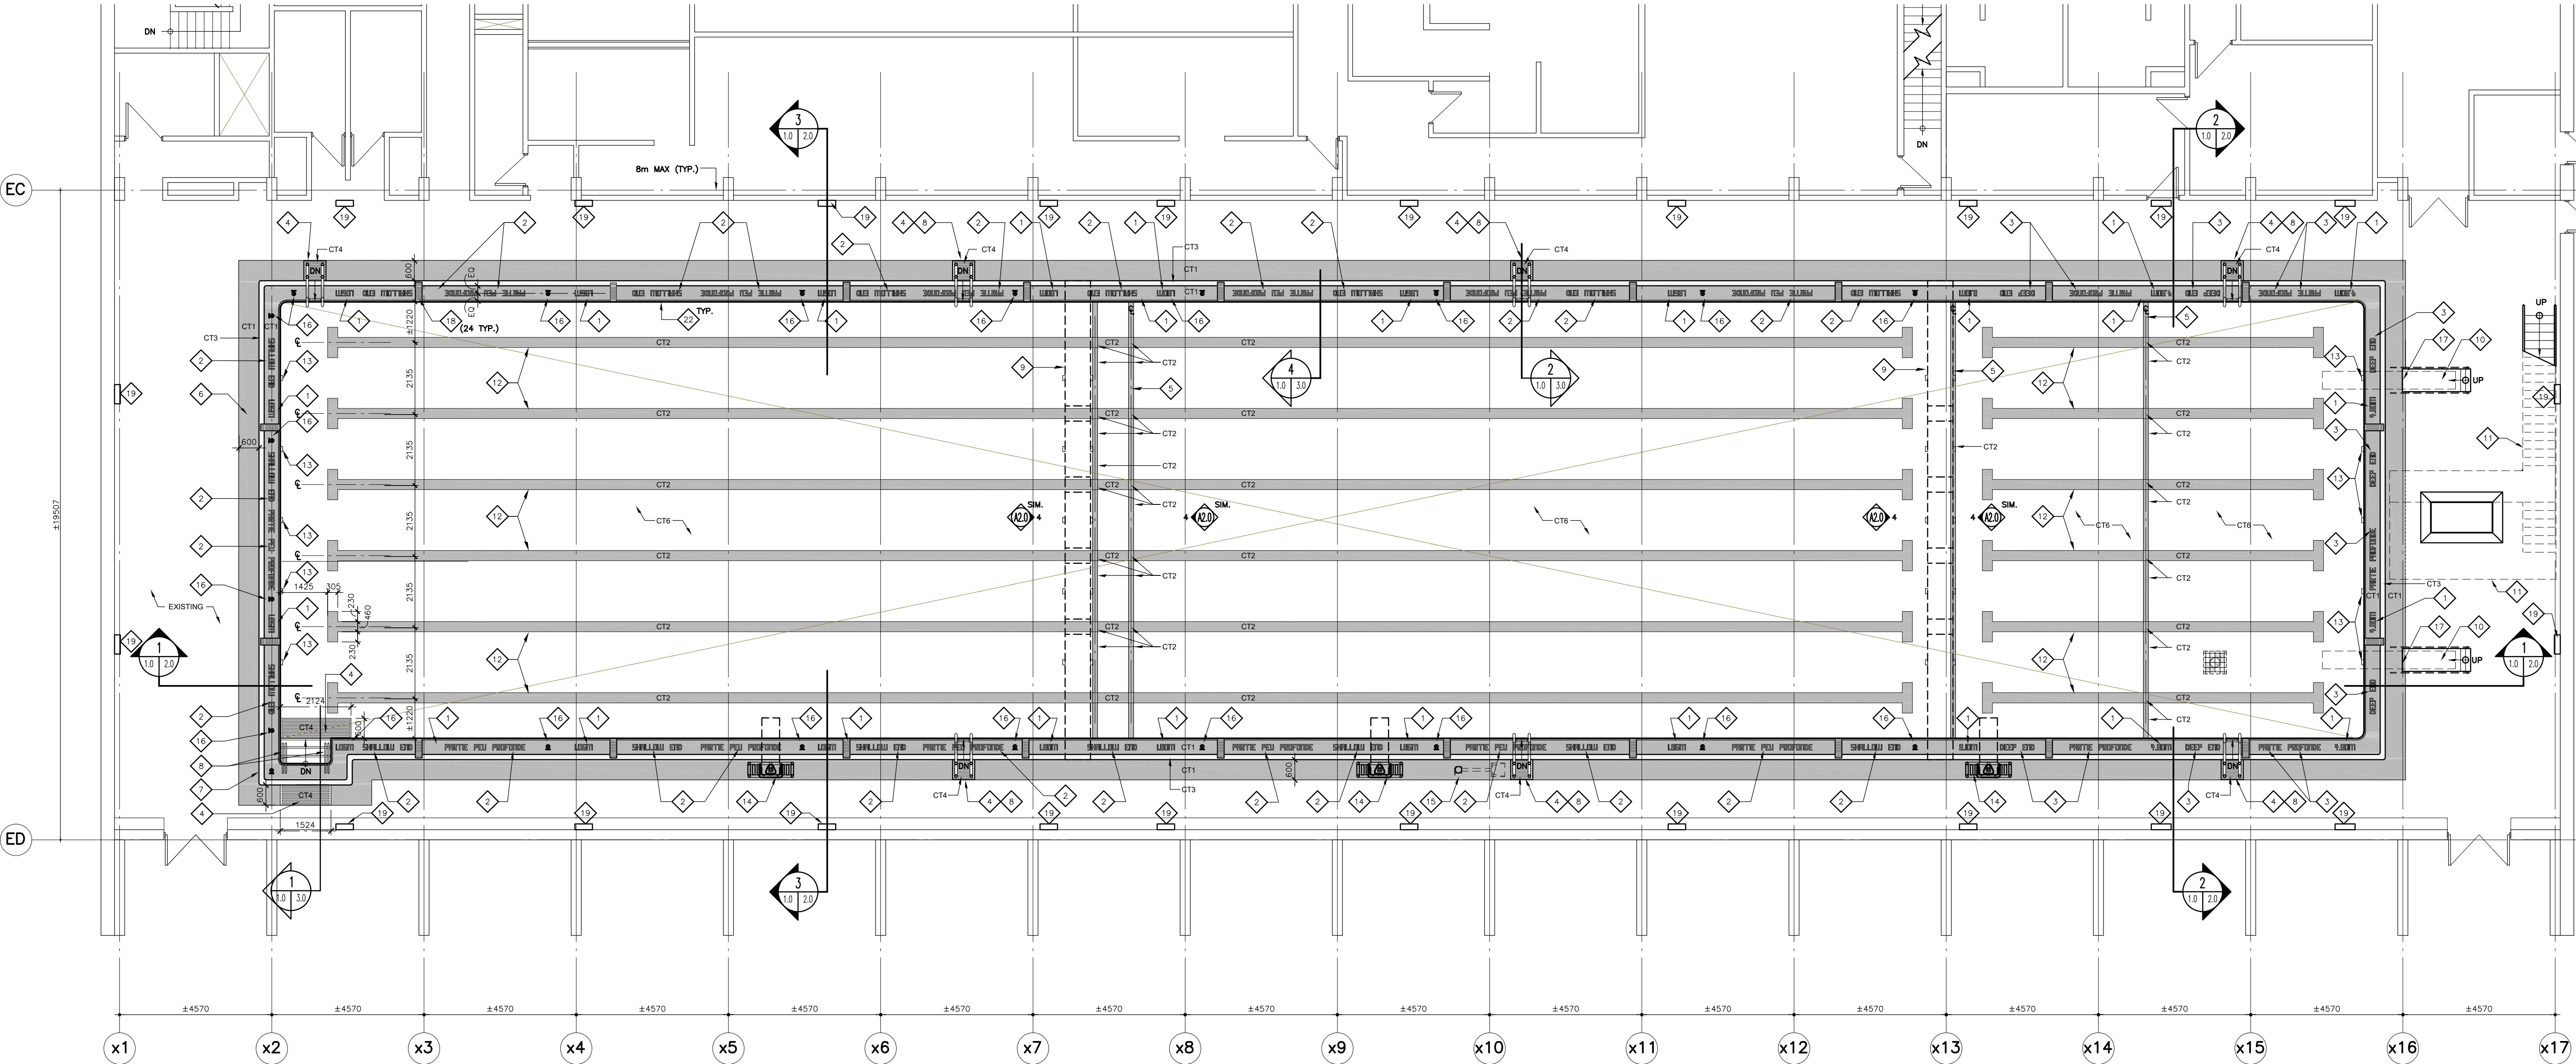

POOL FINISH PLAN

SCALE 1:100

