

GENERAL NOTES:

- COORDINATE WITH MANITOBA HYDRO TO ARRANGE FOR A 4160V SERVICE REPLACEMENT. CONFIRM LOCATION OF UTILITY POLE AND ROUTING OF CONDUITS AND CABLING TO THE SERVICE EQUIPMENT.
- THE EXISTING SERVICE TRANSFORMER AND 600V DISTRIBUTION IS CURRENTLY FED FROM THE HYDRO POLE ON GALT AVENUE. MANITOBA HYDRO MAY RE-UTILIZE OR REPLACE THIS POLE.
- NO TEMPORARY POWER FROM MANITOBA HYDRO IS REQUIRED FOR THE FLOOD PUMPS WHILE DEMOLITION/CONSTRUCTION IS UNDERWAY. A TEMPORARY GENERATOR WILL NEED TO BE PROVIDED FOR LOADS ASSOCIATED WITH HEATING, LIGHTING, ETC DURING DEMOLITION AND NEW CONSTRUCTION. THE STATION CONTAINS DOMESTIC WATER PIPING AND ASSOCIATED HEAT TRACING. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THE DOMESTIC WATER PIPING DOES NOT FREEZE. THE CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGES RESULTING FROM DOMESTIC WATER PIPING FREEZING.
- ALL EXPOSED GROUND WIRE SHALL BE ROUTED IN CONDUIT FOR MECHANICAL PROTECTION.
- THE EQUIPMENT AND DEVICES SHOWN ON THIS DRAWING ARE NEW, AND TO BE PROVIDED BY THE CONTRACTOR UNLESS INDICATED OTHERWISE AS "EXISTING". DEVICES AND EQUIPMENT IS SHOWN AT ITS APPROXIMATE LOCATION, IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CONFIRM THE EXACT LOCATION ON SITE.

CONSTRUCTION NOTES:

- PROVIDE NEW 5KV PAD-MOUNT SWITCHGEAR, SGR-F70. SWITCHGEAR SHALL HAVE SEPARATE COMPARTMENTS FOR FUSIBLE DISCONNECT SWITCH, 5KV UTILITY METERING AND 5KV LOAD CABLING.
- PROVIDE NEW PILES AND CONCRETE PAD, COMPLETE WITH CABLE SLEEVES. REFER TO STRUCTURAL DRAWINGS FOR PAD DETAIL. MAINTAIN A MINIMUM OF 1700mm CLEARANCE FROM PAD PERIMETER TO STATION BUILDING WALL.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO EXCAVATE TRENCH AREA AND PROVIDE CONDUIT SLEEVES FOR MANITOBA HYDRO TO INSTALL DIRECT BURIED UTILITY CABLING C-UTIL. ONCE CABLING HAS BEEN INSTALLED IN THE TRENCH, THE CONTRACTOR TO BACK FILL TRENCH.
- THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING AS-BUILT MARKUPS SHOWING THE LOCATIONS OF ALL NEW CABLES, CONDUIT AND EQUIPMENT.
- PROVIDE 152mm DEEP CRUSHED ROCK WITHIN THE AREA BOUND BY THE PERIMETER GROUND CABLING. CRUSHED ROCK SHALL EXTEND A MINIMUM OF 1000mm BEYOND THE PERIMETER GROUND CABLING. EXCAVATE AREA PRIOR TO INSTALLATION OF CRUSHED ROCK SUCH THAT THE CRUSHED ROCK IS TOP-FLUSH WITH SURROUNDING GRADE. MATERIAL SHALL BE 38MM, CLEAN, CRUSHED, FREE DRAINING GRANULAR MATERIAL (FREE FROM SILT, ORGANICS).
- PROVIDE RIGID PVC CONDUITS FOR ALL GROUNDING CABLES, CONTROL/INSTRUMENT CABLES AND 120 VAC POWER CABLES EMBEDDED AND/OR DIRECT BURIED BELOW SERVICE EQUIPMENT PAD.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE THE EXISTING DIRECT BURIED UTILITY CABLE FROM THE HYDRO POLE TO THE TRANSFORMER. CONTRACTOR TO COORDINATE WITH MB HYDRO FOR THE REMOVAL AND DISPOSAL OF THE EXISTING UTILITY CABLE. ONCE THE CABLE TRENCH IS EXCAVATED AND CABLE IS REMOVED, CONTRACTOR TO BACKFILL THE TRENCH.


MANITOBA HYDRO SCOPE OF WORK:

- SUPPLY NEW UTILITY CABLE (C-UTIL) FROM NEW HYDRO POLE TO 5KV SWITCHGEAR SGR-F70 FUSED DISCONNECT COMPARTMENT.
- SUPPLY NEW METER FOR METERING IN 5KV SWITCHGEAR SGR-F70 METERING COMPARTMENT.

LEGEND:

- CABLES HIDDEN/BURIED
- GROUNDING
- EXISTING WATER MAIN
- EXISTING WASTEWATER/SEWER

ELECTRICAL SITE PLAN
SCALE: 1 : 100

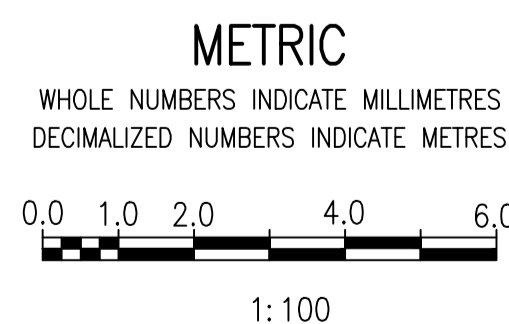

NO.	REVISIONS	DATE	DESIGN	CHECK
00	ISSUED FOR TENDER AND CONSTRUCTION	2024/12/20	PG	DB

AtkinsRéalis
148 Nature Park Way, Winnipeg, Manitoba
Canada R3P 0X7 204-786-8080

DESIGNED BY: P. GILL	CHECKED BY: D. BECKER
DRAWN BY: K. MOHAMMED	APPROVED BY: D. BECKER
SCALE: 1 : 100	ISSUED FOR CONSTRUCTION
DATE: 2024/09/10	BY: B. SOLOWAY
DATE: 2024/12/20	
CONSULTANT NO.: 701408	

ENGINEER'S SEAL

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT

GALT FLOOD PUMPING STATION
2025 TRANSFORMER REMEDIATION UPGRADES
SITE PLAN - ELECTRICAL

CITY DRAWING NUMBER	SHEET	REV.	SIZE
1-0142F-E0002	001	00	A1

1-0142F-E0001-001	GALT FLOOD PUMPING STATION SINGLE LINE DIAGRAM
DRAWING NUMBER	REFERENCE DRAWINGS