

CONSTRUCTION NOTES

1. LIMIT OF REHABILITATION
2. REMOVE EXISTING PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT
3. REMOVE EXISTING CURB AND CONSTRUCT NEW BARRIER CURB (SD-206A, SD-205)
4. RENEW EXISTING 100mm CONCRETE SIDEWALK (SD-228A)
5. CONSTRUCT NEW CURB RAMP (SD-229E)
6. INSTALL NEW DETECTABLE WARNING SURFACE TILE (SD-229E)
7. CONSTRUCT NEW MODIFIED BARRIER CURB (SD-203B)
8. CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT AS PER CROSS SECTION 'A'
9. REMOVE EXISTING PAVEMENT AND INSTALL SUITABLE FILL, TOP SOIL AND SOD
10. CONSTRUCT NEW TYPE MS1 ASPHALT OVERLAY
11. CONSTRUCT NEW BARRIER CURB (SD-206A, SD-205)
12. REMOVE EXISTING CONCRETE APPROACH
13. CONSTRUCT NEW 150mm REINFORCED CONCRETE SIDEWALK
14. INSTALL TYPE B PAVEMENT REPAIR FABRIC
15. CONSTRUCT 1.0 CURB CUT WITH 25mm CURB REVEAL
16. REMOVE EXISTING ASPHALT
17. RENEW EXISTING 150mm REINFORCED CONCRETE SIDEWALK
18. RE-GRADE EXISTING PAVING STONES
19. RE-GRADE EXISTING PRECAST SIDEWALK BLOCKS
20. CONSTRUCT NEW MONOLITHIC CURB AND SIDEWALK (SD-228B)
21. INSTALL NEW CATCH PIT WITH CURB AND GUTTER INLET FRAME AND COVER (SD-023, E24), AND CONNECT TO CATCH BASIN WITH 250mm Ø PVC PIPE AS PER CW-2130

GENERAL NOTES

- A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
- B. ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED (SD-203B)
- C. CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
- D. CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION
- E. ADJUST ALL EXISTING WATER VALVES AND CURB STOPS TO GRADE
- F. PAVEMENT REPAIRS SHOWN ARE A REPRESENTATIVE SAMPLE OF THE TENDER QUANTITIES

ISSUED FOR TENDER
NOT TO BE USED FOR CONSTRUCTION

METRIC
WHOLE NUMBERS INDICATE MILLIMETERS
DECIMALIZED NUMBERS INDICATE METERS

TENDER NO. 11-2025

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
	HYDRANT			LDS/WWS			CONCRETE	
	VALVE			WATERMAIN			CONCRETE SIDEWALK	
	CURB STOP			GAS			ASPHALT	
	MANHOLE			TRAFFIC SIGNALS			PAVING STONES	
	CATCH BASIN			HYDRO/STREET LIGHT			PAVEMENT REPAIR FABRIC	
	CATCH PIT/CURB INLET			MTS/SHAW			WOOD FENCE	
	HYDRO POLE			CURB RENEWAL			STEEL FENCE	
	LIGHT STANDARD			PROPERTY LINE			BOLLARD	
	TRAFFIC SIGNAL POLE			RAMP CURB			NORTH GUTTER	
	SURVEY BAR			ELEVATIONS			CENTER LINE	
	GEODETIC BENCH MARK			TREE			SOUTH GUTTER	

LOCATION APPROVED UNDERGROUND STRUCTURES

DATE: _____


NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 1B @ N.E. CORNER OF HENDERSON HWY AND DUNROBIN AVE
ELEV. 230.509

**ENGINEERING DIVISION
TECHNOLOGY SERVICES BRANCH
106 - 1155 PACIFIC AVE**

DESIGNED BY: V.S.	CHECKED BY: G.K., R.W.
DRAWN BY: V.S.	APPROVED BY: J.T.S.

HOR. SCALE: 1 : 250
VERTICAL: 1 : 10
DATE: 2025/03/04

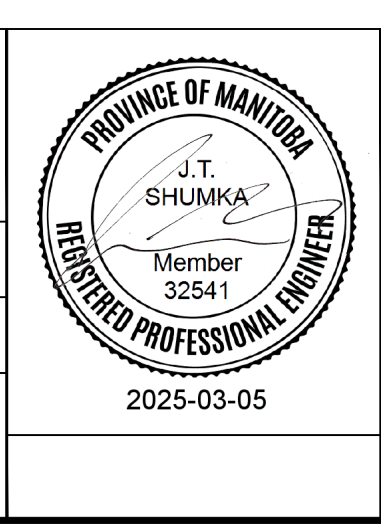

**THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT**

DUNROBIN AVENUE
FROM HENDERSON HWY TO ROCH STREET
PAVEMENT REHABILITATION AND ASSOCIATED WORKS
FROM STA. 7+05 TO STA. 7+27

CITY DRAWING NUMBER SE-25-411	6
SHEET 12 OF 23	