

- CONSTRUCTION NOTES**
- REMOVE EXISTING SIDEWALK AND CONSTRUCT NEW 1.5m SIDEWALK (SD-228A, E24)
  - RENEW EXISTING MONOLITHIC CURB AND SIDEWALK (SD-228B)
  - RENEW EXISTING CURB RAMP (SD-229D)
  - INSTALL NEW DETECTABLE WARNING SURFACE TILE (SD-229AA)
  - RENEW EXISTING CURB RAMP AND CONCRETE BULLNOSE (SD-229B, SD-227C)
  - RE-GRADE EXISTING SIDEWALK BLOCKS
  - RE-GRADE EXISTING INTERLOCKING PAVING STONES
  - REMOVE EXISTING PAVEMENT
  - CONSTRUCT NEW CURB RAMP (SD-229B)
  - REMOVE EXISTING PAVEMENT AND CONSTRUCT 150mm REINFORCED CONCRETE PAVEMENT AS PER SD-235
  - ADJUST FRAME AND COVER TO GRADE AS PER CW3210
  - RE-GRADE AND COMPACT GRAVEL AS DIRECTED BY THE CONTRACT ADMINISTRATOR
  - REPLACE 100mm CONCRETE PRIVATE WALK

- GENERAL NOTES**
- PAVEMENT DIMENSIONS ARE TO BACK OF CURB
  - ALL CURB RADI UNDER 15.0m SHALL BE MODIFIED
  - CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION
  - ADJUST ALL EXISTING WATER VALVES AND CURB STOPS TO GRADE
  - ALL CONCRETE SIDEWALK CONSTRUCTED THROUGH PRIVATE ACCESS SHALL BE 150mm REINFORCED CONCRETE SIDEWALK
  - PAVEMENT REPAIRS SHOWN ARE A REPRESENTATIVE SAMPLE OF THE TENDER QUANTITIES

ISSUED FOR TENDER  
NOT TO BE USED FOR  
CONSTRUCTION

**METRIC**  
WHOLE NUMBERS INDICATE MILLIMETERS  
DECIMALIZED NUMBERS INDICATE METERS  
TENDER NO. 13-2025

⊗	VALVE		CONCRETE		
⊙	CURB STOP		ASPHALT		
○	MANHOLE		CONCRETE SIDEWALK		
□	CATCH BASIN		GRAVEL		
△	CATCH PIT/CURB INLET		BRICK		
⊕	HYDRO POLE		CURB RENEWAL		
⊙	LIGHT STANDARD		PROPERTY LINE		
⊕	TRAFFIC SIGNAL POLE		RAMP CURB		
⊕	HYDRANT		ELEVATIONS	(231.000)	
⊕	EXISTING	LEGEND - PLAN	WOOD FENCE		
⊕	PROPOSED	LEGEND - PLAN	PROPOSED		

**LOCATION APPROVED UNDERGROUND STRUCTURES**

SUPR. U/G STRUCTURES COMMITTEE DATE

**NOTE:**  
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.


B.M. ELEV.					

**ENGINEERING DIVISION  
TECHNOLOGY SERVICES BRANCH  
106 - 1155 PACIFIC AVE**

DESIGNED BY J.W. CHECKED BY A.K., E.H., R.W.  
DRAWN BY J.W. APPROVED BY J.T.S.

HOR. SCALE: 1 : 250  
VERTICAL: 1 : 10

DATE 2025/03/19

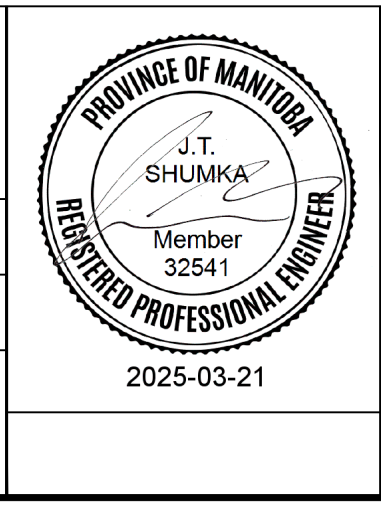

**THE CITY OF WINNIPEG  
PUBLIC WORKS DEPARTMENT**

**BRONSTONE BOULEVARD**  
FROM WEST FERNWOOD AVENUE TO ST MARY'S ROAD  
SIDEWALK RECONSTRUCTION AND ASSOCIATED WORKS  
FROM STA. 1+00 TO STA. 3+40

CITY DRAWING NUMBER SE-25-506  
SHEET 7 OF 25  
1