

- CONSTRUCTION NOTES**
- RENEW EXISTING BARRIER CURB (SD-206A, SD-205)
 - ADJUST FRAME AND COVER TO GRADE AS PER (CW3210)
 - REMOVE EXISTING PAVEMENT AND CONSTRUCT 150mm REINFORCED CONCRETE PAVEMENT
 - RENEW EXISTING CONCRETE SIDEWALK (SD-228A, SD-228AA, E24)
 - CONSTRUCT NEW 100mm CONCRETE SIDEWALK (SD-228A, SD-228AA, E24)
 - CONSTRUCT NEW 80mm (TYP) ASPHALT PAVEMENT OVERLAY (TYPE MS1)
 - RENEW EXISTING CURB RAMP (SD-229D)
 - INSTALL NEW CURB RAMP (SD-229D)
 - INSTALL PAVEMENT REPAIR FABRIC (TYPE A, CW 3140.2)
 - REMOVE EXISTING ASPHALT
 - RE-GRADE EXISTING SIDEWALK BLOCKS
 - RE-GRADE EXISTING INTERLOCKING PAVING STONES
 - REMOVE AND REPLACE EXISTING CURB INLET FRAME WITH INLET BOX AND COVER (SD-222) AND CONNECT TO CATCH BASIN
 - REMOVE EXISTING SIDEWALK
 - RE-GRADE AND COMPACT GRAVEL AS DIRECTED BY THE CONTRACT ADMINISTRATOR
 - REMOVE AND ABANDON EXISTING CURB INLET
 - MILL 50mm (TYP) OF EXISTING ASPHALT
 - REMOVE AND REPLACE EXISTING CURB INLET FRAME WITH INLET BOX AND COVER (SD-221) AND CONNECT 250 Ø PVC PIPE TO EXISTING DRAINAGE PIPE

- GENERAL NOTES**
- PAVEMENT DIMENSIONS ARE TO BACK OF CURB
 - ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED (SD-203B)
 - CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
 - CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION
 - ADJUST ALL EXISTING WATER VALVES AND CURB STOPS TO GRADE
 - PAVEMENT REPAIRS SHOWN ARE A REPRESENTATIVE SAMPLE OF THE TENDER QUANTITIES
 - ASPHALT TIE-INS ON APPROACHES TO BE DETERMINED IN FIELD BY THE CONTRACT ADMINISTRATOR
 - ALL SIDEWALK PLACED THROUGH PRIVATE APPROACHES SHALL BE 150mm REINFORCED AS PER SD-235

ISSUED FOR TENDER
NOT TO BE USED FOR
CONSTRUCTION

METRIC
WHOLE NUMBERS INDICATE MILLIMETERS
DECIMALIZED NUMBERS INDICATE METERS
TENDER NO. 13-2025

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
	FLOW ARROW			PAVEMENT REPAIR FABRIC			BRICK	
	HYDRANT			LDS/WWS			GRAVEL	
	VALVE			WATERMAIN			CONCRETE	
	CURB STOP			GAS			CONCRETE SIDEWALK	
	MANHOLE			TRAFFIC SIGNALS			ASPHALT	
	CATCH BASIN			HYDRO/STREET LIGHT			SHRUB LINE	
	CATCH PIT/CURB INLET			MTS/SHAW			LEGEND - PLAN	
	HYDRO POLE			CURB RENEWAL			WEST GUTTER	
	LIGHT STANDARD			PROPERTY LINE			CENTER LINE	
	TRAFFIC SIGNAL POLE			RAMP CURB			EAST GUTTER	
	SURVEY BAR			ELEVATIONS			BOREHOLE LOCATION	
	TREE			FENCE				


NO.	REVISIONS	DATE	BY
3.	ADDENDUM 1	2025/03/24	J.W.
2.	ISSUED FOR TENDER	2025/03/13	J.W.
1.	PLAN APPROVAL	2025/02/07	A.K.

B.M. 1B AT SOUTH WEST CORNER OF FERMO AND ST DAVID
ELEV. 231.219

ENGINEERING DIVISION
TECHNOLOGY SERVICES BRANCH
106 - 1155 PACIFIC AVE

DESIGNED BY J.W. CHECKED BY E.H., R.W., J.T.S.
DRAWN BY J.W. APPROVED BY J.T.S.

HOR. SCALE: 1 : 250
VERTICAL: 1 : 10
DATE: 2025/03/21

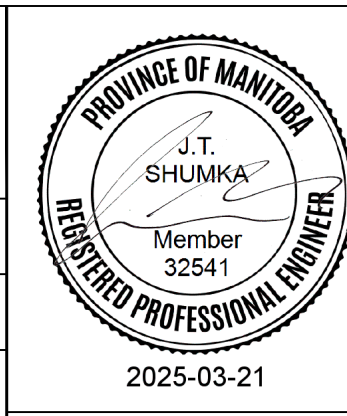

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

ST DAVID ROAD
FROM FERMO AVENUE TO HAVELOCK AVENUE
CONCRETE PAVEMENT REHABILITATION AND ASSOCIATED WORKS
FROM STA. 4+60 TO STA. 5+80

CITY DRAWING NUMBER SE-25-517
SHEET 18 OF 25
4