



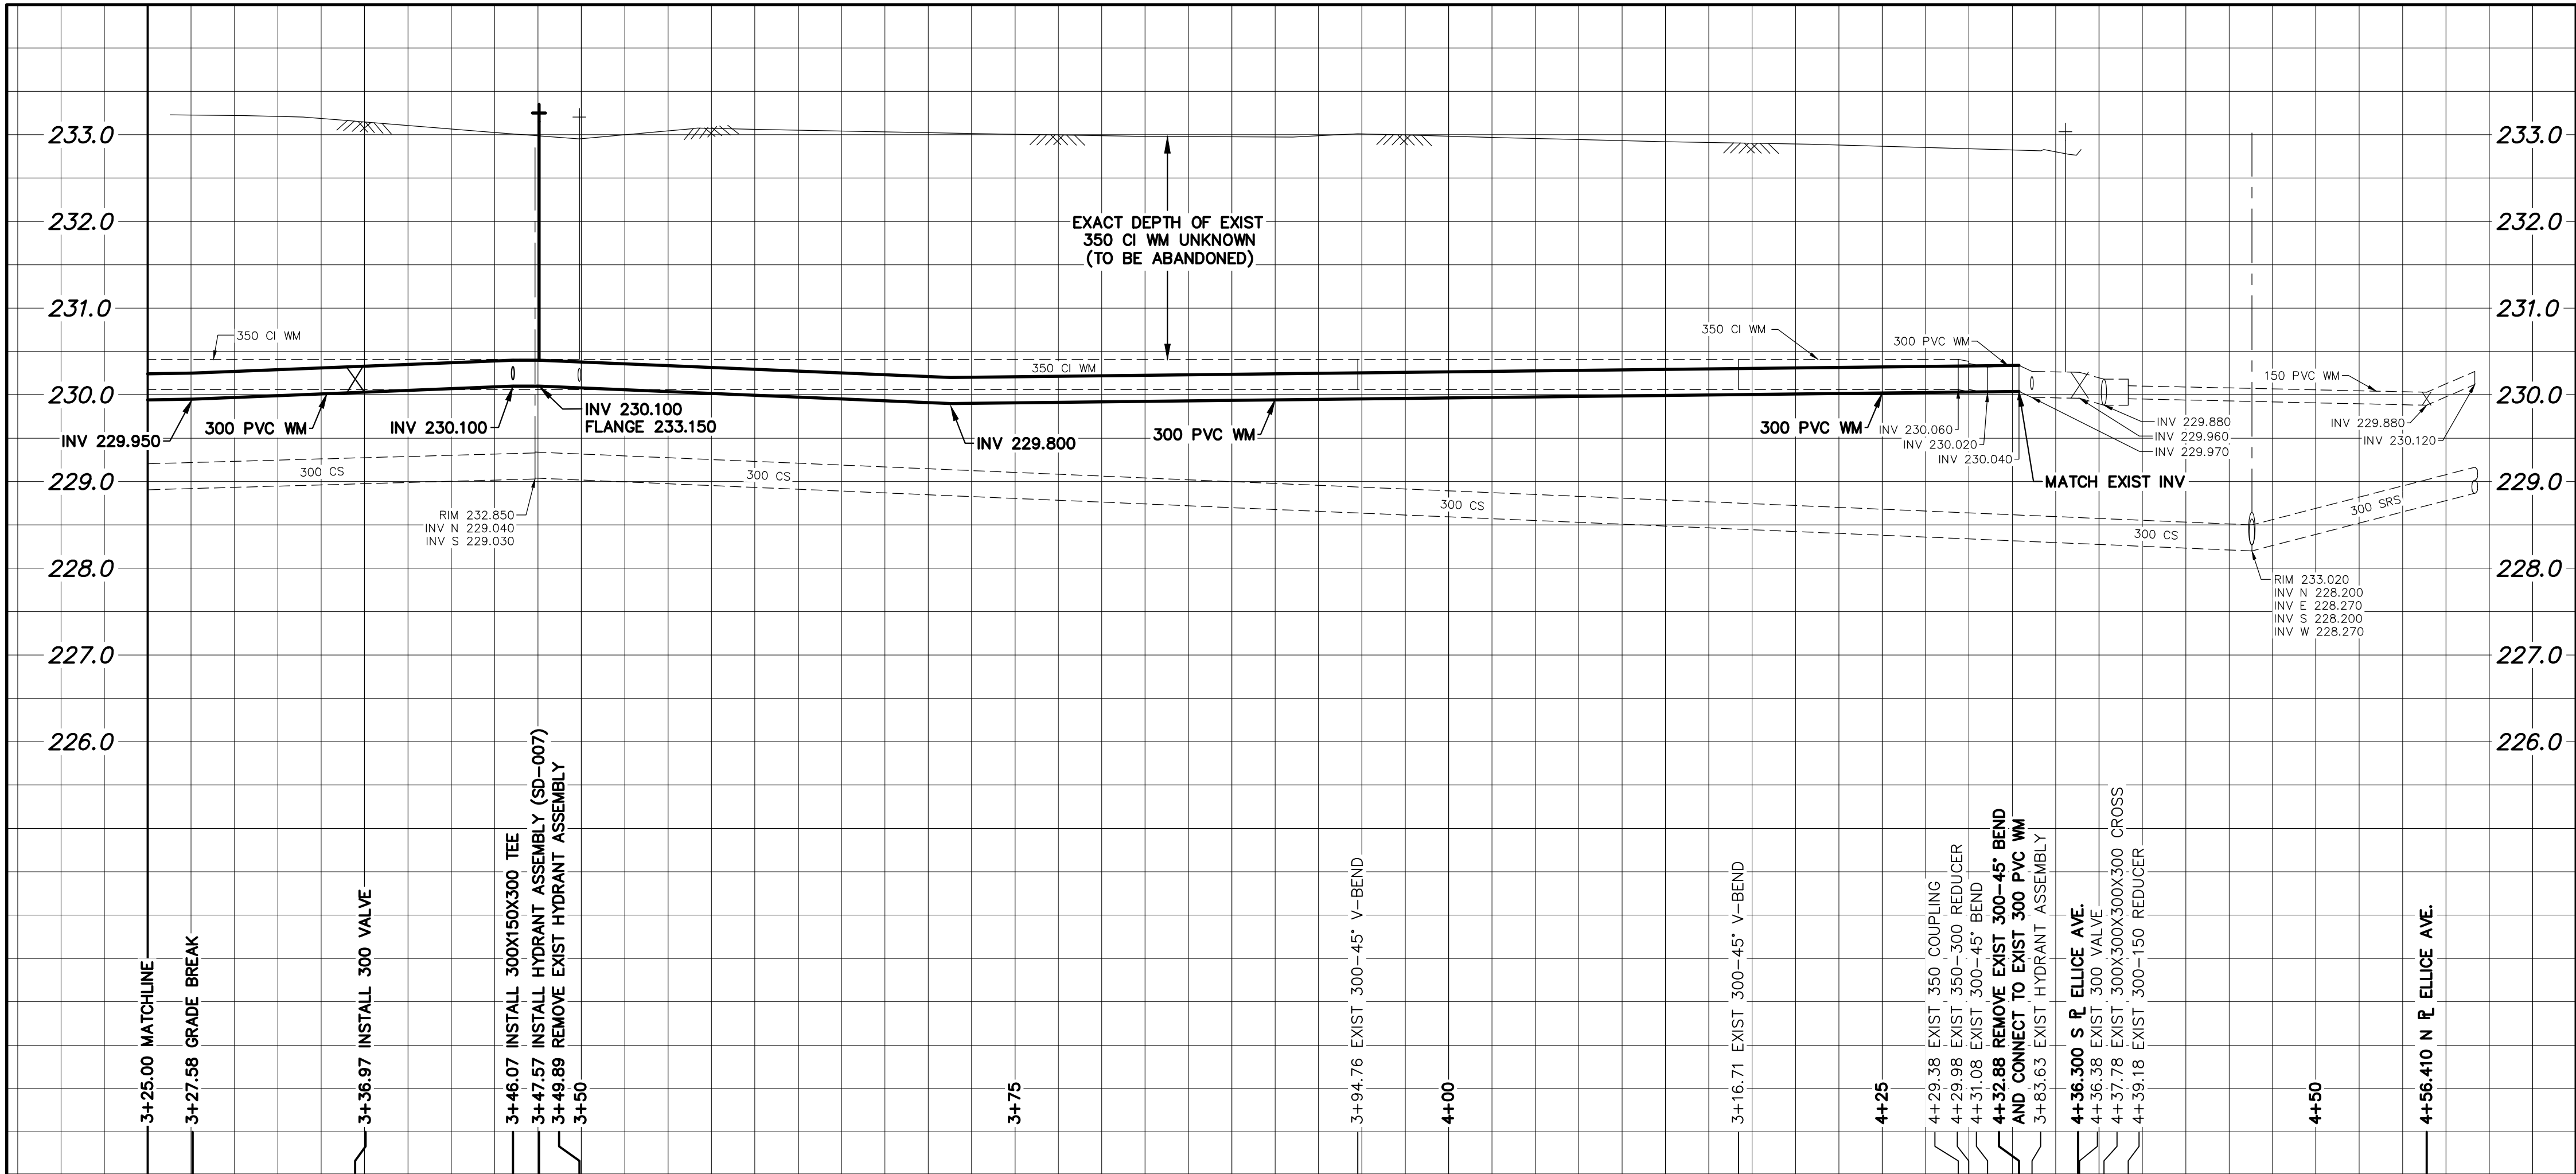

WATER SERVICE INFORMATION					
ADDRESS	SIZE (mm)	SIZE (mm)	SHORT & LONG MEASUREMENT	CORP LOCATION	REMARKS
MATERIAL (STREET)	MATERIAL (PROP.)				
841 GOULDING ST RESIDENTIAL	20 CU	20 CU	0.72 SSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
840 GOULDING ST RESIDENTIAL	20 CU	20 CU	1.90 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
838 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.68 NSL HSE	0.6 N OF S/C	RENEW TO 19mm SERVICE PIPE
837 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	17.980 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
836 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.30 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
833 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	19.500 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
831 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.06 NSL HSE	1.2 S OF S/C	RENEW TO 19mm SERVICE PIPE
830 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	30.170 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
829 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	2.54 NSL HSE	0.3 S OF S/C	RENEW TO 19mm SERVICE PIPE
828 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	30.170 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
827 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.55 SSL HSE	1.8 S OF S/C	RENEW TO 19mm SERVICE PIPE
826 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	45.410 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
825 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.10 SSL HSE	7.8 S OF S/C	RENEW TO 19mm SERVICE PIPE
824 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	45.110 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
823 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.20 SSL HSE	0.3 S OF S/C	RENEW TO 19mm SERVICE PIPE
822 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	55.780 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
821 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	55.780 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
820 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	1.3 N OF S/C	RENEW TO 19mm SERVICE PIPE	RECONNECT SERVICE
819 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.50 NSL HSE	OPP OF S/C	RECONNECT SERVICE
818 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	65.740 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
817 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.70 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
816 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	75.890 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
815 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	75.890 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
814 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.6 N OF S/C	RENEW TO 19mm SERVICE PIPE	RECONNECT SERVICE
813 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.51 NSL HSE	OPP OF S/C	RECONNECT SERVICE
812 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	84.270 SSL ELLICE AVE	OPP OF S/C	RECONNECT SERVICE
811 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	1.70 NSL HSE	OPP OF S/C	RECONNECT SERVICE
810 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	85.940 SSL ELLICE AVE	OPP OF S/C	RECONNECT SERVICE
809 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	97.540 SSL ELLICE AVE	OPP OF S/C	RECONNECT SERVICE
808 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.24 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
807 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	95.030 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
806 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	0.73 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
805 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	97.540 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
804 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.49 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
803 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	105.460 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
802 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	3.60 NSL HSE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE
801 GOULDING ST RESIDENTIAL	20 LEAD	20 LEAD	105.140 SSL ELLICE AVE	OPP OF S/C	RENEW TO 19mm SERVICE PIPE

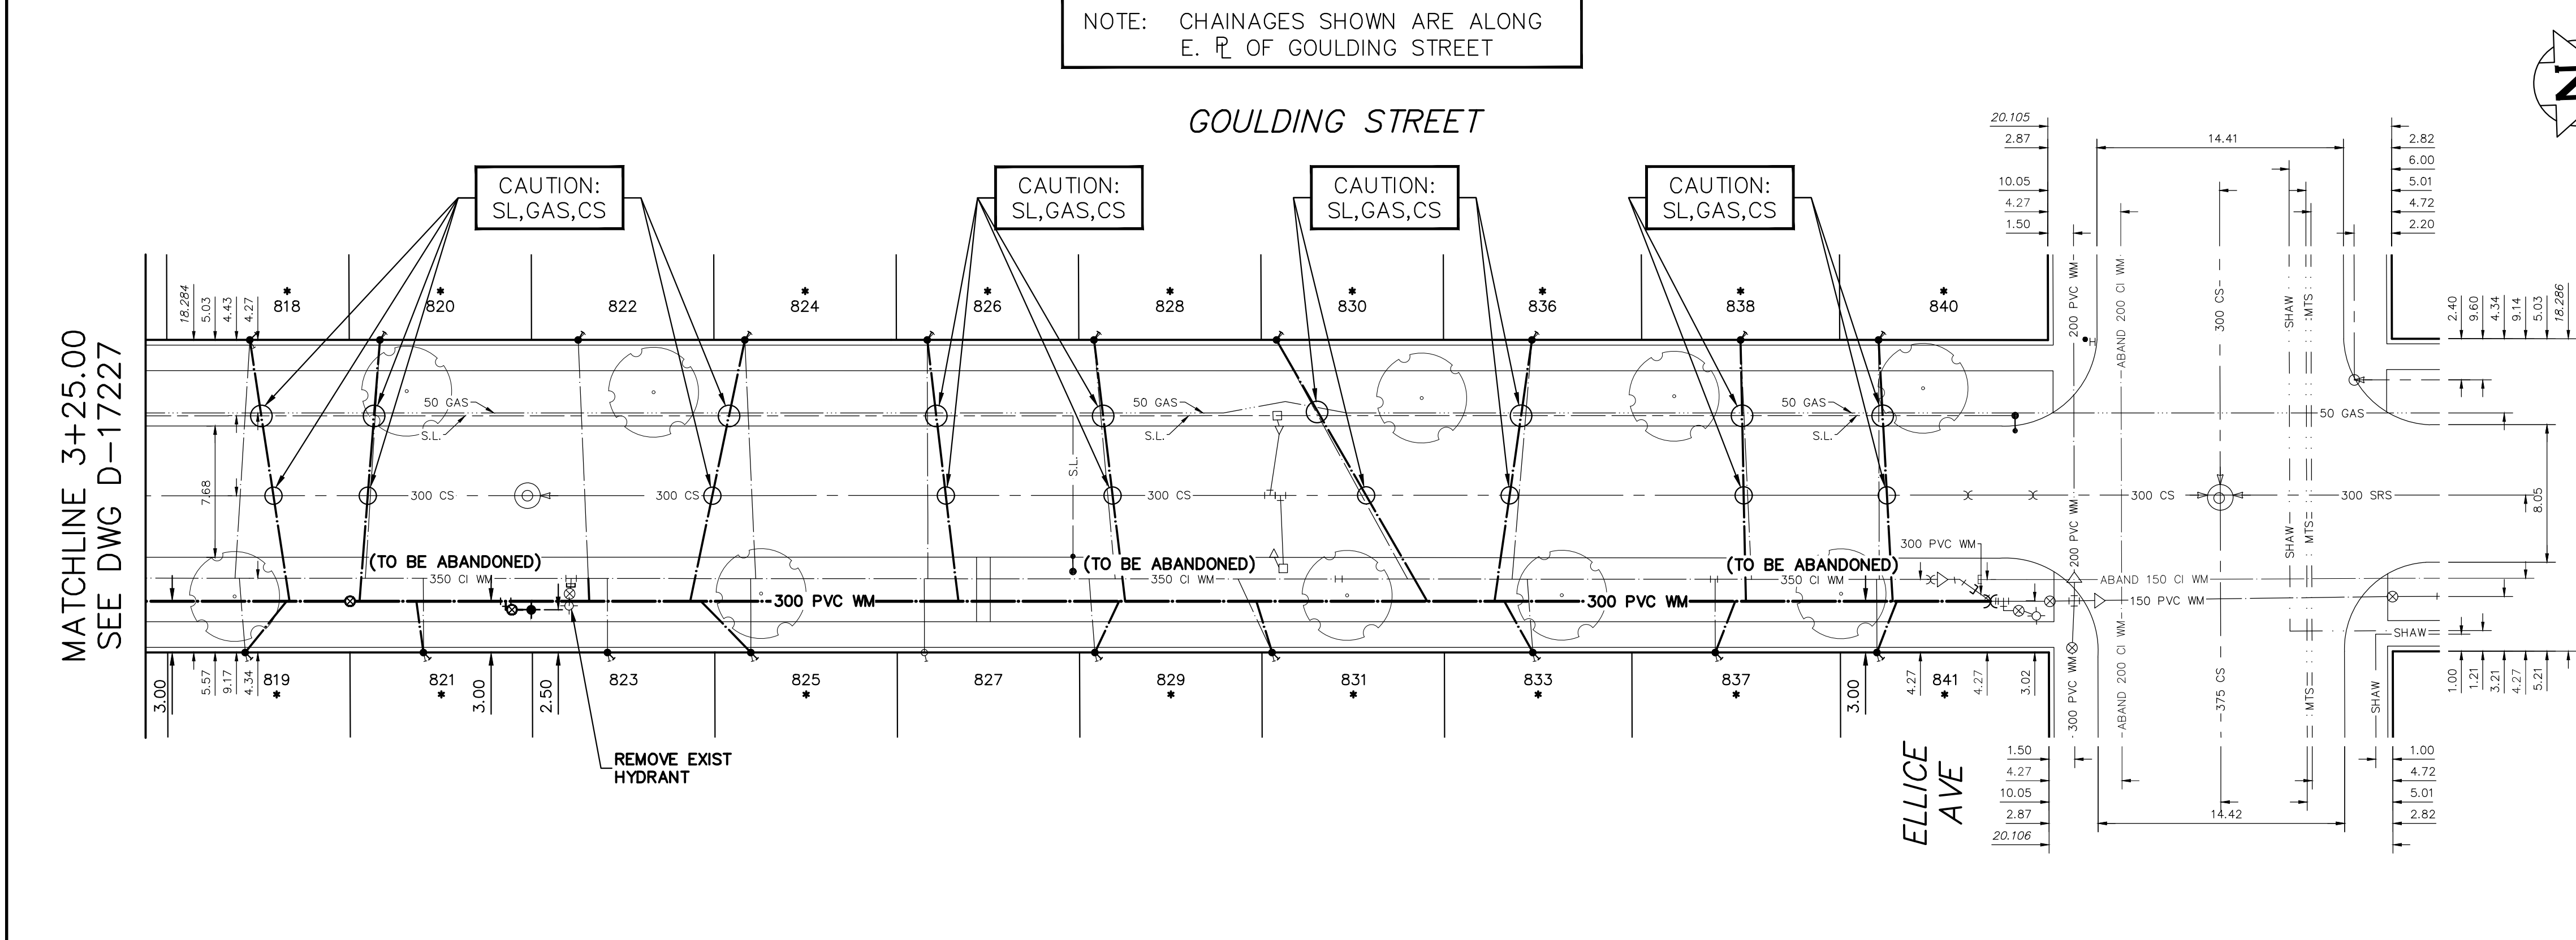

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

- 1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
- 2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

LOCATION APPROVED

UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

VERTICAL DATUM: CGVD28 (HT2.0 Geoid)

HORIZONTAL DATUM: NAD83 (June 1990), Zone 14

DESIGNED BY	TT	CHECKED BY	SC
DRAWN BY	AJ	APPROVED BY	SC
SCALE:		RELEASED FOR CONSTRUCTION	
HORIZONTAL	1:250		
VERTICAL	1:50		
DATE	2025 10 16	DATE	

PLOT DATE: 2025 10 16

ENGINEER'S SEAL

PROVINCE OF MANITOBA

S.R.J. COURNOYER

Member 22699

2025-11-03

REGISTERED PROFESSIONAL ENGINEER

Digitally signed by S.R.J. Cournoyer, P. Eng

CONSULTANT DRAWING NUMBER

—

THE CITY OF WINNIPEG

WATER AND WASTE DEPARTMENT

ENGINEERING DIVISION

2025 WATER MAIN RENEWALS

CONTRACT 6

GOULDING STREET

225 N OF ST MATTHEWS AVENUE TO ELLICE AVENUE

SHEET 3 OF 11

CITY DRAWING NUMBER

D-17226

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES

DECIMALIZED NUMBERS INDICATE METRES

0.0 5.0 10.0 15.0 20.0 25.0

FOR INDEX SEE D-17225

NOTE: ALL VALVES TO BE INSTALLED COUNTERCLOCKWISE TO CLOSE

BID OPP: 131-2025

CONTRACT NUMBER: 6

FILE PATH: R:\DRAWINGS\WATER\RENEWAL\2025 RENEWALS\Cont 6\Construction Dwg\GOULDING ST.dwg