



- 1. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH THE LATEST REVISION OF THE CITY OF WINNIPEG
- STANDARD CONSTRUCTION SPECIFICATIONS. 2. CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION.
- 3. ALL ROADWAY DIMENSIONS SHOWN ARE TO BACK OF CURB. . EXISTING ASPHALT TO BE PLANED AS SHOWN OR AS DIRECTED BY CONTRACT ADMINISTRATOR . 150mm PARTIAL CONCRETE SLAB PATCHES SHOWN ARE ONLY A REPRESENTATIVE APPROXIMATION OF THE
- TENDERED QUANTITIES. EXISTING SIDEWALK TO BE RENEWED AS PER SD-228A AND AS DIRECTED BY CONTRACT ADMINISTRATOR.
- 7. PLANE EXISTING CURB AND INSTALL MODIFIED LIP CURB AS PER SD-202C AND AS DIRECTED BY CONTRACT ADMINISTRATOR.
- 8. ALL PRIVATE WALKWAYS TO BE ADJUSTED TO NEW SIDEWALK OR TOP OF CURB ELEVATION, AS DIRECTED BY THE CONTRACT ADMINISTRATOR. 9. EXISTING LIP CURB AT PRIVATE APPROACHES TO BE RENEWED AS DIRECTED BY CONTRACT ADMINISTRATOR.

 10. PAVEMENT REPAIR FABRIC TO BE INSTALLED AS SHOWN OR AS DIRECTED BY CONTRACT ADMINISTRATOR.

(231.00)

EXISTING

VALVE

CURB STOP

HYDRO POLE & LIGHT STANDARD

○ ✓ ◆ LIGHT STANDARD OR TRAFFIC SIGNAL • ✓ ✓ • →

HYDRO POLE / ANCHOR

FENCE

PROPERTY LINE

IRON BAR

TEST HOLE / PAVEMENT CORE

ELEVATIONS

CURB RAMP

DETECTABLE WARNING SURFACE TILE

LEGEND-PLAN

 \otimes

(231.000)

PROPOSED

EXISTING

- 1. MODIFIED BARRIER CURB TO BE CONSTRUCTED AT ALL INTERSECTION RADII AND ALLEY RADII.
- 12. OVERLAY EXISTING CONCRETE AND ASPHALT RESIDENTIAL APPROACHES AS DIRECTED BY CONTRACT ADMINISTRATOR.
- 13. CONTRACTORS TO TAKE PRECAUTIONARY STEPS TO PROTECT EXISTING TREES WITHIN THE LIMITS OF
- CONSTRUCTION FROM DAMAGE FROM CONSTRUCTION ACTIVITIES AS OUTLINED IN THE SPECIFICATIONS. 14. LAMP STANDARDS, HYDRO POLES, AND ANCHORS THAT REQUIRE TEMPORARY SUPPORT, REMOVAL OR
- REPLACEMENT, TO BE DONE SO AT THE EXPENSE OF THE CONTRACTOR AS NECESSARY. 15. ALL BOULEVARDS TO BE SODDED UNLESS OTHERWISE NOTED. 16. ADJUST ALL WATER VALVES, HYDRANTS, MANHOLES, AND CATCH BASINS IN WORK AREA TO GRADE.

 $\Delta \square \bigcirc$

•

PROPOSED

WATER MAIN

LAND DRAINAGE SEWER

HYDRO

GAS

COMMUNICATIONS

SIGNALS

MANHOLE

CATCH BASIN/CATCH PIT


CURB INLET

UTILITIES ADJUSTED

HYDRANT

LEGEND-PLAN

WASTE WATER SEWER ----

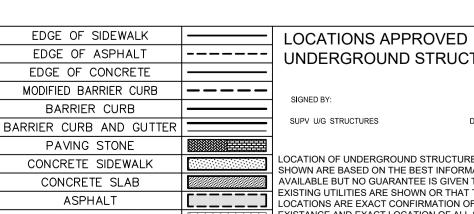

PROPOSED

MILLED SURFACE

PAVEMENT REPAIR FABRIC

LEGEND-PLAN

	UNDERGROUND STRUCTURES	G.B.	
•			
•	SIGNED BY:	7	
•	SUPV U/G STRUCTURES DATE	6	
1		5	
<u>.</u>	LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION	4	
]	AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL	3	
]	EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT CONFIRMATION OF	2	
]	EXISTANCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES	1	
8	BEFORE PROCEEDING	0	ISSUED FOR TEND
		NO.	REVISIONS

G.B. ELE	· ·	VEST BOLT		11	SD		WSP Ca 1600 Buffa Winnipeg, MB t. 204.4
7							f. 204.4
6						T	www.
5				DESIGNED BY	N.T.	CHECKED BY	K.G.
4							
3				DRAWN BY	K.C./W.D./N.T.	APPROVED BY	S.S.
2							
1				HOR. SCALE	1:250	RELEASED FOR CONSTRUCTION	
0	ISSUED FOR TENDER	2025/02/28	K.G.	VERTICAL	1:10	CONSTRUCTION	

DATE BY

2.0%

VARIES

EXISTING LIP CURB

INSTALL MODIFIED LIP

CURB AS PER SD-202C

(75mm REVEAL) (TYP.)

TO BE PLANED

18.29

7.65

J 70-90 mm ASPHALT PAVEMENT OVERLAY

DATE DECEMBER 2024 DATE

TEXISTING 150mm CONCRETE PAVEMENT

TYPICAL CROSS-SECTION

5.48 BOULEVARD

VARIES

WSP Canada Inc.	ENGINEER'S SEAL
1600 Buffalo Place	
innipeg, MB R3T 6B8	
t. 204.477.6650	
f. 204.474.2864	
www.wsp.com	
K.G.	

CA0043425.6941-04

THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT **ENGINEERING SERVICES DIVISION**

2025 LOCAL STREET RENEWALS					
MCMULLEN CRESCENT					

MAJOR REHABILITATION

STA. 1+80 TO STA. 3+00.78

FOR TENDER PURPOSES ONLY

NOT FOR CONSTRUCTION

CITY DRAWING NUMBER					
SHEET	04	OF	26		
TENDER NO. 167-2025					

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES

DECIMALIZED NUMBERS INDICATE METRES

ENGINEERS GEOSCIENTISTS

Certificate of Authorization

WSP Canada Inc.

No. 5750

MANITOBA

EXISTING