



**THE CITY OF WINNIPEG**

**TENDER**

**TENDER NO. 65-2025**

**CEMENT STABILIZATION OF GRAVEL SURFACE BACK LANES**

## TABLE OF CONTENTS

### PART A - BID SUBMISSION

- Form A: Bid/Proposal
- Form B: Prices
- Form G1: Bid Bond and Agreement to Bond

### PART B - BIDDING PROCEDURES

B1. Contract Title	1
B2. Submission Deadline	1
B3. Enquiries	1
B4. Confidentiality	1
B5. Addenda	1
B6. Substitutes	2
B7. Bid Components	3
B8. Bid	3
B9. Prices	4
B10. Disclosure	4
B11. Conflict of Interest and Good Faith	4
B12. Qualification	5
B13. Bid Security	7
B14. Opening of Bids and Release of Information	7
B15. Irrevocable Bid	8
B16. Withdrawal of Bids	8
B17. Evaluation of Bids	8
B18. Award of Contract	8

### PART C - GENERAL CONDITIONS

C0. General Conditions	1
------------------------	---

### PART D - SUPPLEMENTAL CONDITIONS

#### General

D1. General Conditions	1
D2. Scope of Work	1
D3. Site Investigation Due Diligence and Risk	2
D4. Definitions	2
D5. Contract Administrator	3
D6. Contractor's Supervisor	3
D7. Accessible Customer Service Requirements	3
D8. Unfair Labour Practices	3
D9. Furnishing of Documents	4

#### Submissions

D10. Authority to Carry on Business	4
D11. Safe Work Plan	4
D12. Insurance	5
D13. Contract Security	5
D14. Subcontractor List	6
D15. Equipment List	6
D16. Requirements for Site Accessibility Plan	6

#### Schedule of Work

D17. Commencement	7
D18. Working Days	8
D19. Restricted Work Hours	8
D20. Sequence of Work	8
D21. Critical Stages	9
D22. Substantial Performance	9

D23. Total Performance	9
D24. Liquidated Damages	9
D25. Supply Chain Disruption Schedule Delays	10
<b>Control of Work</b>	
D26. Job Meetings	10
D27. Prime Contractor – The Workplace Safety and Health Act (Manitoba)	11
D28. The Workplace Safety and Health Act (Manitoba) – Qualifications	11
<b>Measurement and Payment</b>	
D29. Cement Tickets	11
D30. Payment	11
D31. Payment Schedule	11
<b>Warranty</b>	
D32. Warranty	11
<b>Dispute Resolution</b>	
D33. Dispute Resolution	11
<b>Indemnity</b>	
D34. Indemnity	12
<b>Third Party Agreements</b>	
D35. Funding and/or Contribution Agreement Obligations	13
Form J: Subcontractor List	16
Form K: Equipment	17

## **PART E - SPECIFICATIONS**

<b>General</b>	
E1. Applicable Specifications and Drawings	1
E2. Mobilization and Demobilization Payment	2
E3. Protection of Existing Trees	3
E4. Traffic Control	3
E5. Traffic Management	4
E6. Refuse and Recycling Collection	4
E7. Water Obtained from the City	5
E8. Surface Restorations	5
E9. Cement Stabilization of Gravel Surface Backlanes	5
E10. Pruning of Existing Trees and Shrubs	8

## **APPENDIX A – PROJECT LOCATIONS**

## **APPENDIX B – ALTERNATE LOCATIONS**

## **PART B - BIDDING PROCEDURES**

### **B1. CONTRACT TITLE**

B1.1 CEMENT STABILIZATION OF GRAVEL SURFACE BACK LANES

### **B2. SUBMISSION DEADLINE**

B2.1 The Submission Deadline is 12:00 noon Winnipeg time, February 27, 2025.

B2.2 The Contract Administrator or the Manager of Purchasing may extend the Submission Deadline by issuing an addendum at any time prior to the time and date specified in B2.1.

### **B3. ENQUIRIES**

B3.1 All enquiries shall be directed to the Contract Administrator identified in D5.1.

B3.2 If the Bidder finds errors, discrepancies or omissions in the Tender, or is unsure of the meaning or intent of any provision therein, the Bidder shall notify the Contract Administrator of the error, discrepancy or omission, or request a clarification as to the meaning or intent of the provision at least five (5) Business Days prior to the Submission Deadline.

B3.3 Responses to enquiries which, in the sole judgment of the Contract Administrator, require a correction to or a clarification of the Tender will be provided by the Contract Administrator to all Bidders by issuing an addendum.

B3.4 Responses to enquiries which, in the sole judgment of the Contract Administrator, do not require a correction to or a clarification of the Tender will be provided by the Contract Administrator only to the Bidder who made the enquiry.

B3.5 The Bidder shall not be entitled to rely on any response or interpretation received pursuant to B3 unless that response or interpretation is provided by the Contract Administrator in writing.

B3.6 Any enquiries concerning submitting through MERX should be addressed to:  
MERX Customer Support  
Phone: 1-800-964-6379  
Email: merx@merx.com

### **B4. CONFIDENTIALITY**

B4.1 Information provided to a Bidder by the City or acquired by a Bidder by way of further enquiries or through investigation is confidential. Such information shall not be used or disclosed in any way without the prior written authorization of the Contract Administrator. The use and disclosure of the confidential information shall not apply to information which:

- (a) was known to the Bidder before receipt hereof; or
- (b) becomes publicly known other than through the Bidder; or
- (c) is disclosed pursuant to the requirements of a governmental authority or judicial order.

B4.2 The Bidder shall not make any statement of fact or opinion regarding any aspect of the Tender to the media or any member of the public without the prior written authorization of the Contract Administrator.

### **B5. ADDENDA**

B5.1 The Contract Administrator may, at any time prior to the Submission deadline, issue addenda correcting errors, discrepancies or omissions in the Tender, or clarifying the meaning or intent of any provision therein.

- B5.2 The Contract Administrator will issue each addendum at least two (2) Business Days prior to the Submission Deadline, or provide at least two (2) Business Days by extending the Submission Deadline.
- B5.3 Addenda will be available on the MERX website at [www.merx.com](http://www.merx.com).
- B5.4 The Bidder is responsible for ensuring that they have received all addenda and is advised to check the MERX website for addenda regularly and shortly before the Submission Deadline, as may be amended by addendum.
- B5.5 The Bidder shall acknowledge receipt of each addendum in Paragraph 10 of Form A: Bid/Proposal. Failure to acknowledge receipt of an addendum may render a Bid non-responsive.
- B5.6 Notwithstanding B3, enquiries related to an Addendum may be directed to the Contract Administrator indicated in D5.

## **B6. SUBSTITUTES**

- B6.1 The Work is based on the Plant, Materials and methods specified in the Tender.
- B6.2 Substitutions shall not be allowed unless application has been made to and prior approval has been granted by the Contract Administrator in writing.
- B6.3 Requests for approval of a substitute will not be considered unless received in writing by the Contract Administrator at least five (5) Business Days prior to the Submission Deadline.
- B6.4 The Bidder shall ensure that any and all requests for approval of a substitute:
- (a) provide sufficient information and details to enable the Contract Administrator to determine the acceptability of the Plant, Material or method as either an approved equal or alternative;
  - (b) identify any and all changes required in the applicable Work, and all changes to any other Work, which would become necessary to accommodate the substitute;
  - (c) identify any anticipated cost or time savings that may be associated with the substitute;
  - (d) certify that, in the case of a request for approval as an approved equal, the substitute will fully perform the functions called for by the general design, be of equal or superior substance to that specified, is suited to the same use and capable of performing the same function as that specified and can be incorporated into the Work, strictly in accordance with the proposed work schedule and the dates specified in the Supplemental Conditions for Substantial Performance and Total Performance;
  - (e) certify that, in the case of a request for approval as an approved alternative, the substitute will adequately perform the functions called for by the general design, be similar in substance to that specified, is suited to the same use and capable of performing the same function as that specified and can be incorporated into the Work, strictly in accordance with the proposed work schedule and the dates specified in the Supplemental Conditions for Substantial Performance and Total Performance.
- B6.5 The Contract Administrator, after assessing the request for approval of a substitute, may in their sole discretion grant approval for the use of a substitute as an “approved equal” or as an “approved alternative”, or may refuse to grant approval of the substitute.
- B6.6 The Contract Administrator will provide a response in writing, at least two (2) Business Days prior to the Submission Deadline, to the Bidder who requested approval of the substitute.
- B6.6.1 The Contract Administrator will issue an Addendum, disclosing the approved materials, equipment, methods and products to all potential Bidders. The Bidder requesting and obtaining the approval of a substitute shall be responsible for disseminating information regarding the approval to any person or persons they wish to inform.

- B6.7 If the Contract Administrator approves a substitute as an “approved equal”, any Bidder may use the approved equal in place of the specified item.
- B6.8 If the Contract Administrator approves a substitute as an “approved alternative”, any Bidder bidding that approved alternative may base their Total Bid Price upon the specified item but may also indicate an alternative price based upon the approved alternative. Such alternatives will be evaluated in accordance with B17.
- B6.9 No later claim by the Contractor for an addition to the Total Bid Price because of any other changes in the Work necessitated by the use of an approved equal or an approved alternative will be considered.

## **B7. BID COMPONENTS**

- B7.1 The Bid shall consist of the following components:
- (a) Form A: Bid;
  - (b) Form B: Prices;
  - (c) Form G1: Bid Bond and Agreement to Bond.
- B7.2 All components of the Bid shall be fully completed or provided, and submitted by the Bidder no later than the Submission Deadline, with all required entries made clearly and completely.
- B7.3 The Bid shall be submitted electronically through MERX at [www.merx.com](http://www.merx.com).
- B7.3.1 Bids will **only** be accepted electronically through MERX.
- B7.4 Bidders are advised that inclusion of terms and conditions inconsistent with the Tender document, including the General Conditions, will be evaluated in accordance with B17.1(a).

## **B8. BID**

- B8.1 The Bidder shall complete Form A: Bid/Proposal, making all required entries.
- B8.2 Paragraph 2 of Form A: Bid/Proposal shall be completed in accordance with the following requirements:
- (a) if the Bidder is a sole proprietor carrying on business in their own name, their name shall be inserted;
  - (b) if the Bidder is a partnership, the full name of the partnership shall be inserted;
  - (c) if the Bidder is a corporation, the full name of the corporation shall be inserted;
  - (d) if the Bidder is carrying on business under a name other than their own, the business name and the name of every partner or corporation who is the owner of such business name shall be inserted.
- B8.2.1 If a Bid is submitted jointly by two or more persons, each and all such persons shall identify themselves in accordance with B8.2.
- B8.3 In Paragraph 3 of Form A: Bid/Proposal, the Bidder shall identify a contact person who is authorized to represent the Bidder for purposes of the Bid.
- B8.4 Paragraph 13 of Form A: Bid/Proposal shall be signed in accordance with the following requirements:
- (a) if the Bidder is a sole proprietor carrying on business in their own name, it shall be signed by the Bidder;
  - (b) if the Bidder is a partnership, it shall be signed by the partner or partners who have authority to sign for the partnership;
  - (c) if the Bidder is a corporation, it shall be signed by their duly authorized officer or officers;

- (d) if the Bidder is carrying on business under a name other than their own, it shall be signed by the registered owner of the business name, or by the registered owner's authorized officials if the owner is a partnership or a corporation.

B8.4.1 The name and official capacity of all individuals signing Form A: Bid/Proposal should be entered below such signatures.

B8.5 If a Bid is submitted jointly by two or more persons, the word "Bidder" shall mean each and all such persons, and the undertakings, covenants and obligations of such joint Bidders in the Bid and the Contract, when awarded, shall be both joint and several.

## **B9. PRICES**

B9.1 The Bidder shall state a price in Canadian funds for each item of the Work identified on Form B: Prices.

B9.1.1 Prices stated on Form B: Prices shall not include any costs which may be incurred by the Contractor with respect to any applicable funding agreement obligations as outlined in D35. Any such costs shall be determined in accordance with D35.

B9.2 The quantities listed on Form B: Prices are to be considered approximate only. The City will use said quantities for the purpose of comparing Bids.

B9.3 The quantities for which payment will be made to the Contractor are to be determined by the Work actually performed and completed by the Contractor, to be measured as specified in the applicable Specifications.

B9.4 Payments to Non-Resident Contractors are subject to Non-Resident Withholding Tax pursuant to the Income Tax Act (Canada).

B9.5 The Bidder shall enter the Total Bid Price from Form B: Prices into the Total Bid Price field in MERX.

B9.5.1 Bidders are advised that the calculation indicated in B17.4 will prevail over the Total Bid Price entered in MERX.

## **B10. DISCLOSURE**

B10.1 Various Persons provided information or services with respect to this Work. In the City's opinion, this relationship or association does not create a conflict of interest because of this full disclosure. Where applicable, additional material available as a result of contact with these Persons is listed below.

B10.2 The Persons are:

- (a) N/A

## **B11. CONFLICT OF INTEREST AND GOOD FAITH**

B11.1 Further to C3.2, Bidders, by responding to this Tender, declare that no Conflict of Interest currently exists, or is reasonably expected to exist in the future.

B11.2 Conflict of Interest means any situation or circumstance where a Bidder or employee of the Bidder proposed for the Work has:

- (a) other commitments;
- (b) relationships;
- (c) financial interests; or
- (d) involvement in ongoing litigation;

that could or would be seen to:

- (i) exercise an improper influence over the objective, unbiased and impartial exercise of the independent judgment of the City with respect to the evaluation of Bids or award of the Contract; or
  - (ii) compromise, impair or be incompatible with the effective performance of a Bidder's obligations under the Contract;
- (e) has contractual or other obligations to the City that could or would be seen to have been compromised or impaired as a result of their participation in the Tender process or the Work; or
- (f) has knowledge of confidential information (other than confidential information disclosed by the City in the normal course of the Tender process) of strategic and/or material relevance to the Tender process or to the Work that is not available to other bidders and that could or would be seen to give that Bidder an unfair competitive advantage.

**B11.3** In connection with their Bid, each entity identified in B11.2 shall:

- (a) avoid any perceived, potential or actual Conflict of Interest in relation to the procurement process and the Work;
- (b) upon discovering any perceived, potential or actual Conflict of Interest at any time during the Tender process, promptly disclose a detailed description of the Conflict of Interest to the City in a written statement to the Contract Administrator; and
- (c) provide the City with the proposed means to avoid or mitigate, to the greatest extent practicable, any perceived, potential or actual Conflict of Interest and shall submit any additional information to the City that the City considers necessary to properly assess the perceived, potential or actual Conflict of Interest.

**B11.4** Without limiting B11.3, the City may, in their sole discretion, waive any and all perceived, potential or actual Conflicts of Interest. The City's waiver may be based upon such terms and conditions as the City, in their sole discretion, requires to satisfy itself that the Conflict of Interest has been appropriately avoided or mitigated, including requiring the Bidder to put into place such policies, procedures, measures and other safeguards as may be required by and be acceptable to the City, in their sole discretion, to avoid or mitigate the impact of such Conflict of Interest.

**B11.5** Without limiting B11.3, and in addition to all contractual or other rights or rights at law or in equity or legislation that may be available to the City, the City may, in their sole discretion:

- (a) disqualify a Bidder that fails to disclose a perceived, potential or actual Conflict of Interest of the Bidder or any of their employees proposed for the Work;
- (b) require the removal or replacement of any employees proposed for the Work that has a perceived, actual or potential Conflict of Interest that the City, in their sole discretion, determines cannot be avoided or mitigated;
- (c) disqualify a Bidder or employees proposed for the Work that fails to comply with any requirements prescribed by the City pursuant to B11.4 to avoid or mitigate a Conflict of Interest; and
- (d) disqualify a Bidder if the Bidder, or one of their employees proposed for the Work, has a perceived, potential or actual Conflict of Interest that, in the City's sole discretion, cannot be avoided or mitigated, or otherwise resolved.

**B11.6** The final determination of whether a perceived, potential or actual Conflict of Interest exists shall be made by the City, in their sole discretion.

## **B12. QUALIFICATION**

**B12.1** The Bidder shall:

- (a) undertake to be in good standing under The Corporations Act (Manitoba), or properly registered under The Business Names Registration Act (Manitoba), or otherwise properly registered, licensed or permitted by law to carry on business in Manitoba; and



- (b) be financially capable of carrying out the terms of the Contract; and
  - (c) have all the necessary experience, capital, organization, and equipment to perform the Work in strict accordance with the terms and provisions of the Contract.
- B12.2 The Bidder and any proposed Subcontractor (for the portion of the Work proposed to be subcontracted to them) shall:
- (a) be responsible and not be suspended, debarred or in default of any obligations to the City. A list of suspended or debarred individuals and companies is available on the Information Connection page at The City of Winnipeg, Corporate Finance, Purchasing Division website at <https://www.winnipeg.ca/matmgt/Templates/files/debar.pdf>
- B12.3 The Bidder and/or any proposed Subcontractor (for the portion of the Work proposed to be subcontracted to them) shall:
- (a) have successfully carried out work similar in nature, scope and value to the Work; and
  - (b) be fully capable of performing the Work required to be in strict accordance with the terms and provisions of the Contract; and
  - (c) have a written workplace safety and health program if required pursuant to The Workplace Safety and Health Act (Manitoba);
  - (d) have completed the Accessible Customer Service online training required by the Accessibility for Manitobans Act (AMA) (see B12.5 and D7)
- B12.4 Further to B12.3(c), the Bidder shall, within five (5) Business Days of a request by the Contract Administrator, provide proof satisfactory to the Contract Administrator that the Bidder/Subcontractor has a workplace safety and health program meeting the requirements of The Workplace Safety and Health Act (Manitoba), by providing:
- (a) Written confirmation of a safety and health certification meeting SAFE Work Manitoba's SAFE Work Certified Standard (e.g., COR™ and SECOR™) in the form of:
    - (i) a copy of their valid Manitoba COR certificate and Letter of Good Standing (or Manitoba equivalency) as issued under the Certificate of Recognition (COR) Program administered by the Construction Safety Association of Manitoba or by the Manitoba Heavy Construction Association's WORKSAFELY™ COR™ Program; or
    - (ii) a copy of their valid Manitoba SECOR™ certificate and Letter of Good Standing (or Manitoba equivalency) as issued under the Small Employer Certificate of Recognition Program (SECOR™) administered by the Construction Safety Association of Manitoba or by the Manitoba Heavy Construction Association's WORKSAFELY™ COR™ Program; or
  - (b) a report or letter to that effect from an independent reviewer acceptable to the City. (A list of acceptable reviewers and the review template are available on the Information Connection page at The City of Winnipeg, Corporate Finance, Purchasing Division website at <http://www.winnipeg.ca/matmgt/>).
- B12.5 Further to B12.3(d), the Bidder acknowledges they and all Subcontractors have obtained training required by the Accessibility for Manitobans Act (AMA) available at [Accessibility Training](#) for anyone that may have any interaction with the public on behalf of the City of Winnipeg.
- B12.6 The Bidder shall submit, within three (3) Business Days of a request by the Contract Administrator, proof satisfactory to the Contract Administrator of the qualifications of the Bidder and of any proposed Subcontractor.
- B12.7 The Bidder shall provide, on the request of the Contract Administrator, full access to any of the Bidder's equipment and facilities to confirm, to the Contract Administrator's satisfaction, that the Bidder's equipment and facilities are adequate to perform the Work.

### **B13. BID SECURITY**

- B13.1 The Bidder shall include in their Bid Submission bid security in the form of a digital bid bond, in the amount of at least ten percent (10%) of the Total Bid Price, and agreement to bond of a company registered to conduct the business of a surety in Manitoba, in Form G1: Bid Bond and Agreement to Bond, available at [Form G1 Bid Bond & Agreement to Bond](#).
- B13.2 Bid security shall be submitted in a digital format meeting the following criteria:
- (a) The version submitted by the Bidder must have valid digital signatures and seals;
  - (b) The version submitted by the Bidder must be verifiable by the City with respect to the totality and wholeness of the bond form, including: the content; all digital signatures and digital seals; with the surety company, or an approved verification service provider of the surety company.
  - (c) The version submitted must be viewable, printable and storable in standard electronic file formats compatible with the City, and in a single file. Allowable formats include pdf.
  - (d) The verification may be conducted by the City immediately or at any time during the life of the bond and at the discretion of the City with no requirement for passwords or fees.
  - (e) The results of the verification must provide a clear, immediate and printable indication of pass or fail regarding B13.2(a).
- B13.3 Bonds failing the verification process will not be considered to be valid and the bid shall be determined to be non-responsive in accordance with B17.1(a).
- B13.4 Bonds passing the verification process will be treated as original and authentic.
- B13.4.1 If the Bidder submits alternative bids, the bid security shall be in the amount of the specified percentage of the highest Total Bid Price submitted.
- B13.5 The bid security of the successful Bidder and the next two lowest evaluated responsive and responsible Bidders will be released by the City when a Contract for the Work has been duly formed with the successful Bidder and the contract securities are furnished as provided herein. The bid securities of all other Bidders will be released when a Contract is awarded.
- B13.6 The bid securities of all Bidders will be released by the City as soon as practicable following notification by the Contract Administrator to the Bidders that no award of Contract will be made pursuant to the Tender.

### **B14. OPENING OF BIDS AND RELEASE OF INFORMATION**

- B14.1 Bids will not be opened publicly.
- B14.2 Following the submission deadline, the names of the Bidders and their Total Bid Prices (unevaluated, and pending review and verification of conformance with requirements) will be available on the MERX website at [www.merx.com](http://www.merx.com).
- B14.3 After award of Contract, the name(s) of the successful Bidder(s) and their Contract amount(s) will be available on the MERX website at [www.merx.com](http://www.merx.com).
- B14.4 The Bidder is advised that any information contained in any Bid may be released if required by The Freedom of Information and Protection of Privacy Act (Manitoba), by other authorities having jurisdiction, or by law or by City policy or procedures (which may include access by members of City Council).
- B14.4.1 To the extent permitted, the City shall treat as confidential information, those aspects of a Bid Submission identified by the Bidder as such in accordance with and by reference to Part 2, Section 17 or Section 18 or Section 26 of The Freedom of Information and Protection of Privacy Act (Manitoba), as amended.

**B15. IRREVOCABLE BID**

- B15.1 The Bid(s) submitted by the Bidder shall be irrevocable for the time period specified in Paragraph 11 of Form A: Bid/Proposal.
- B15.2 The acceptance by the City of any Bid shall not release the Bids of the next two lowest evaluated responsive Bidders and these Bidders shall be bound by their Bids on such Work until a Contract for the Work has been duly formed and the contract securities have been furnished as herein provided, but any Bid shall be deemed to have lapsed unless accepted within the time period specified in Paragraph 11 of Form A: Bid/Proposal.

**B16. WITHDRAWAL OF BIDS**

- B16.1 A Bidder may withdraw their Bid without penalty prior to the Submission Deadline.

**B17. EVALUATION OF BIDS**

- B17.1 Award of the Contract shall be based on the following bid evaluation criteria:
- (a) compliance by the Bidder with the requirements of the Tender, or acceptable deviation therefrom (pass/fail);
  - (b) qualifications of the Bidder and the Subcontractors, if any, pursuant to B12 (pass/fail);
  - (c) Total Bid Price;
  - (d) economic analysis of any approved alternative pursuant to B6.
- B17.2 Further to B17.1(a), the Award Authority may reject a Bid as being non-responsive if the Bid is incomplete, obscure or conditional, or contains additions, deletions, alterations or other irregularities. The Award Authority may reject all or any part of any Bid, or waive technical requirements or minor informalities or irregularities, if the interests of the City so require.
- B17.3 Further to B17.1(b), the Award Authority shall reject any Bid submitted by a Bidder who does not demonstrate, in their Bid or in other information required to be submitted, that they are qualified.
- B17.4 Further to B17.1(c), the Total Bid Price shall be the sum of the quantities multiplied by the unit prices for each item shown on Form B: Prices.
- B17.4.1 Further to B17.1(a), in the event that a unit price is not provided on Form B: Prices, the City may determine the unit price by dividing the Amount (extended price) by the approximate quantity, for the purposes of evaluation and payment.
- B17.4.2 Bidders are advised that the calculation indicated in B17.4 will prevail over the Total Bid Price entered in MERX.

**B18. AWARD OF CONTRACT**

- B18.1 The City will give notice of the award of the Contract or will give notice that no award will be made.
- B18.2 The City will have no obligation to award a Contract to a Bidder, even though one or all of the Bidders are determined to be qualified, and the Bids are determined to be responsive.
- B18.2.1 Without limiting the generality of B18.2, the City will have no obligation to award a Contract where:
- (a) the prices exceed the available City funds for the Work;
  - (b) the prices are materially in excess of the prices received for similar work in the past;
  - (c) the prices are materially in excess of the City's cost to perform the Work, or a significant portion thereof, with their own forces;

- (d) only one Bid is received; or
- (e) in the judgment of the Award Authority, the interests of the City would best be served by not awarding a Contract.

- B18.3** If funding for the Work is provided to the City of Winnipeg by the Government of Manitoba and/or the Government of Canada, Bidders are advised that the terms of D35 shall immediately take effect upon confirmation of such funding, regardless of when funding is confirmed.
- B18.4** Where an award of Contract is made by the City, the award shall be made to the qualified Bidder submitting the lowest evaluated responsive Bid, in accordance with B17.
- B18.4.1** Following the award of contract, a Bidder will be provided with information related to the evaluation of their Bid upon written request to the Contract Administrator.

## PART C - GENERAL CONDITIONS

### C0. GENERAL CONDITIONS

- C0.1 The *General Conditions for Construction* (Revision 2020-01-31) are applicable to the Work of the Contract.
- C0.1.1 The *General Conditions for Construction* are available on the Information Connection page at The City of Winnipeg, Corporate Finance, Purchasing Division website at [http://www.winnipeg.ca/matmgt/gen\\_cond.stm](http://www.winnipeg.ca/matmgt/gen_cond.stm)
- C0.2 A reference in the Tender to a section, clause or subclause with the prefix “**C**” designates a section, clause or subclause in the *General Conditions for Construction*.

## PART D - SUPPLEMENTAL CONDITIONS

### GENERAL

#### D1. GENERAL CONDITIONS

D1.1 In addition to the General Conditions for Construction, these Supplemental Conditions are applicable to the Work of the Contract.

#### D2. SCOPE OF WORK

D2.1 The Work to be done under the Contract shall consist of:

- (a) Pulvimixing and cement stabilization of gravel surface back lanes (See APPENDIX A for maps of locations noted below).
  - (i) Location 1 St David Rd from Hull Ave to Fermor Ave - East Side of St David Rd
  - (ii) Location 2 Fernwood Ave from St David Rd to St George Rd - South Side of Fernwood Ave
  - (iii) Location 3 Thorndale Ave from St Mary's Rd to St David Rd - South Side of Thorndale Ave (Include East Side of St Mary's Rd from Frederick Ave to Thorndale Ave)
  - (iv) Location 4 Havelock Ave from St Mary's Rd to Neepawa St - South Side of Havelock Ave (Include East Side of St Mary's Rd from Portland Ave to Havelock Ave)
  - (v) Location 5 St Vital Rd from St Vital Rd to Tod Dr - North Side of St Vital Rd
  - (vi) Location 6 Kingston Row from Edinburgh St to Killarney St - South Side of Kingston Row
  - (vii) Location 7 Kingston Cr from Riverdale Ave to East Limit - South Side of Kingston Cr
  - (viii) Location 8 Kingston Cr from West Limit to Riverdale Ave - South Side of Kingston Cr
  - (ix) Location 9 Eldridge Ave from West Limit to Laxdal Rd - North Side of Eldridge Ave
- (b) Daylighting and sampling of alternate locations to replace any above locations deemed unsuitable for cement stabilization due to in-situ material or utilities (See APPENDIX B for maps of locations noted below).
  - (i) Alternate 1 Larche Cr from Larche Cr to Larche Cr - East Side of Larche Cr
  - (ii) Alternate 2 Regent Ave from Roanoke St to Leola St - North Side of Regent Ave
  - (iii) Alternate 3 Stranmillis Ave from Des Meurons St to Eggerton Rd - South Side of Stranmillis St (Include West Side of Eggerton Rd from Stranmillis Ave to Imperial Ave)

D2.2 The major components of the Work are as follows:

- (a) Provide a mix design for each type of soil;
- (b) Submit and attain underground clearances;
- (c) Daylighting of the location and depths of utilities;

- (d) Traffic control;
- (e) Garbage and recycling collection;
- (f) Blending of Portland and Duraflex cementitious materials;
- (g) Pulverise the top three hundred (300)mm of the gravel surface;
- (h) Apply blended cement to pulverized gravel surface;
- (i) Mix cement, soil and water and compact to a dense surface;
- (j) Final profile of gravel surface must meet detailed drawing grades or as determined by the Contract Administrator; and
- (k) The Contractor is responsible for the removal or placement of material to achieve proposed design profile.

### **D3. SITE INVESTIGATION DUE DILIGENCE AND RISK**

D3.1 Notwithstanding C3.1, the Contractor acknowledges that the site investigation reports and other site information included in this Tender have been provided to it and may be relied upon by the Contractor to the extent that the Contractor uses Good Industry Practice in interpreting such report(s) and site information and carries out the Work in accordance with Good Industry Practice based upon such report(s) and the information contained in them and such other site information. In the event that a site condition related to:

- (a) the location of any utility which can be determined from the records or other information available at the offices of any public authority or person, including a municipal corporation and any board or commission thereof, having jurisdiction or control over the utility;
- (b) the Site conditions, including but not limited to subsurface hazardous materials or other concealed physical conditions;
- (c) the location, nature, quality or quantity of the materials to be removed or to be employed in the performance of the Work;
- (d) the nature, quality or quantity of the Plant needed to perform the Work;
- (e) all matters concerning access to the Site, power supplies, location of existing services, utilities or materials necessary for the completion of the Work; and
- (f) all other matters which could in any way affect the performance of the Work;

that could not have been “properly inferable”, “readily apparent” and readily discoverable” using Good Industry Practice by the Contractor, results in additional Work which is a direct result of this newly discovered site condition, such additional Work will be considered by the City under Changes in Work.

### **D4. DEFINITIONS**

D4.1 When used in this Tender:

- (a) ” **Blended Cement**” means a blend of Portland and Duraflex cementitious materials;
- (b) ” **Gravel Surface**” means means a backlane that has a surface comprising of limestone or gravel or a street consisting of a gravel base overlaid with a chip seal.
- (c) ” **Supply Chain Disruption**” means an inability by the Contractor to obtain goods or services from third parties necessary to perform the Work of the Contract within the schedule specified therein, despite the Contractor making all reasonable commercial efforts to procure same. Contractors are advised that increased costs do not, in and of themselves, amount to a Supply Chain Disruption;

## **D5. CONTRACT ADMINISTRATOR**

D5.1 The Contract Administrator is:

Michael Sawchuk, C.E.T  
Contracts and Technology Supervisor

Telephone No. 204 986-7409

Email Address [msawchuk@winnipeg.ca](mailto:msawchuk@winnipeg.ca)

D5.2 At the pre-construction meeting, the Contract Administrator will identify additional personnel representing the Contract Administrator and their respective roles and responsibilities for the Work.

## **D6. CONTRACTOR'S SUPERVISOR**

D6.1 At the pre-construction meeting, the Contractor shall identify their designated supervisor and any additional personnel representing the Contractor and their respective roles and responsibilities for the Work.

D6.2 At least two (2) Business Days prior to the commencement of any Work on the site, the Contractor shall provide the Contract Administrator with a phone number where the supervisor identified in D6.1 or an alternate can be contacted twenty-four (24) hours a day to respond to an emergency.

## **D7. ACCESSIBLE CUSTOMER SERVICE REQUIREMENTS**

D7.1 The Accessibility for Manitobans Act (AMA) imposes obligations on The City of Winnipeg to provide accessible customer service to all persons in accordance with the Customer Service Standard Regulation ("CSSR") to ensure inclusive access and participation for all people who live, work or visit Winnipeg regardless of their abilities.

D7.1.1 The Contractor agrees to comply with the accessible customer service obligations under the CSSR and further agrees that when providing the Goods or Services or otherwise acting on the City of Winnipeg's behalf, shall comply with all obligations under the AMA applicable to public sector bodies.

D7.1.2 The accessible customer service obligations include, but are not limited to:

- (a) providing barrier-free access to goods and services;
- (b) providing reasonable accommodations;
- (c) reasonably accommodating assistive devices, support persons, and support animals;
- (d) providing accessibility features e.g. ramps, wide aisles, accessible washrooms, power doors and elevators;
- (e) inform the public when accessibility features are not available;
- (f) providing a mechanism or process for receiving and responding to public feedback on the accessibility of all goods and services; and
- (g) providing adequate training of staff and documentation of same.

## **D8. UNFAIR LABOUR PRACTICES**

D8.1 Further to C3.2, the Contractor declares that in bidding for the Work and in entering into this Contract, the Contractor and any proposed Subcontractor(s) conduct their respective business in accordance with established international codes embodied in United Nations Universal Declaration of Human Rights (UDHR) <https://www.un.org/en/about-us/universal-declaration-of-human-rights> International Labour Organization (ILO) [https://www.ilo.org/global/lang--en/index.htm](https://www.ilo.org/global/lang-en/index.htm) conventions as ratified by Canada.



- D8.2 The City of Winnipeg is committed and requires its Contractors and their Subcontractors, to be committed to upholding and promoting international human and labour rights, including fundamental principles and rights at work covered by ILO eight (8) fundamental conventions and the United Nations Universal Declaration of Human Rights which includes child and forced labour.
- D8.3 Upon request from the Contract Administrator, the Contractor shall provide disclosure of the sources (by company and country) of the raw materials used in the Work and a description of the manufacturing environment or processes (labour unions, minimum wages, safety, etc.).
- D8.4 Failure to provide the evidence required under D8.3, may be determined to be an event of default in accordance with C18.
- D8.5 In the event that the City, in its sole discretion, determines the Contractor to have violated the requirements of this section, it will be considered a fundamental breach of the Contract and the Contractor shall pay to the City a sum specified by the Contract Administrator in writing (“Unfair Labour Practice Penalty”). Such a violation shall also be considered an Event of Default, and shall entitle the City to pursue all other remedies it is entitled to in connection with same pursuant to the Contract.
- D8.5.1 The Unfair Labour Practice Penalty shall be such a sum as determined appropriate by the City, having due regard to the gravity of the Contractor’s violation of the above requirements, any cost of obtaining replacement goods/ services or rectification of the breach, and the impact upon the City’s reputation in the eyes of the public as a result of same.
- D8.5.2 The Contractor shall pay the Unfair Labour Practice Penalty to the City within thirty (30) Calendar Days of receiving a demand for same in accordance with D8.5. The City may also hold back the amount of the Unfair Labour Practice Penalty from payment for any amount it owes the Contractor.
- D8.5.3 The obligations and rights conveyed by this clause survive the expiry or termination of this Contract, and may be exercised by the City following the performance of the Work, should the City determine, that a violation by the Contractor of the above clauses has occurred following same. In no instance shall the Unfair Labour Practice Penalty exceed the total of twice the Contract value.

## **D9. FURNISHING OF DOCUMENTS**

- D9.1 Upon award of the Contract, the Contractor will be provided with ‘issued for construction’ Contract Documents electronically, including Drawings in PDF format only.

## **SUBMISSIONS**

### **D10. AUTHORITY TO CARRY ON BUSINESS**

- D10.1 The Contractor shall be in good standing under The Corporations Act (Manitoba), or properly registered under The Business Names Registration Act (Manitoba), or otherwise properly registered, licensed or permitted by law to carry on business in Manitoba, or if the Contractor does not carry on business in Manitoba, in the jurisdiction where the Contractor does carry on business, throughout the term of the Contract, and shall provide the Contract Administrator with evidence thereof upon request.

### **D11. SAFE WORK PLAN**

- D11.1 The Contractor shall provide the Contract Administrator with a Safe Work Plan at least five (5) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in C4.1 for the return of the executed Contract Documents, if applicable.

D11.2 The Safe Work Plan shall be prepared and submitted in the format shown in the City's template which is available on the Information Connection page at The City of Winnipeg, Corporate Finance, Purchasing Division website at <http://www.winnipeg.ca/matmgt/safety/default.stm>

D11.3 Notwithstanding B12.4 at any time during the term of the Contract, the City may, at their sole discretion and acting reasonably, require an updated COR Certificate or Annual Letter of good Standing. A Contractor, who fails to provide a satisfactory COR Certificate or Annual Letter of good Standing, will not be permitted to continue to perform any Work.

## **D12. INSURANCE**

D12.1 The Contractor shall provide and maintain the following insurance coverage:

- (a) commercial general liability insurance, in the amount of at least two million dollars (\$2,000,000.00) inclusive, with The City of Winnipeg added as an additional insured, with a cross-liability clause, such liability policy to also contain contractual liability, unlicensed motor vehicle liability, non-owned automobile liability, and products and completed operations, to remain in place at all times during the performance of the Work and throughout the warranty period;
- (b) if applicable, Automobile Liability Insurance covering all motor vehicles, owned and operated and used or to be used by the Contractor directly or indirectly in the performance of the Work. The Limit of Liability shall not be less than \$2,000,000 inclusive for loss or damage including personal injuries and death resulting from any one accident or occurrence;
- (c) an all risks property insurance/contractors equipment policy to cover all machinery, equipment and tools to be used in connection with the Work.

D12.2 Deductibles shall be borne by the Contractor.

D12.3 All policies shall be taken out with insurers licensed to carry on business in the Province of Manitoba.

D12.4 The Contractor shall provide the City Solicitor with a certificate(s) of insurance, in a form satisfactory to the City Solicitor, at least two (2) Business Days prior to the commencement of any Work but in no event later than the date specified in the C4.1 for the return of the executed Contract Documents, as applicable.

D12.5 The Contractor shall not cancel, materially alter, or cause each policy to lapse without providing at least thirty (30) Calendar Days prior written notice to the Contract Administrator.

## **D13. CONTRACT SECURITY**

D13.1 The Contractor shall provide and maintain the performance bond and the labour and material payment bond until the expiration of the warranty period in the form of:

- (a) a performance bond of a company registered to conduct the business of a surety in Manitoba, [Form H1 Performance Bond](#), in the amount of fifty percent (50%) of the Contract Price; and
- (b) a labour and material payment bond of a company registered to conduct the business of a surety in Manitoba, [Form H2 Labour and Material Bond](#), in an amount equal to fifty percent (50%) of the Contract Price.

D13.1.1 Where the contract security is a performance bond, it may be submitted in hard copy or digital format. If submitted in digital format the contract security must meet the following criteria:

- (a) the version submitted by the Contractor must have valid digital signatures and seals;
- (b) the version submitted by the Contractor must be verifiable by the City with respect to the totality and wholeness of the bond form, including: the content; all digital

signatures and digital seals; with the surety company, or an approved verification service provider of the surety company.

- (c) the version submitted must be viewable, printable and storable in standard electronic file formats compatible with the City, and in a single file. Allowable formats include pdf.
- (d) the verification may be conducted by the City immediately or at any time during the life of the bond and at the discretion of the City with no requirement for passwords or fees.
- (e) the results of the verification must provide a clear, immediate and printable indication of pass or fail regarding D13.1(b).

D13.1.2 Digital bonds failing the verification process will not be considered to be valid and may be determined to be an event of default in accordance with C18.1. If a digital bond fails the verification process, the Contractor may provide a replacement bond (in hard copy or digital format) within seven (7) Calendar Days of the City's request or within such greater period of time as the City in their discretion, exercised reasonably, allows.

D13.1.3 Digital bonds passing the verification process will be treated as original and authentic.

D13.2 The Contractor shall provide the Contract Administrator identified in D5 with the required performance and labour and material payment bonds within seven (7) Calendar Days of notification of the award of the Contract by way of an award letter and prior to the commencement of any Work on the Site but in no event later than the date specified in C4.1 for the return of the executed Contract Documents, if applicable.

D13.3 The Contractor shall, as soon as practicable after entering into a contract with a Subcontractor:

- (a) give the Subcontractor written notice of the existence of the labour and material payment bond in D13.1(b); and
- (b) post a notice of the bond and/or a copy of that bond in a conspicuous location at the Site of the Work.

#### **D14. SUBCONTRACTOR LIST**

D14.1 The Contractor shall provide the Contract Administrator with a complete list of the Subcontractors whom the Contractor proposes to engage (Form J: Subcontractor List) at or prior to a pre-construction meeting, or at least two (2) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in the C4.1 for the return of the executed Contract Documents, if applicable.

#### **D15. EQUIPMENT LIST**

D15.1 The Contractor shall provide the Contract Administrator with a complete list of the equipment which the Contractor proposes to utilize (Form K: Equipment List) at or prior to a pre-construction meeting, or at least two (2) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in the C4.1 for the return of the executed Contract Documents, if applicable.

#### **D16. REQUIREMENTS FOR SITE ACCESSIBILITY PLAN**

D16.1 The Contractor shall provide the Contract Administrator with an Accessibility Plan at least five (5) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in C4.1 for the return of the executed Contract Documents, if applicable.

D16.2 The Accessibility Plan shall demonstrate how the Contractor will accommodate the safe passage of pedestrians and cyclists in accordance with the Manual of Temporary Traffic Control, the Contract Drawings, Staging Plans, and Streets By-Law No. 1481/77 at all times for the duration of the Construction. Unless noted in the Contract, the Accessibility Plan must include a written plan for the following:

- (a) How the Contractor will maintain at least one crossing in each direction for each intersection (one north/south crosswalk and one east/west crosswalk).
  - (b) How the Contractor will maintain access to bus stops within the site.
  - (c) How the Contractor will maintain access to pedestrian corridors and half signals.
  - (d) How the Contractor will maintain cycling facilities.
  - (e) How the Contractor will maintain access to residents and businesses unless otherwise noted in the Contract.
  - (f) Any required detour signage at adjacent crossings to facilitate sidewalk or active transportation pathway closures.
- D16.3 The Accessibility Plan may also include figures, sketches, or drawings to demonstrate the proposed plan.
- D16.4 The Accessibility Plan shall include written details on how the Contractor intends to review, maintain, and document all items related to the Accessibility Plan on-site during Construction, including, but not limited to:
- (a) Signage
  - (b) Temporary Ramping
  - (c) Transit Stops
  - (d) Detour Signage
- D16.5 At minimum, the Contractor shall review the site conditions on a daily basis to ensure that all features related to the Accessibility Plan are in place. The site review is intended to correct deficiencies as a result of unforeseen events such as wind, traffic, or the general public. Deficiencies that are direct result of the Contractors actions must be corrected immediately.
- D16.6 Any changes to the Accessibility Plan must be approved by the Contract Administrator.
- D16.7 Upon request from the Contract Administrator, the Contractor shall provide records demonstrating that the site has been maintained.
- D16.8 Deficiencies as a direct result of actions by the Contractor that are not immediately corrected and/or failure to produce records that demonstrate that the site was maintained in compliance with the Accessibility Plan may result in a pay adjustment via the monthly Progress Payment. The rate of pay adjustment will be as per the following schedule:
- (a) First Offence – A warning will be issued and documented in the weekly or bi-weekly site meeting.
  - (b) Second Offence – A field instruction to immediately correct the site will be issued by the Contract Administrator.
  - (c) Third and subsequent Offences – A pay reduction will be issued in the amount of \$250.00 per instance and per day.

## **SCHEDULE OF WORK**

### **D17. COMMENCEMENT**

- D17.1 The Contractor shall not commence any Work until they are in receipt of an award letter from the Award Authority authorizing the commencement of the Work.
- D17.2 The Contractor shall not commence any Work on the Site until:
- (a) the Contract Administrator has confirmed receipt and approval of:
    - (i) evidence of authority to carry on business specified in D10;
    - (ii) evidence of the workers compensation coverage specified in C6.15;

- (iii) the twenty-four (24) hour emergency response phone number specified in D6.2.
  - (iv) the Safe Work Plan specified in D11;
  - (v) evidence of the insurance specified in D12;
  - (vi) the contract security specified in D13;
  - (vii) the subcontractor list specified in D14;
  - (viii) the equipment list specified in D15;
  - (ix) the Requirements for Site Accessibility Plan specified in D16; and
  - (x) the direct deposit application form specified in D30
- (b) the Contractor has attended a pre-construction meeting with the Contract Administrator, or the Contract Administrator has waived the requirement for a pre-construction meeting.
- D17.3 The Contractor shall commence the Work on the Site within seven (7) Working Days of receipt of the award letter.
- D17.4 The City intends to award this Contract by April 1, 2025.
- D17.4.1 If the actual date of award is later than the intended date, the dates specified for Critical Stages, Substantial Performance, and Total Performance will be adjusted by the difference between the aforementioned intended and actual dates.

## **D18. WORKING DAYS**

- D18.1 Further to C1.1(tt);
- D18.1.1 The Contract Administrator will determine daily if a Working Day has elapsed and will record their assessment. On a weekly basis the Contract Administrator will provide the Contractor with a record of the Working Days assessed for the preceding week. The Contractor shall sign each report signifying that they agree with the Contract Administrator's determination of the Working Days assessed for the report period.
- D18.1.2 Work done to restore the Site to a condition suitable for Work, shall not be considered "work" as defined in the definition of a Working Day.
- D18.1.3 When the Work includes two or more major types of Work that can be performed under different atmospheric conditions, the Contract Administrator shall consider all major types of Work in determining whether the Contractor was able to work in assessing Working Days.
- D18.2 Work on Site shall not commence until the Contract Administrator considers requirements of D21.1(a) to have been met.
- D18.3 Further to D18.2, Working Days will not accumulate during the time period between the award of Contract and the acceptance of Critical Stage D21.1(b) by the Contract Administrator.

## **D19. RESTRICTED WORK HOURS**

- D19.1 Further to 3.10 of CW 1130, the Contractor shall require written permission forty-eight (48) hours in advance from the Contract Administrator for any work to be performed between 2000 hours and 0700 hours, or on Saturdays, Sundays, Statutory Holidays and or Civic Holidays.

## **D20. SEQUENCE OF WORK**

- D20.1 The Contractor shall accommodate reasonable alternations in the routine or scheduling that the City may deem necessary or desirable due to concurrent street renewal projects in close proximity and unforeseen circumstance.

The following backlanes shall be cement stabilized first:

- (a) Location 1 – St David Rd from Hull Ave to Fermor Ave - East Side of St David Rd

(b) Location 2 – Fernwood Ave from St David Rd to St George Rd - South Side of Fernwood Ave

(c) Location 3 - Thorndale Ave from St David Rd to St Mary's Rd - South Side of Thorndale Ave (Include East Side of St Mary's Rd from Thorndale Ave to Frederick Ave)

## **D21. CRITICAL STAGES**

D21.1 The Contractor shall achieve critical stages of the Work in accordance with the following requirements:

- (a) June 1, 2025 – Provide mix design for each project location;
- (b) June 1, 2025 – Daylighting Utilities for location and depth;
- (c) August 29, 2025 – Stabilization of Gravel Surface Back lanes.

D21.2 When the Contractor considers the Work associated with D21.1(c) to be completed, the Contractor shall arrange, attend and assist in the inspection of the Work with the Contract Administrator for purposes of verifying Completion. Any defects or deficiencies in the Work noted during that inspection shall be remedied by the Contractor at the earliest possible instance and the Contract Administrator notified so that the Work can be re-inspected.

D21.3 The date on which the D21.1(c) Work has been accepted by the Contract Administrator as being completed to the requirements of the Contract is the date on which completion of D21.1(c) has been achieved.

## **D22. SUBSTANTIAL PERFORMANCE**

D22.1 The Contractor shall achieve Substantial Performance within twenty-five (25) consecutive Working Days of the commencement of the Work as specified in D17.

D22.2 When the Contractor considers the Work to be substantially performed, the Contractor shall arrange, attend and assist in the inspection of the Work with the Contract Administrator for purposes of verifying Substantial Performance. Any defects or deficiencies in the Work noted during that inspection shall be remedied by the Contractor at the earliest possible instance and the Contract Administrator notified so that the Work can be re-inspected.

D22.3 The date on which the Work has been certified by the Contract Administrator as being substantially performed to the requirements of the Contract through the issue of a certificate of Substantial Performance is the date on which Substantial Performance has been achieved.

## **D23. TOTAL PERFORMANCE**

D23.1 The Contractor shall achieve Total Performance within thirty (30) consecutive Working Days of the commencement of the Work as specified in D17.

D23.2 When the Contractor or the Contract Administrator considers the Work to be totally performed, the Contractor shall arrange, attend and assist in the inspection of the Work with the Contract Administrator for purposes of verifying Total Performance. Any defects or deficiencies in the Work noted during that inspection shall be remedied by the Contractor at the earliest possible instance and the Contract Administrator notified so that the Work can be re-inspected.

D23.3 The date on which the Work has been certified by the Contract Administrator as being totally performed to the requirements of the Contract through the issue of a certificate of Total Performance is the date on which Total Performance has been achieved.

## **D24. LIQUIDATED DAMAGES**

D24.1 If the Contractor fails to achieve Critical Stages, Substantial Performance or Total Performance in accordance with the Contract by the days fixed herein for same, the Contractor shall pay the

City the following amounts per Working Day for each and every Working Day following the days fixed herein for same during which such failure continues:

- (a) June 1, 2025 – Provide a mix design for each project location – Three Hundred dollars (\$300);
- (b) June 1, 2025 – Daylighting Utilities for location and depth – Five Hundred dollars (\$500);
- (c) Substantial Performance – Two Thousand dollars (\$2000);
- (d) Total Performance – One Thousand dollars (\$1000).

D24.2 The amounts specified for liquidated damages in D24.1 are based on a genuine pre-estimate of the City's losses in the event that the Contractor does not achieve critical stages, Substantial Performance or Total Performance by the days fixed herein for same.

D24.3 The City may reduce any payment to the Contractor by the amount of any liquidated damages assessed.

## **D25. SUPPLY CHAIN DISRUPTION SCHEDULE DELAYS**

D25.1 The City acknowledges that the schedule for this Contract may be impacted by the Supply Chain Disruption. Commencement and progress of the Work shall be performed by the Contractor with due consideration to the delivery requirements and schedule identified in the Contract, in close consultation with the Contract Administrator.

D25.2 If the Contractor is delayed in the performance of the Work by reason of the Supply Chain Disruption, the Work schedule may be adjusted by a period of time equal to the time lost due to such delay and costs related to such delay will be determined as identified herein.

D25.3 A minimum of seven (7) Calendar Days prior to the commencement of Work, the Contractor shall declare whether a Supply Chain Disruption will affect the start date. The Contractor shall provide sufficient evidence that the delay is directly related to ordering of Material or Goods, production and/or manufacturing schedules or availability of staff as appropriate s.

D25.4 For any delay related to Supply Chain Disruption and identified after Work has commenced, the Contractor shall within seven (7) Calendar Days of becoming aware of the anticipated delay declare the additional delay and shall provide sufficient evidence as indicated in D25.3. Failure to provide this notice will result in no additional time delays being considered by the City.

D25.5 The Work schedule, including the durations identified in D19 to D23 where applicable, will be adjusted to reflect delays accepted by the Contract Administrator. No additional payment will be made for adjustment of schedules except where seasonal work, not previously identified in the Contract, is carried over to the following construction season.

D25.6 Where Work not previously identified is being carried over solely as a result of delays related to Supply Chain Disruption, as confirmed by the Contract Administrator, the cost of temporary works to maintain the Work in a safe manner until Work recommences, will be considered by the Contract Administrator. Where the Work is carried over only partially due to Supply Chain Disruption, a partial consideration of the cost of temporary works will be considered by the Contract Administrator.

D25.7 Any time or cost implications as a result of Supply Chain Disruption and in accordance with the above, as confirmed by the Contract Administrator, shall be documented in accordance with C7.

## **CONTROL OF WORK**

### **D26. JOB MEETINGS**

D26.1 Regular weekly job meetings will be held at Site. These meetings shall be attended by a minimum of one (1) representative of the Contract Administrator, and one (1) representative of the Contractor. Each representative shall be a responsible person capable of expressing the

position of the Contract Administrator, and the Contractor respectively on any matter discussed at the meeting including the Work schedule and the need to make any revisions to the Work schedule. The progress of the Work will be reviewed at each of these meetings.

D26.2 The Contract Administrator reserves the right to cancel any job meeting or call additional job meetings whenever they deem it necessary.

**D27. PRIME CONTRACTOR – THE WORKPLACE SAFETY AND HEALTH ACT (MANITOBA)**

D27.1 Further to C6.26, the Contractor shall be the Prime Contractor and shall serve as, and have the duties of the Prime Contractor in accordance with The Workplace Safety and Health Act (Manitoba).

**D28. THE WORKPLACE SAFETY AND HEALTH ACT (MANITOBA) – QUALIFICATIONS**

D28.1 Further to B12.4, the Contractor/Subcontractor must, throughout the term of the Contract, have a Workplace Safety and Health Program meeting the requirements of The Workplace Safety and Health Act (Manitoba). At any time during the term of the Contract, the City may, at their sole discretion and acting reasonably, require updated proof of compliance, as set out in B12.4.

**MEASUREMENT AND PAYMENT**

**D29. CEMENT TICKETS**

D29.1 The Contractor shall submit blended cement weigh tickets to the Contract Administrator on a weekly basis for production and cost tracking.

**D30. PAYMENT**

D30.1 Further to C12, the City shall make payments to the Contractor by direct deposit to the Contractor's banking institution, and by no other means. Payments will not be made until the Contractor has made satisfactory direct deposit arrangements with the City. Direct deposit application forms are at [https://winnipeg.ca/finance/files/Direct\\_Deposit\\_Form.pdf](https://winnipeg.ca/finance/files/Direct_Deposit_Form.pdf).

**D31. PAYMENT SCHEDULE**

D31.1 Further to C12, payment shall be in accordance with the following payment schedule:

- (a) After ten (10) consecutive Working Days;
- (b) After twenty (20) consecutive Working Days;
- (c) After Total Performance is achieved.

**WARRANTY**

**D32. WARRANTY**

D32.1 Notwithstanding C13.2, the warranty period shall begin on the date of Substantial Performance and shall expire one (1) year thereafter unless extended pursuant to C13.2.1 or C13.2.2, in which case it shall expire when provided for thereunder.

**DISPUTE RESOLUTION**

**D33. DISPUTE RESOLUTION**

D33.1 If the Contractor disagrees with any opinion, determination, or decision of the Contract Administrator, the Contractor shall act in accordance with the Contract Administrator's opinion,



determination, or decision unless and until same is modified by the process followed by the parties pursuant to D33.

D33.2 The entire text of C21.4 is deleted, and amended to read: "Intentionally Deleted"

D33.3 The entire text of C21.5 is deleted, and amended to read:

(a) If Legal Services has determined that the Disputed Matter may proceed in the Appeal Process, the Contractor must, within ten (10) Business Days of the date of the Legal Services Response Letter, submit their written Appeal Form, in the manner and format set out on the City's Purchasing Website, to the Chief Administrative Officer, and to the Contract Administrator. The Contractor may not raise any other disputes other than the Disputed Matter in their Appeal Form.

D33.4 Further to C21, prior to the Contract Administrator's issuance of a Final Determination, the following informal dispute resolution process shall be followed where the Contractor disagrees with any opinion, determination, or decision of the Contract Administrator ("Dispute"):

- (a) In the event of a Dispute, attempts shall be made by the Contract Administrator and the Contractor's equivalent representative to resolve Disputes within the normal course of project dealings between the Contract Administrator and the Contractor's equivalent representative.
- (b) Disputes which in the reasonable opinion of the Contract Administrator or the Contractor's equivalent representative cannot be resolved within the normal course of project dealings as described above shall be referred to a without prejudice escalating negotiation process consisting of, at a minimum, the position levels as shown below and the equivalent Contractor representative levels:
- (i) The Contract Administrator;
  - (ii) Supervisory level between the Contract Administrator and applicable Department Head;
  - (iii) Department Head.

D33.4.1 Names and positions of Contractor representatives equivalent to the above City position levels shall be determined by the Contractor and communicated to the City at the pre-commencement or kick off meeting.

D33.4.2 As these negotiations are not an adjudicative hearing, neither party may have legal counsel present during the negotiations.

D33.4.3 Both the City and the Contractor agree to make all reasonable efforts to conduct the above escalating negotiation process within twenty (20) Business Days, unless both parties agree, in writing, to extend that period of time.

D33.4.4 If the Dispute is not resolved to the City and Contractor's mutual satisfaction after discussions have occurred at the final escalated level as described above, or the time period set out in D33.4.3, as extended if applicable, has elapsed, the Contract Administrator will issue a Final Determination as defined in C1.1(v), at which point the parties will be governed by the Dispute Resolution process set out in C21.

## **INDEMNITY**

### **D34. INDEMNITY**

D34.1 Indemnity shall be as stated in C17.

D34.2 Notwithstanding C17.1, the Contractor shall save harmless and indemnify the City in the amount of twice the Contract Price or five million dollars (\$5,000,000), whichever is greater, against all costs, damages or expenses arising from actions, claims, demands and proceedings, by whomsoever brought, made or taken as a result of negligent acts or negligent omissions of the Contractor, their Subcontractors, employees or agents in the performance or purported performance of the Work, and more particularly from:

- (a) accidental injury to or death of any person whether retained by or in the employ of the contractor or not, arising directly or indirectly by reason of the performance of the Work, or by reason of any trespass on or damage to property;
- (b) damage to any property owned in whole or in part by the City, or which the City by duty or custom is obliged, directly or indirectly, in any way or to any degree, to construct, repair or maintain;
- (c) damage to, or trespass or encroachment upon, property owned by persons other than the City;
- (d) any claim for lien or trust claim served upon the City pursuant to The Builders' Liens Act;
- (e) failure to pay a Workers Compensation assessment, or Federal or Provincial taxes;
- (f) unauthorized use of any design, device, material or process covered by letters patent, copyright, trademark or trade name in connection with the Work;
- (g) inaccuracies in any information provided to the City by the Contractor.

D34.3 Further to C17, The City shall save harmless and indemnify the Contractor in the amount of twice the Contract Price or five million dollars (\$5,000,000), whichever is greater, against all costs, damages or expenses arising from actions, claims, demands and proceedings, by whomsoever brought, made or taken as a result of negligent acts or negligent omissions of the City, their employees or agents in the performance of its obligation under the Contract.

### THIRD PARTY AGREEMENTS

#### D35. FUNDING AND/OR CONTRIBUTION AGREEMENT OBLIGATIONS

- D35.1 In the event that funding for the Work of the Contract is provided to the City of Winnipeg by the Government of Manitoba and/or the Government of Canada, the following terms and conditions shall apply, as required by the applicable funding agreements.
- D35.2 Further to D35.1, in the event that the obligations in D35 apply, actual costs legitimately incurred by the Contractor as a direct result of these obligations ("Funding Costs") shall be determined by the actual cost to the Contractor and not by the valuation method(s) outlined in C7.4. In all other respects Funding Costs will be processed in accordance with Changes in Work under C7.
- D35.3 For the purposes of D35:
- (a) **"Government of Canada"** includes the authorized officials, auditors, and representatives of the Government of Canada; and
  - (b) **"Government of Manitoba"** includes the authorized officials, auditors, and representatives of the Government of Manitoba.
- D35.4 Modified Insurance Requirements
- D35.4.1 If not already required under the insurance requirements identified in D12, the Contractor will be required to provide wrap-up liability insurance in an amount of no less than two million dollars (\$2,000,000) inclusive per occurrence. Such policy will be written in the joint names of the City, Contractor, Consultants and all sub-contractors and sub-consultants and include twelve (12) months completed operations. The Government of Manitoba and their Ministers, officers, employees, and agents shall be added as additional insureds.
- D35.4.2 If not already required under the insurance requirements identified in D12, the Contractor will be required to provide builders' risk insurance (including boiler and machinery insurance, as applicable) providing all risks coverage at full replacement cost, or such lower level of insurance that the City may identify on a case-by-case basis, such as an installation floater.
- D35.4.3 The Contractor shall obtain and maintain third party liability insurance with minimum coverage of two million dollars (\$2,000,000.00) per occurrence on all licensed vehicles

operated at the Site. In the event that this requirement conflicts with another licensed vehicle insurance requirement in this Contract, then the requirement that provides the higher level of insurance shall apply.

D35.4.4 Further to D12.4, insurers shall provide satisfactory Certificates of Insurance to the Government of Manitoba prior to commencement of Work as written evidence of the insurance required. The Certificates of Insurance must provide for a minimum of thirty (30) days' prior written notice to the Government of Manitoba in case of insurance cancellation.

D35.4.5 All policies must be taken out with insurers licensed to carry on business in the Province of Manitoba.

#### D35.5 Indemnification By Contractor

D35.5.1 In addition to the indemnity obligations outlined in C17 of the General Conditions for Construction, the Contractor agrees to indemnify and save harmless the Government of Canada and the Government of Manitoba and each of their respective Ministers, officers, servants, employees, and agents from and against all claims and demands, losses, costs, damages, actions, suit or other proceedings brought or pursued in any manner in respect of any matter caused by the Contractor or arising from this Contract or the Work, or from the goods or services provided or required to be provided by the Contractor, except those resulting from the negligence of any of the Government of Canada's or the Government of Manitoba's Ministers, officers, servants, employees, or agents, as the case may be.

D35.5.2 The Contractor agrees that in no event will Canada or Manitoba, their respective officers, servants, employees or agents be held liable for any damages in contract, tort (including negligence) or otherwise, for:

- (a) any injury to any person, including, but not limited to, death, economic loss or infringement of rights;
- (b) any damage to or loss or destruction of property of any person; or
- (c) any obligation of any person, including, but not limited to, any obligation arising from a loan, capital lease or other long term obligation;

in relation to this Contract or the Work.

#### D35.6 Records Retention and Audits

D35.6.1 The Contractor shall maintain and preserve accurate and complete records in respect of this Contract and the Work, including all accounting records, financial documents, copies of contracts with other parties and other records relating to this Contract and the Work during the term of the Contract and for at least six (6) years after Total Performance. Those records bearing original signatures or professional seals or stamps must be preserved in paper form; other records may be retained in electronic form.

D35.6.2 In addition to the record keeping and inspection obligations outlined in C6 of the General Conditions for Construction, the Contractor shall keep available for inspection and audit at all reasonable times while this Contract is in effect and until at least six (6) years after Total Performance, all records, documents, and contracts referred to in D35.6.1 for inspection, copying and audit by the City of Winnipeg, the Government of Manitoba and/or the Government of Canada and their respective representatives and auditors, and to produce them on demand; to provide reasonable facilities for such inspections, copying and audits, to provide copies of and extracts from such records, documents, or contracts upon request by the City of Winnipeg, the Government of Manitoba, and/or the Government of Canada and their respective representatives and auditors, and to promptly provide such other information and explanations as may be reasonably requested by the City of Winnipeg, the Government of Manitoba, and/or the Government of Canada from time-to-time.

#### D35.7 Other Obligations

- D35.7.1 The Contractor consents to the City providing a copy of the Contract Documents to the Government of Manitoba and/or the Government of Canada upon request from either entity.
- D35.7.2 If the Lobbyists Registration Act (Manitoba) applies to the Contractor, the Contractor represents and warrants that it has filed a return and is registered and in full compliance with the obligations of that Act, and covenants that it will continue to comply for the duration of this Contract.
- D35.7.3 The Contractor shall comply with all applicable legislation and standards, whether federal, provincial, or municipal, including (without limitation) labour, environmental, and human rights laws, in the course of providing the Work.
- D35.7.4 The Contractor shall properly account for the Work provided under this Contract and payment received in this respect, prepared in accordance with generally accepted accounting principles in effect in Canada, including those principles and standards approved or recommended from time-to-time by the Chartered Professional Accountants of Canada or the Public Sector Accounting Board, as applicable, applied on a consistent basis.
- D35.7.5 The Contractor represents and warrants that no current or former public servant or public office holder, to whom the Value and Ethics Code for the Public Sector, the Policy on Conflict of Interest and Post Employment, or the Conflict of Interest Act applies, shall derive direct benefit from this Contract, including any employment, payments, or gifts, unless the provision or receipt of such benefits is in compliance with such codes and the legislation.
- D35.7.6 The Contractor represents and warrants that no member of the House of Commons or of the Senate of Canada or of the Legislative Assembly of Manitoba is a shareholder, director or officer of the Contractor or of a Subcontractor, and that no such member is entitled to any benefits arising from this Contract or from a contract with the Contractor or a Subcontractor concerning the Work.



**FORM K: EQUIPMENT**  
(See D15)

**CEMENT STABILIZATION OF GRAVEL SURFACE BACK LANES**

<p><b>1. Category/type:</b></p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p>
<p><b>2. Category/type:</b></p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p>
<p><b>3. Category/type:</b></p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p>

**FORM K: EQUIPMENT**  
(See D15)

**CEMENT STABILIZATION OF GRAVEL SURFACE BACK LANES**

<p><b>4. Category/type:</b></p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p>
<p><b>5. Category/type:</b></p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p>
<p><b>6. Category/type:</b></p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p> <p>Make/Model/Year: _____ Serial No.: _____</p> <p>Registered owner: _____</p>

## PART E - SPECIFICATIONS

### GENERAL

#### E1. APPLICABLE SPECIFICATIONS AND DRAWINGS

- E1.1 These Specifications shall apply to the Work.
- E1.2 *The City of Winnipeg Standard Construction Specifications* in their entirety, whether or not specifically listed on Form B: Prices, shall apply to the Work.
- E1.2.1 *The City of Winnipeg Standard Construction Specifications* is available on the Information Connection page at The City of Winnipeg, Corporate Finance, Purchasing Division website at <http://www.winnipeg.ca/matmgt/Spec/Default.stm>
- E1.2.2 The version in effect three (3) Business Days before the Submission Deadline shall apply.
- E1.2.3 Further to C2.4(d), Specifications included in the Tender shall govern over *The City of Winnipeg Standard Construction Specifications*.
- E1.3 Bidders are reminded that requests for approval of substitutes as an approved equal or an approved alternative shall be made in accordance with B6. In every instance where a brand name or design specification is used, the City will also consider approved equals and/or approved alternatives in accordance with B6.
- E1.4 The following are applicable to the Work:

<u>Drawing No.</u>	<u>Drawing Name/Title</u>	<u>Drawing (Original) Sheet Size</u>
	Cover Sheet	A1
CS1	Location 01 – Sta. 0+00 to Sta. 1+10	A1
CS2	Location 01 – Sta. 1+10 to Sta. 2+20	A1
CS3	Location 02 – Sta. 0+00 to Sta. 1+00	A1
CS4	Location 02 – Sta. 1+00 to Sta. 1+96	A1
CS5	Location 03 – Sta. 0+00 to Sta. 1+20	A1
CS6	Location 03 – Sta. 0+00 to Sta. 1+30	A1
CS7	Location 03 – Sta. 1+30 to Sta. 2+50	A1
CS8	Location 03 – Sta. 2+50 to Sta. 3+73	A1
CS9	Location 04 – Sta. 0+00 to Sta. 0+88	A1
CS10	Location 04 – Sta. 0+00 to Sta. 1+30	A1
CS11	Location 04 – Sta. 1+30 to Sta. 2+58	A1
CS12	Location 05 – Sta. 0+00 to Sta. 0+80	A1
CS13	Location 05 – Sta. 0+80 to Sta. 1+80	A1
CS14	Location 05 – Sta. 1+80 to Sta. 2+81	A1
CS15	Location 06 – Sta. 0+00 to Sta. 1+40	A1
CS16	Location 06 – Sta. 1+40 to Sta. 2+70	A1
CS17	Location 06 – Sta. 2+70 to Sta. 4+10	A1
CS18	Location 07 – Sta. 0+00 to Sta. 0+90	A1
CS19	Location 07 – Sta. 0+90 to Sta. 1+74	A1
CS20	Location 08 – Sta. 0+00 to Sta. 1+10	A1
CS21	Location 08 – Sta. 1+10 to Sta. 2+14	A1
CS22	Location 09 – Sta. 0+00 to Sta. 0+60	A1
CS23	Location 09 – Sta. 0+00 to Sta. 1+10	A1
CS24	Location 09 – Sta. 1+10 to Sta. 2+10	A1



## **E2. MOBILIZATION AND DEMOBILIZATION PAYMENT**

### DESCRIPTION

- E2.1 This Specification shall cover all operations relating to the mobilization and demobilization of the Contractor to the project location(s).
- E2.2 The Work to be done by the Contractor under this Specification shall include the furnishing of all superintendence, overhead, labour, materials, equipment, tools, supplies, and all things necessary for and incidental to the satisfactory performance and completion of all Works as hereinafter specified.
- E2.3 The inclusion of a payment item for the Work under this Specification shall not release or reduce the responsibilities of the Contractor under any other specification in this Contract.

### SCOPE OF WORK

- E2.4 Further to C12 of the General Conditions, where Mobilization and Demobilization is included as a bid item, it shall consist of the following, as applicable:
- (a) Mobilization shall include, but not be limited to:
    - (i) All activities and associated costs for transportation of the Contractor's personnel, equipment, and operating supplies to the site, and/or sites, and/or between sites;
    - (ii) Establishment of offices, buildings, other necessary general facilities and equipment parking/staging areas for the Contractor's operations at the site or sites;
    - (iii) Premiums paid for performance and payment bonds including coinsurance and reinsurance agreements as applicable;
    - (iv) General cleanup and housekeeping needed maintain a neat and orderly project site(s);
    - (v) Other job related items.
  - (b) Demobilization shall include, but not be limited to:
    - (i) All activities and costs for transportation of personnel, equipment, and supplies not used in the project from the site, and/or sites, and/or between sites;
    - (ii) Disassembly, removal, and site cleanup and restoration of offices, buildings, and other facilities assembled on the site and/or sites;
    - (iii) Repair of access roads, temporary haul roads, and equipment parking areas leaving the project site in the same or better condition than at the start of the project;
    - (iv) General cleanup and housekeeping needed to restore a neat and orderly project site.
- E2.5 Access to the site, equipment parking, and staging areas are limited to that shown on the drawings or as approved by the Contract Administrator.

### MEASUREMENT AND PAYMENT

- E2.6 The lump-sum price for the Mobilization and Demobilization bid item shall not exceed five percent (5.00%) of the total bid price for the Contract.
- E2.6.1 Further to B9, B17, C12 and E2.6, should the lump sum price exceed 5% of the Total Bid Price the lump sum price will be reduced to 5% of the Total Bid Price, the Total Bid Price will be determined using the reduced lump sum price and payment will be based on the reduced lump sum price.
- E2.7 Payment for Mobilization:
- (a) 60% of the lump-sum price will be paid to the contractor for Mobilization on the first Progress Estimate for the Contract.
- E2.8 Payment for Demobilization:

- (a) The remaining 40% of the lump-sum price will be paid upon:
  - (i) Restoration of the site and/or sites to the satisfaction of the Contract Administrator;
  - (ii) Distribution of the Declaration of Total Performance.

**E2.9 Pay Reduction for Accessibility Plan**

- (a) The Demobilization payment will be reduced by the number of pay adjustments incurred in accordance with D16 and as determined by the Contract Administrator.

**E2.10** Mobilization and Demobilization will be paid only once (to a maximum of 100%), regardless of the number of times the Contractor mobilizes to the site and/or sites.

**E3. PROTECTION OF EXISTING TREES**

**E3.1** The Contractor shall take the following precautionary steps to prevent damage from construction activities to existing boulevard trees within the limits of the construction area:

- (a) The Contractor shall not stockpile materials and soil or park vehicles and equipment on boulevards within 2 metres of trees.
- (b) Trees identified to be at risk by the Contract Administrator are to be strapped with 25 x 100 x 2400mm wood planks, or suitably protected as approved by the Contract Administrator.
- (c) Excavation shall be performed in a manner that minimizes damage to the existing root systems. Where possible, excavation shall be carried out such that the edge of the excavation shall be a minimum of 1.5 times the diameter (measured in inches), with the outcome read in feet, from the closest edge of the trunk. Where roots must be cut to facilitate excavation, they shall be pruned neatly at the face of excavation.
- (d) Operation of equipment within the dripline of the trees shall be kept to the minimum required to perform the work required. Equipment shall not be parked, repaired, refuelled; construction materials shall not be stored, and earth materials shall not be stockpiled within the driplines of trees. The dripline of a tree shall be considered to be the ground surface directly beneath the tips of its outermost branches. The Contractor shall ensure that the operations do not cause flooding or sediment deposition on areas where trees are located.
- (e) Work on-site shall be carried out in such a manner so as to minimize damage to existing tree branches. Where damage to branches does occur, they shall be neatly pruned.

**E3.2** All damage to existing trees caused by the Contractor's activities shall be repaired to the requirements and satisfaction of the Contract Administrator and the City Forester or their designate.

**E3.3** No separate measurement or payment will be made for the protection of trees.

**E3.4** Except as required in E3.1(c) and E3.1(e), Elm trees shall not be pruned at any time between April 1 and July 31.

**E4. TRAFFIC CONTROL**

**E4.1** Further to 3.6, 3.7 and 3.8 of CW 1130:

- (a) Where directed by the Contract Administrator, the Contractor shall construct and maintain temporary asphalt ramps to alleviate vertical pavement obstructions such as manholes and planing drop-offs to the satisfaction of the Contract Administrator. Payment shall be in accordance with CW3410.
- (b) In accordance with the Manual of Temporary Traffic Control on City Streets (MTTC), the Contractor ("Construction Agency" in the Manual) shall be responsible for placing, maintaining and removing the appropriate temporary traffic control devices as specified by the MTTC, the Contract Drawings, Staging Plans and Traffic Management Plans or by the Traffic Management Branch of the City of Winnipeg Public Works Department. The Contractor shall bear all costs associated with the placement of temporary traffic control devices by their own forces or Subcontractor.

- (c) In addition, the Contractor shall be responsible for **supplying**, removing, placing and maintaining all regulatory signing including but not limited to:
  - (i) Parking restrictions;
  - (ii) Stopping restrictions;
  - (iii) Turn restrictions;
  - (iv) Diamond lane removal;
  - (v) Full or directional closures on a Regional Street;
  - (vi) Traffic routed across a median;
  - (vii) Full or directional closure of a non-regional street where there is a requirement for regulatory signs (turn restrictions, bus stop relocations, etc.) to implement the closure.
- (d) The Contractor shall remove and stockpile any regulatory signage not required during construction such as, but not limited to, parking restrictions, turn restrictions and loading restrictions.

E4.2 Upon request from the Contract Administrator, the Contractor shall provide records demonstrating that the site has been maintained.

E4.3 Further to E4.1(c) and E4.1(d) the Contractor shall make arrangements with the Traffic Services Branch of the City of Winnipeg to reinstall the permanent regulatory signs after the Contract Work is complete. The Contractor shall make arrangements to drop off the stockpiled materials to Traffic Services at 495 Archibald Street.

E4.4 Any changes to the approved Traffic Management Plan must be submitted to the Contract Administrator a minimum of five (5) Working Days prior to the required change for approval.

E4.5 If the Contract Administrator determines that the Contractor is not performing Traffic Control in accordance with this specification, Traffic Services may be engaged to perform the Traffic Control. In this event the Contractor shall bear costs charged to the project by the Traffic Services Branch of the City of Winnipeg in connection with the required Works.

## **E5. TRAFFIC MANAGEMENT**

E5.1 Further to 3.7 of CW 1130:

E5.1.1 The Contractor shall schedule construction activities to meet the following:

- (a) On Residential streets at least one lane for local access traffic shall be maintained along this street during construction. At least one intersection on adjacent bays shall be open at a time.
- (b) On Residential streets local access and/or bus traffic shall be maintained when possible as determined by the Contract Administrator. The road shall be closed to traffic only with the approval of the Contract Administrator.

E5.1.2 Should the Contractor be unable to maintain an existing access to a residence or business, they shall review the planned disruption with the business or residence and the Contract Administrator, and take reasonable measures to minimize the impact. The Contractor shall provide a minimum of 24 hours notification to the affected residence or business and the Contract Administrator, prior to disruption of access.

E5.1.3 Pedestrian and ambulance/emergency vehicle access must be maintained at all times.

## **E6. REFUSE AND RECYCLING COLLECTION**

E6.1 While access to refuse and/or recycling collection vehicles is restricted, on collection day(s) the Contractor shall move all of the affected property owners refuse and/or recycling materials to a nearby common area, prior to an established time, and location to permit the normal collection

vehicles to collect the materials. Immediately following recycling collection, the Contractor shall return recycling receptacles to the addresses marked on the receptacles.

E6.2 The Contractor shall be responsible for determining the collection schedule for all streets identified in D2.

E6.3 No measurement or payment will be made for the work associated with this specification.

## **E7. WATER OBTAINED FROM THE CITY**

E7.1 Further to 3.7 of CW 1120, the Contractor shall pay for all costs, including sewer charges, associated with obtaining water from the City in accordance with the Waterworks and Sewer By-laws.

## **E8. SURFACE RESTORATIONS**

E8.1 Further to 3.3 of CW 1130, when Total Performance is not achieved in the year the Contract is commenced, the Contractor shall temporarily repair any Work commenced and not completed to the satisfaction of the Contract Administrator. The Contractor shall maintain the temporary repairs in a safe condition as determined by the Contract Administrator until permanent repairs are completed. The Contractor shall bear all costs associated with temporary repairs and their maintenance.

## **E9. CEMENT STABILIZATION OF GRAVEL SURFACE BACKLANES**

### **DESCRIPTION**

E9.1 General

E9.1.1 This specification covers the cement stabilization of gravel back lanes surfaces identified in D2.1.

E9.1.2 Referenced Standard Construction Specifications

(a) CW 1110 – General Instructions.

(b) CW 1120 – Existing Services, Utilities and Structures.

(c) CW 1130 – Site Requirements.

### **MATERIAL**

E9.2 Portland cement shall be Type GU General Use Hydraulic conforming to the requirements of CSA A3001. Cement shall be kept in weather tight storage that will protect it from moisture and contamination, and in such a manner as to permit inspection, sampling and identification, where required.

E9.2.1 Check tests of the cement may be undertaken by a Testing Laboratory designated by the City of Winnipeg, Contract Administrator. Any cement which fails to comply with the requirements of CSA A3001 will be rejected, notwithstanding any certificate of acceptance that may have previously been given. Cement that has been rejected must be removed immediately by the Concrete Supplier.

E9.3 Duraflex is a proprietary cementitious additive that is blended with Portland cement. The additive shall account for 2% of the total cementitious material required for soil stabilization.

E9.4 Water used for mixing shall be clean and free of oil, salt, acid, alkali, sugar, vegetable matter or other substances injurious to the finished product.

E9.4.1 Water sources other than the local municipal domestic water supply must be approved by the Contract Administrator.

## MIX DESIGN

- E9.5 The Contractor shall provide the Contract Administrator with a mix design statement certifying the constituent materials and mix proportions that will be used in the soil cement stabilization. The Contractor shall also supply reasonable evidence to the Contract Administrator that the mix proportions selected will produce an acceptable stabilized gravel surface. The mix design shall state:
- (a) The natural moisture content and classification of the soil sampled. The soil shall be classified using ASTM D2487 standard;
  - (b) Atterberg Limits at 0%, 4%, 6% and 8% cement by weight of soil;
  - (c) The optimum moisture content and maximum dry density of soil at 4%, 6% and 8% cement by weight of soil;
  - (d) Duraflex shall account for 2% of total cementitious content;
  - (e) Portland cement shall account for 98% of total cementitious content; and
  - (f) Determine the unconfined compressive strength at 3, 7 and 28 days for each type/class of soil at cement contents of 4%, 6% and 8% of cement by weight of soil:
    - (i) Minimum compressive strength of 4.0 MPa @ 7 days.
- E9.6 The Contractor shall provide the Contract Administrator with the results of the mix design as per critical stage date in D21.1(a). For each project and alternate location, a mix design must be provided.

## DAYLIGHTING UTILITIES

- E9.7 The Contractor shall be responsible to submit and attain underground clearances for utilities through Click Before You Dig Manitoba for safe excavation.
- E9.8 All project and alternate locations that have utilities present shall require daylighting using approved methods issued by utility owners to determine the exact locations and depths.

## CONSTRUCTION METHOD

- E9.9 The Contractor shall grade the gravel surface to the provided design profile for each project location to a flat and smooth surface.
- E9.9.1 If the design of the profile requires that additional gravel be placed along the back lane, the City will supply and deliver the material.
- E9.9.2 Cost of the material and delivery will be at the expense of the City.
- E9.9.3 The Contractor is responsible to provide equipment to grade the gravel surface.
- E9.10 The Contractor shall rotomill the top 300mm of gravel surface such that pulverized soil passes 100 percent on a 25mm sieve and 60 percent on a 5mm sieve.
- E9.11 The Contractor shall rotomill the full width of the back lane as determined by the Contract Administrator.
- E9.12 The Contractor shall acquire and blend Duraflex and Portland cement using two bulk tanks that feed to a blend scale tank that incorporates an aeration blending process. The mixing plant shall be approved by the Contract Administrator.
- E9.12.1 Blending of Duraflex and Portland cement shall be incidental to the bid items for "Supply of Blended Cement" on Form B:Prices.
- E9.13 The Contractor shall apply blended cement uniformly on the pulverized soil such that all the soil receives the minimum percentage of cement by use of a bulk cement drop spreader.
- E9.13.1 The bulk cement drop spreader must be able to apply blended cement to within 1% of the targeted loading weight.

- E9.14 The Contractor shall rotomill the applied blended cement to the pulverized soil and make moisture adjustments to meet the soil's optimum moisture content plus additional water content required to ensure hydration of cement.
- E9.14.1 Un-pulverized soil lumps in the soil cement mixture immediately behind the mixer that are dry will not be allowed.
- E9.14.2 The rotomill shall provide a means of visibly and accurately gauging the water application. The water shall be applied uniformly through a pressure spray bar inside the rotomill head.
- E9.14.3 The rotomill shall in one continuous operation thoroughly moist-mix the soil, cement and water.
- E9.14.4 The rotomill shall spread the soil cement mixture evenly over the width of the machine and leave it in a loose condition ready for immediate compaction.
- E9.14.5 The soil and cement mixture shall not remain undisturbed, after mixing and before compacting, for more than 30 minutes.
- E9.15 The Contractor shall compact the soil cement mixture to no less than 95 percent of the Standard Maximum Density.
- E9.15.1 A sheepsfoot packer, grader and smooth drum roller shall be used to compact the surface and achieve design profiles.
- E9.15.2 When the uncompacted soil cement mixture is wetted by rain so that the average moisture content exceeds the tolerance given at the time of final compaction, the entire section shall be reconstructed in accordance with this specification at the sole expense of the Contractor.
- E9.15.3 The specified optimum moisture content and density shall be determined in the field by the Contractor and reported to the Contract Administrator.
- E9.15.4 Prior to the beginning of compaction, the mixture shall be in a loose condition full depth. The loose material shall be uniformly compacted to the specified density within 2 hours after the application of the cement.
- E9.15.5 While final grading the lane all excess windrow material from private access points shall be removed.
- E9.15.6 At the completion of stabilization process the Contractor shall run a vehicle mounted magnet to pick up any metal objects that have been brought to surface during stabilization process.
- E9.15.7 Prior to mobilizing to the next location, the Contractor shall mechanically sweep surrounding streets affected by the stabilization process to the satisfaction of the Contract Administrator.

#### MEASUREMENT AND PAYMENT

- E9.16 Cement Stabilization of Gravel Surface.
- E9.16.1 Payment will be made at the unit price bid per square meter for "Cement Stabilized Gravel Surface" on Form B: Unit Prices per project location. This payment will be full compensation for;
- (i) Mix design;
  - (ii) Submit and attain underground clearances through Click Before You Dig Manitoba for safe excavation;
  - (iii) Daylighting utilities using approved methods;
  - (iv) Removing or placing material to achieve design profile;
  - (v) Rotomilling the top 300mm of the gravel surface;
  - (vi) Acquiring and applying blended cement to the pulverized soil surface;
  - (vii) Supplying and attaining water to hydraulic cement with watering truck;

- (viii) Rotomill blended cement, water and gravel base material using rotomill equipment;
- (ix) Pack surface using sheepsfoot and dynamic packer;
- (x) Grade surface to achieve design profile;
- (xi) Perform density testing of stabilized gravel surface; and
- (xii) Sample and provide mix design and daylight utilities on alternate locations.

**E9.17 Supply of Blended Cement**

E9.17.1 Payment will be made at the unit price bid per square meter for "Supply of Blended Cement" on Form B: Unit Prices per project location. This payment will be full compensation for;

- (i) Supply of Portland cement;
- (ii) Supply of Duraflex; and
- (iii) Blending of Duraflex and Portland cement.

**E10. PRUNING OF EXISTING TREES AND SHRUBS**

DESCRIPTION

E10.1 Provide all labour, materials, methods, equipment and accessories for pruning of existing trees and shrubs within the limit of Work.

QUALITY ASSURANCE

E10.2 Pruning of trees shall be provided by a person with a Manitoba Arborists Certificate with demonstrable experience sourcing and Work.

E10.3 Contact the City of Winnipeg Forestry Branch at 204-986-2004 to arrange an on site meeting to review trees to be pruned. Meeting to include the Contract Administrator.

PRUNING METHODOLOGY

E10.4 Prune horizontal and vertical within the limits of construction to ensure construction equipment can be operated without interfering with trees to remain.

E10.5 Prune as required to remove dead, broken or damaged limbs.

E10.6 Prune back to healthy growth while maintaining balanced crown shape.

E10.7 Employ clean sharp tools.

E10.8 Make cuts smooth and flush with outer edge of branch collar near the main stem or branch.

E10.9 Cuts must be smooth and sloping to prevent accumulation of water on cut.


E10.10 Do not leave little stumps ("horns") on trunks or main branches.

E10.11 Prune according to accepted horticultural practices as outline in "The Pruning Manual", Publication No. 1505-1977 by Agriculture Canada.

MEASUREMENT AND PAYMENT

E10.12 No payment shall be made for pruning of existing trees. Pruning of existing trees shall be considered incidental to the Work.

### APPENDIX A – PROJECT LOCATIONS

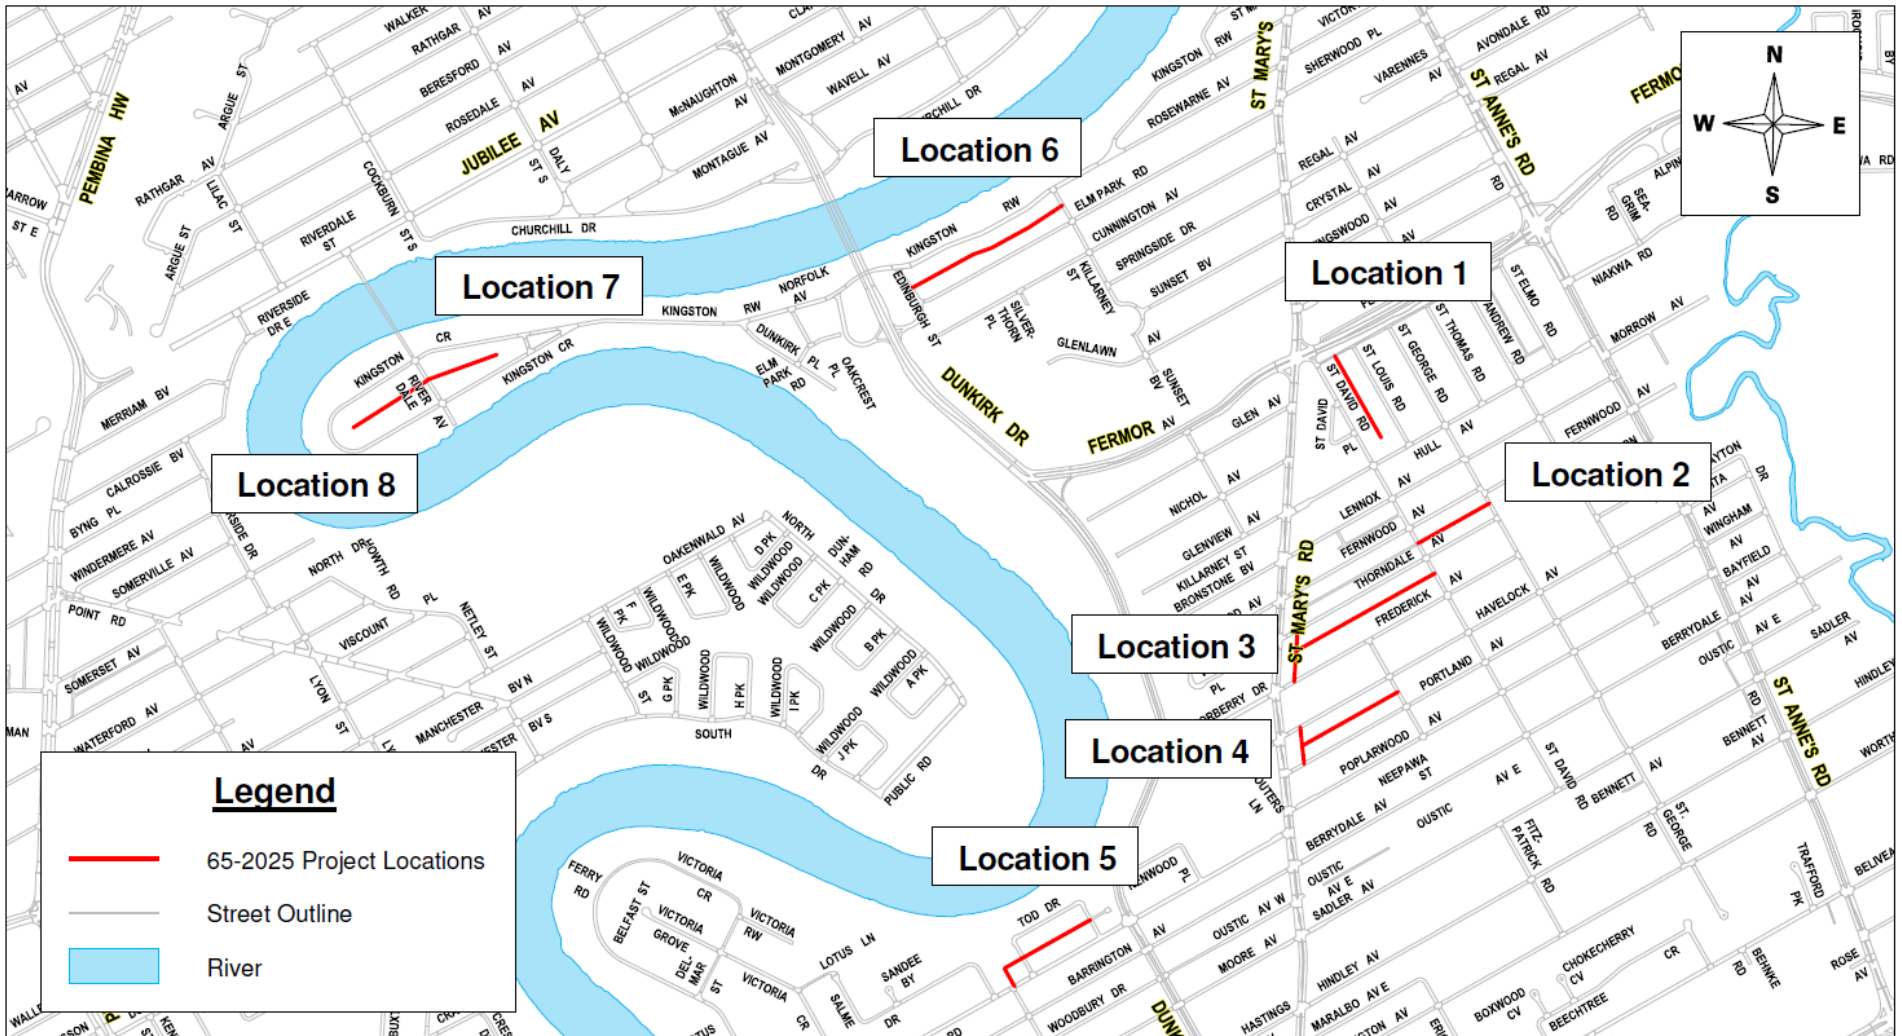

65-2025  
Cement Stabilization of Gravel Back Lanes  
Map 1 of 2



**REVISED**  
3:37 pm, Jan 16, 2025





**65-2025  
Cement Stabilization of Gravel Back Lanes  
Map 2 of 2**

### APPENDIX B – ALTERNATE LOCATIONS

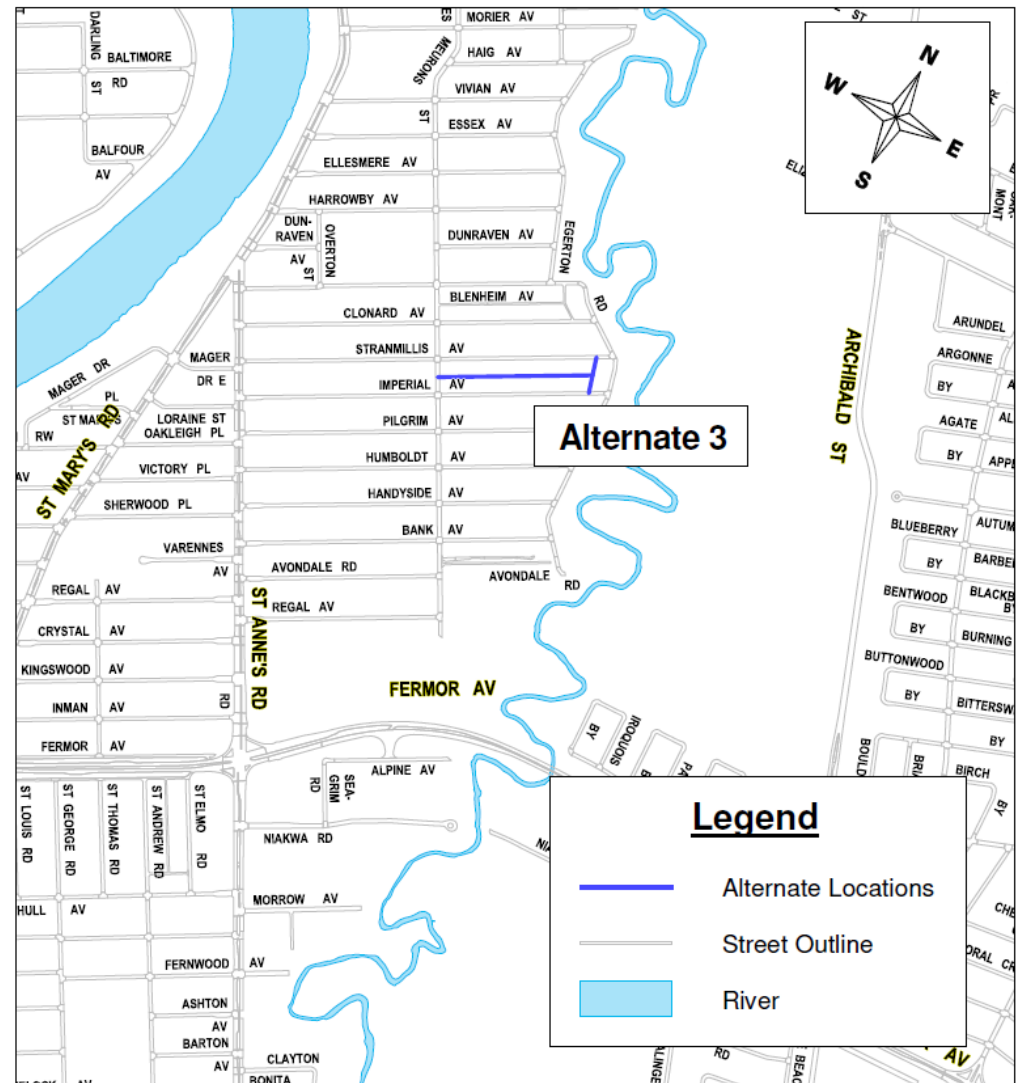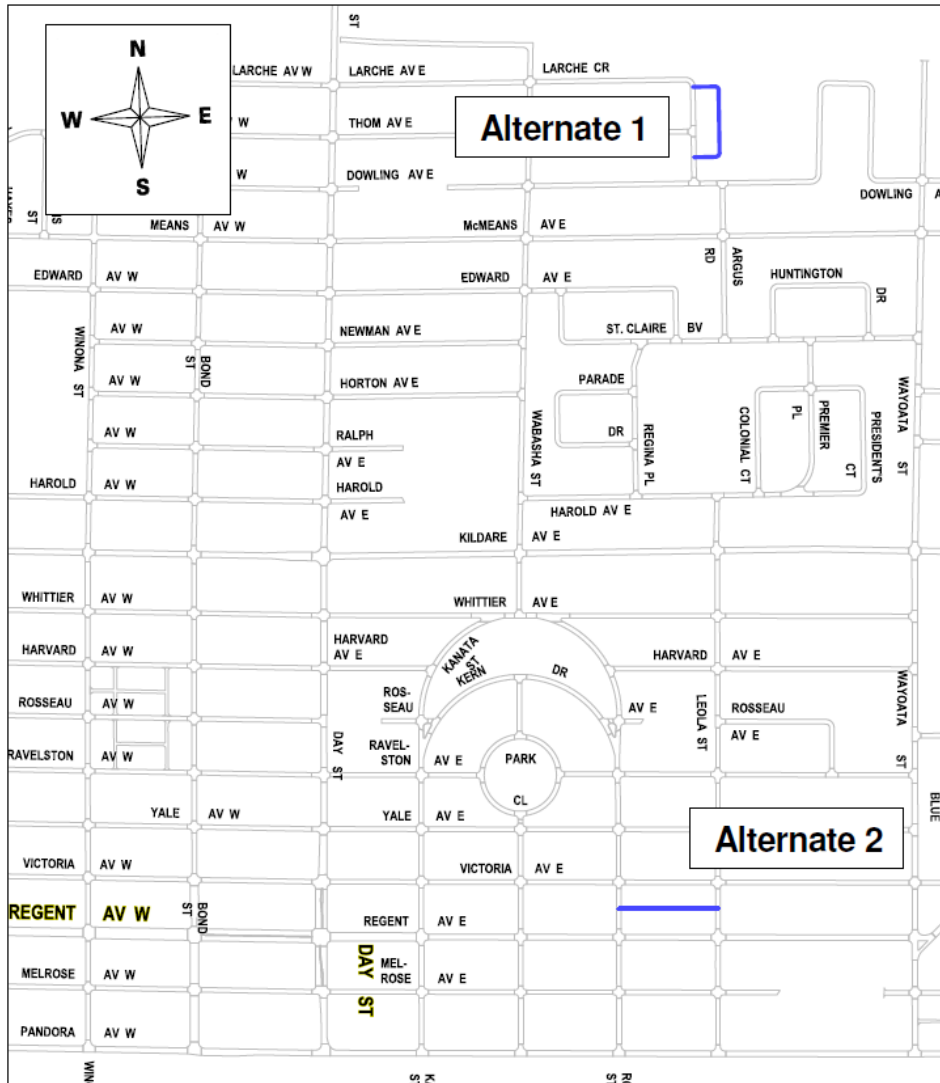

## 65-2025 Cement Stabilization of Gravel Back Lanes Alternate Locations

**REVISED**  
 11:18 am, Jan 21, 2025