



 Ø250mm PERFORATED PIPE
 (LEACHATE DRAINS CUT INTO
 EXISTING WASTE BODIES FOR
 LEACHATE DRAINAGE CONTROL)

 LEACHATE TRENCH WITH
 250mm PERFORATED
 PIPE

1. RETRO-REFLECTIVE POSTS IN ACCORDANCE WITH MANITOBA TRANSPORTATION AND INFRASTRUCTURE (MTI) POLICY STANDARDS NO 600-A-H AS APPROVED BY THE CONTRACT ADMINISTRATOR, 4 REQUIRED AROUND EACH MANHOLE AND 1 REQUIRED BY EACH CLEAN-OUT. POSTS TO BE 100mm x 100mm ORANGE POLY POST AND 4m HIGH.
2. GRANULAR BLANKET SHALL BE PLACED BY WORKING UP SLOPE FROM TOE TO MAINTAIN STABILITY AS APPROVED BY THE CONTRACT ADMINISTRATOR.
3. VOLUME BETWEEN PROPOSED GARBAGE TOP AND GRADED GROUND SURFACE TO BE CONSTRUCTED BY THE CITY OF WINNIPEG IN FUTURE, AND IS INCLUDED HERE FOR REGULATORY PURPOSES.
4. GRANULAR MATERIAL SPECIFICATIONS PROVIDED IN SECTION 31.23.23 UNDER DRAINAGE MATERIAL.

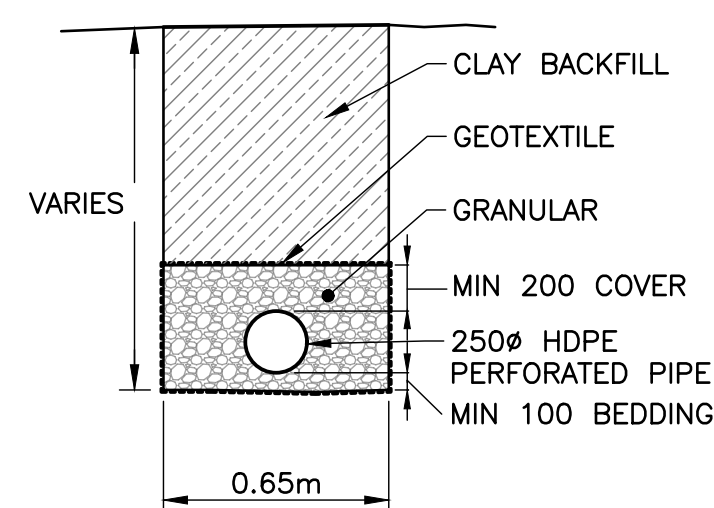

LOCATION APPROVED UNDERGROUND STRUCTURES	
SUPV. U/G STRUCTURES COMMITTEE	DATE
NOTE: LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	

B.M. ELEV.			
CONSTRUCTION COMPLETION DATE:			
1	RE-ISSUED FOR TENDER	09/15/2025	NB
0	ISSUED FOR TENDER	09/04/2025	NB
NO.	REVISIONS	DATE	BY

KGS GROUP				
DESIGNED BY		IH	CHECKED BY	NB
DRAWN BY		JP	APPROVED BY	TK
SCALE: HORIZONTAL VERTICAL		AS NOTED — RELEASED FOR CONSTRUCTION		
DATE		2025 09 15		
		DATE —		

ENGINEER'S SEAL

The seal is circular with a scalloped outer edge. Inside the circle, the text "PROFESSIONAL ENGINEER" is written along the bottom arc, and "REGISTERED" is written along the left arc. In the center, the text "N.E.P." is written above "BRUCE", which is above "Member", which is above "49253". A signature is written across the top of the seal, and the words "PROVINCE OF MANITOBA" are written along the top arc.

CONSULTANT DRAWING NUMBER

G04



THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
SOLID WASTE SERVICES

BRADY ROAD RESOURCE MANAGEMENT
FACILITY (BRRMF)
AREA D CONTINGENCY CELL
PROPOSED SITE
SECTION AND DETAILS

SHEET	04	OF	05
CITY DRAWING NUMBER			
1-0400L-C0025-001			

**ENGINEERS
GEOSCIENTISTS
MANITOBA**

Certificate of Authorization

KGS Group

No. 245

BID OPPORTUNITY:
CONTRACT NUMBER:

FILE PATH: \\kgs-file\r-data\Projects\2025\25-0107-011\Dwg\Env\
FILE NAME: 25-0107-011_G04.dwg