






CONCRETE WALL SCHEDULE					
MARK	THICKNESS	REINFORCING			REMARKS
		INTERIOR	EXTERIOR	ADDITIONAL	
CW1	400	20M @ 200 O/C E.W.	20M @ 200 O/C E.W.	20M X 1200 LG. HOOKED DOWELS @ 200 O/C TO BASE SLAB LAP WITH VERT. WALL REIN.	ROOF SLAB SEAT (SEE REF. 2)

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

800 0 800 1600 2400 3200

SCALE: 1:40mm

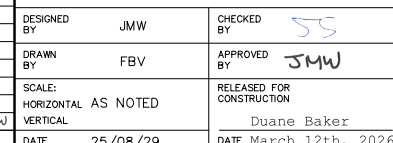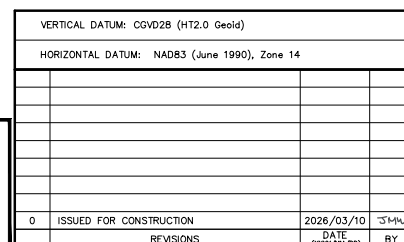

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING SERVICES DIVISION

ARMSTRONG SEWER RELIEF WORKS
CONTRACT 1
MANHOLE CHAMBER AT MAIN ST.
PLAN AND SECTIONS

SHEET **43** OF **46**
CITY DRAWING NUMBER
13687