
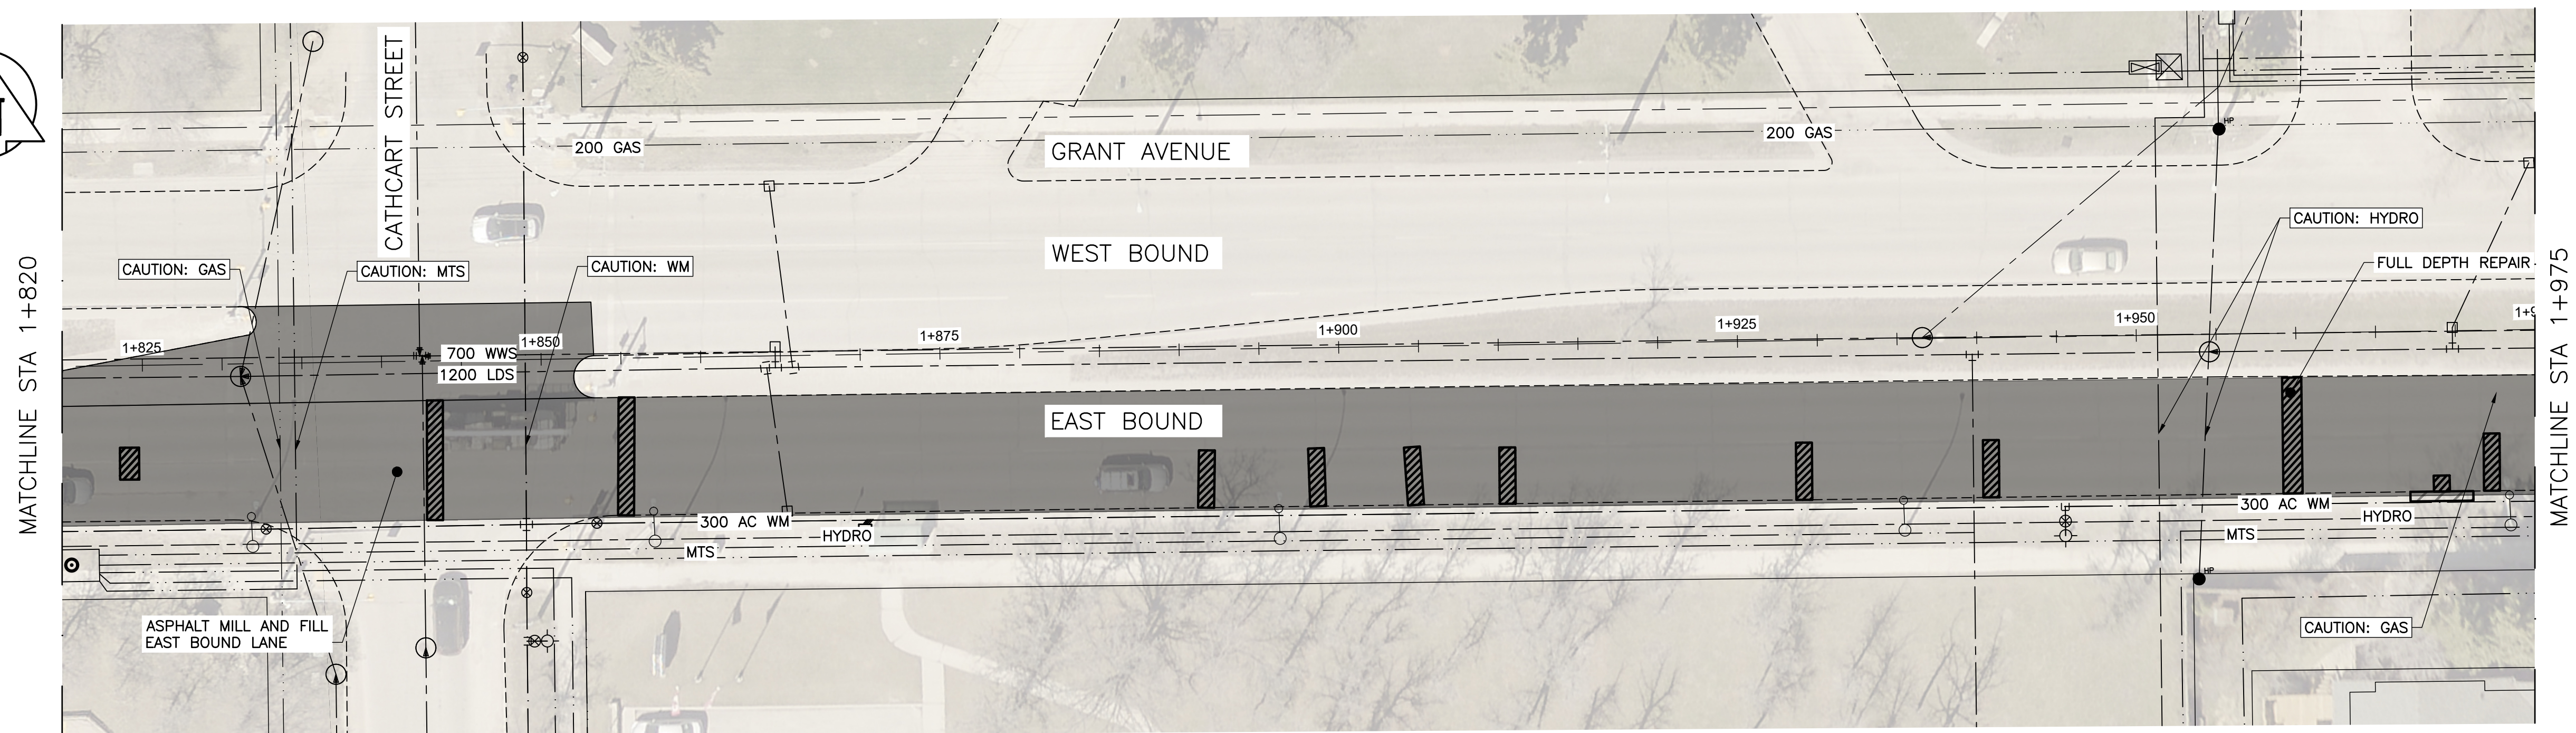
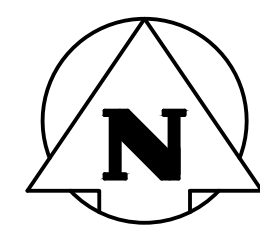


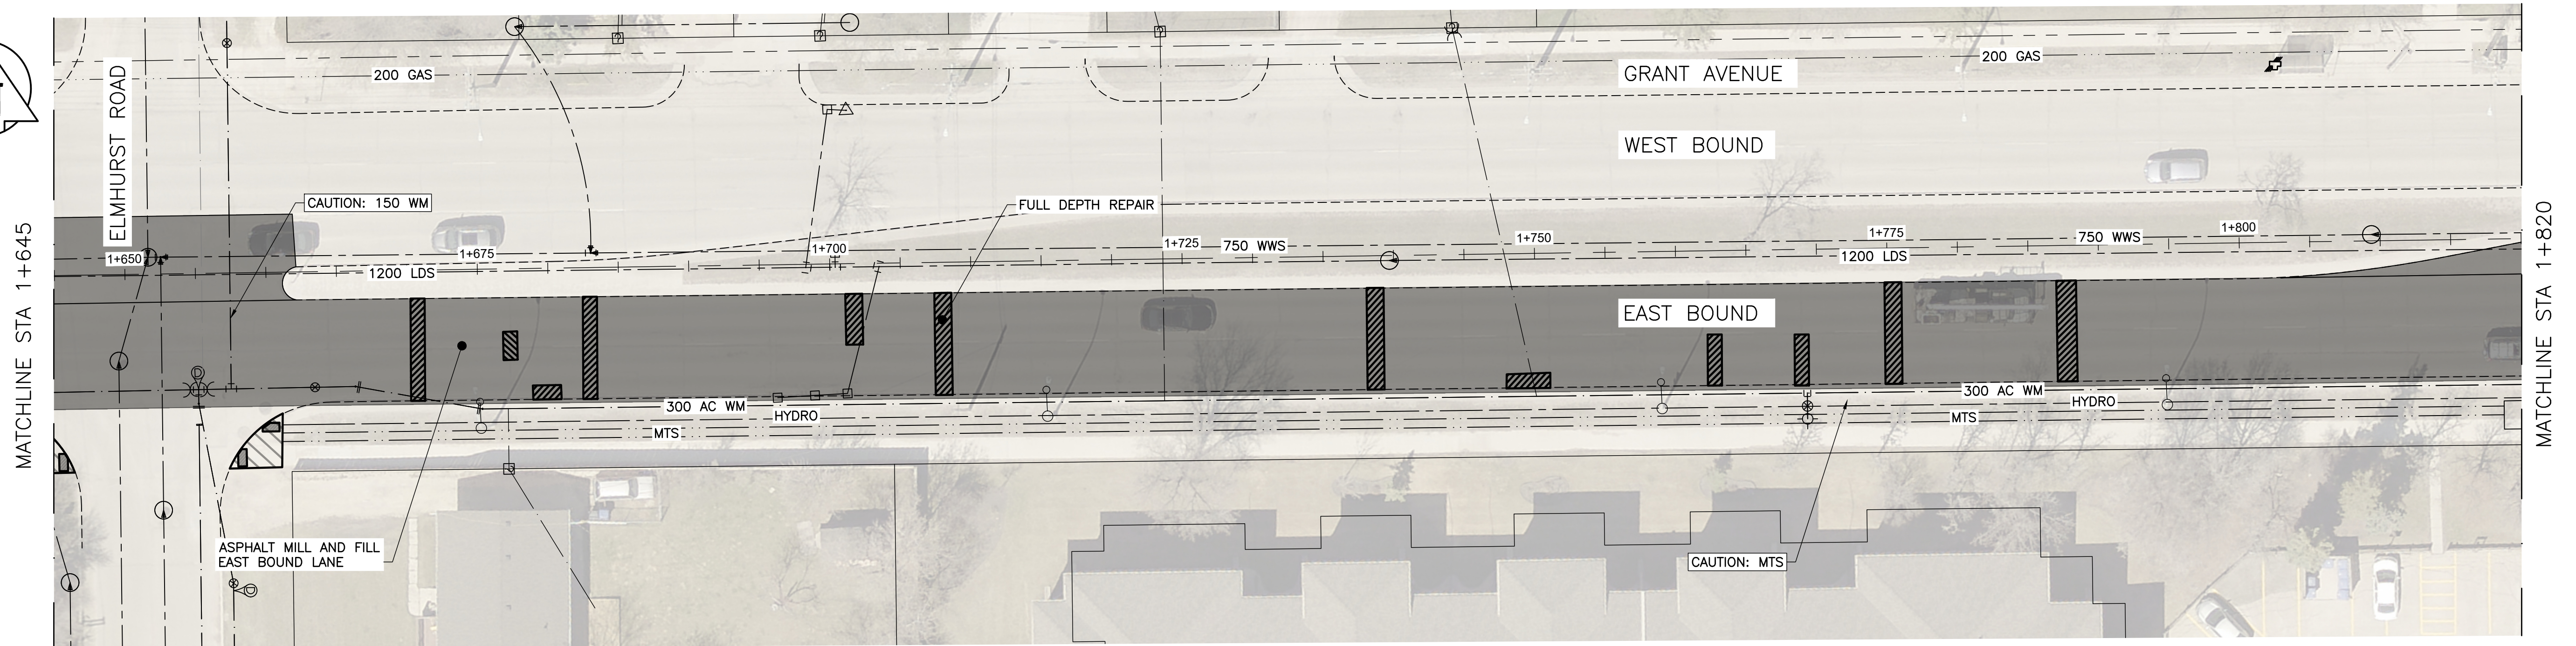

1. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH THE LATEST REVISION OF THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS.
2. CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION.
3. RENEW CURB, BULLNOSE, SPARKS AND SIDEWALKS AS DIRECTED BY THE CONTRACT ADMINISTRATOR.
4. ALL PRIVATE WALKWAYS TO BE ADJUSTED TO NEW SIDEWALK OR TOP OF CURB ELEVATION AS DIRECTED.
5. ADJUST MANHOLE FRAME CB RIMS, CURB INLETS, CURB STOPS AND VALVES TO NEW GRADES, AS DIRECTED.
6. MODIFIED BARRIER CURB TO BE CONSTRUCTED AT ALL INTERSECTION RADII AND BACK LANE RADII.
7. LIGHT STANDARDS, HYDRO POLES, AND ANCHORS THAT REQUIRE TEMPORARY SUPPORT, REMOVAL OR REPLACEMENT, TO BE DONE SO AT THE EXPENSE OF THE CONTRACTOR AS NECESSARY.
8. CONTRACTORS TO PROTECT EXISTING TREES WITHIN THE LIMITS OF CONSTRUCTION FROM DAMAGE FROM CONSTRUCTION ACTIVITIES AS OUTLINED IN THE SPECIFICATION.
9. ALL BOULEVARDS TO BE SODDED UNLESS OTHERWISE NOTED.
10. FULL AND PARTIAL DEPTH JOINT REPAIRS TO BE FINALIZED IN THE FILED PRIOR TO CONSTRUCTION. THE JOINTS IDENTIFIED ON THE DRAWING ARE FOR TENDER PURPOSES ONLY.
11. DESIGNATED CONSTRUCTION ZONE REQUIREMENTS AND GENERAL TRAFFIC CONTROL TO FOLLOW THE LATEST EDITION OF THE CITY OF WINNIPEG MANUAL FOR TEMPORARY TRAFFIC CONTROL.

DELINEATION OF PROPERTY LIMITS AS SHOWN ON THIS DWG DOES NOT REPRESENT A "LEGAL SURVEY". KGS GROUP MAKES NO REPRESENTATION OR WARRANTY AS TO THE ACCURACY OF PROPERTY LIMITS DELINEATED ON THIS DWG, NOR ON THE DIMENSIONAL ACCURACY OF DWG FEATURES RELATIVE TO THOSE PROPERTY LIMITS.

LOCATIONS OF UNDERGROUND
STRUCTURES AS SHOWN ARE BASED ON
THE BEST INFORMATION AVAILABLE. BUT
NO GUARANTEE IS GIVEN THAT ALL
EXISTING UTILITIES ARE SHOWN OR THAT
THE GIVEN LOCATIONS ARE EXACT.
CONFIRMATION OF THE EXISTENCE AND
EXACT LOCATION OF ALL SERVICES MUST
BE OBTAINED FROM INDIVIDUAL UTILITIES
BEFORE PROCEEDING WITH
CONSTRUCTION.

NOTIFY THE GAS COMPANY OF THE
PROPOSED LOCATION OF EXCAVATION.

TAKE PRECAUTION TO AVOID DAMAGE TO
GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR
DETAILS.

WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

300 LDS	LAND DRAINAGE SEWER	300 LDS	1"	POLES	1-MIS H-HYDRO
250 WWS	WASTE WATER SEWER	250 WWS		LIGHT STANDARD	
---	GAS	---	---	BACK OF CURB	---
---	HYDRO	---	---	ASPHALT RENEWAL	---
---	M.T.S.	---	---	FULL DEPTH REPAIR	---
150 WM	WATERMAIN	150 WM	---	SIDEWALK REPAIR	---
	HYDRANT		---	DIAMOND GRINDING	---
	VALVE			BUS ROUTE	---
	MANHOLE		---	PROPERTY LINE	---
	CATCH BASIN		---	SIDEWALK	---
	CURB INLET			TRAFFIC SIGNAL	---
EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS
SHOWN ARE BASED ON THE BEST INFORMATION
AVAILABLE BUT NO GUARANTEE IS GIVEN
THAT ALL EXISTING UTILITIES ARE SHOWN OR
THAT THE GIVEN LOCATIONS ARE EXACT.
CONFIRMATION OF EXISTENCE AND EXACT
LOCATION OF ALL SERVICES MUST BE
OBTAINED FROM THE INDIVIDUAL UTILITIES
BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. . ELEV. .		COORDINATE SYSTEM: CGD28	
0	ISSUED FOR TENDER	26.04.28	CR
NO.	REVISIONS	DATE	BY



			
DESIGNED BY	AB.	CHECKED BY	SJP
DRAWN BY	AB.	APPROVED BY	CR
HOR. SCALE: 1:250 VERTICAL:		RELEASED FOR CONSTRUCTION:	
DATE	2026/03/23	DATE	2026/04/23



CONSULTANT NO.



THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

PROJECT TITLE

2026 STREETS MAINTENANCE
PRESERVATION PROGRAM
GRANT AVENUE EASTBOUND

ASPHALT MILL AND FILL
STA 1+645 TO STA 1+975

SHEET OF

4 17

CONSULTANT PROJECT NO.

CONSULTANT PROJECT NO.
36-0107-006

20-0107-000

CITY DRAWING NUMBER
2-125