
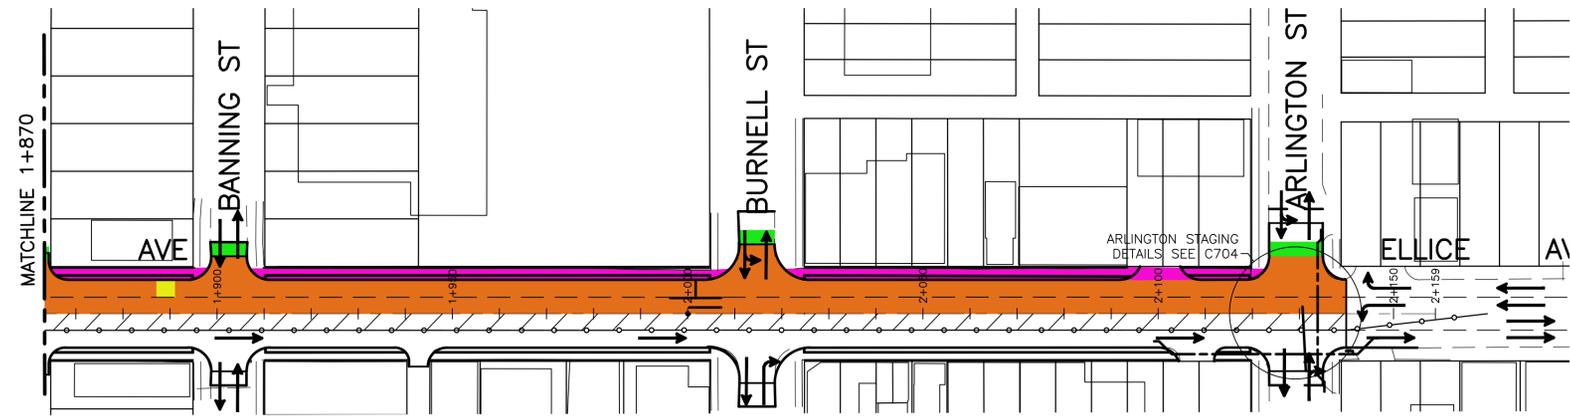


PHASE 2 - SEPTEMBER 14th TO NOVEMBER 1st

SCALE 1:750

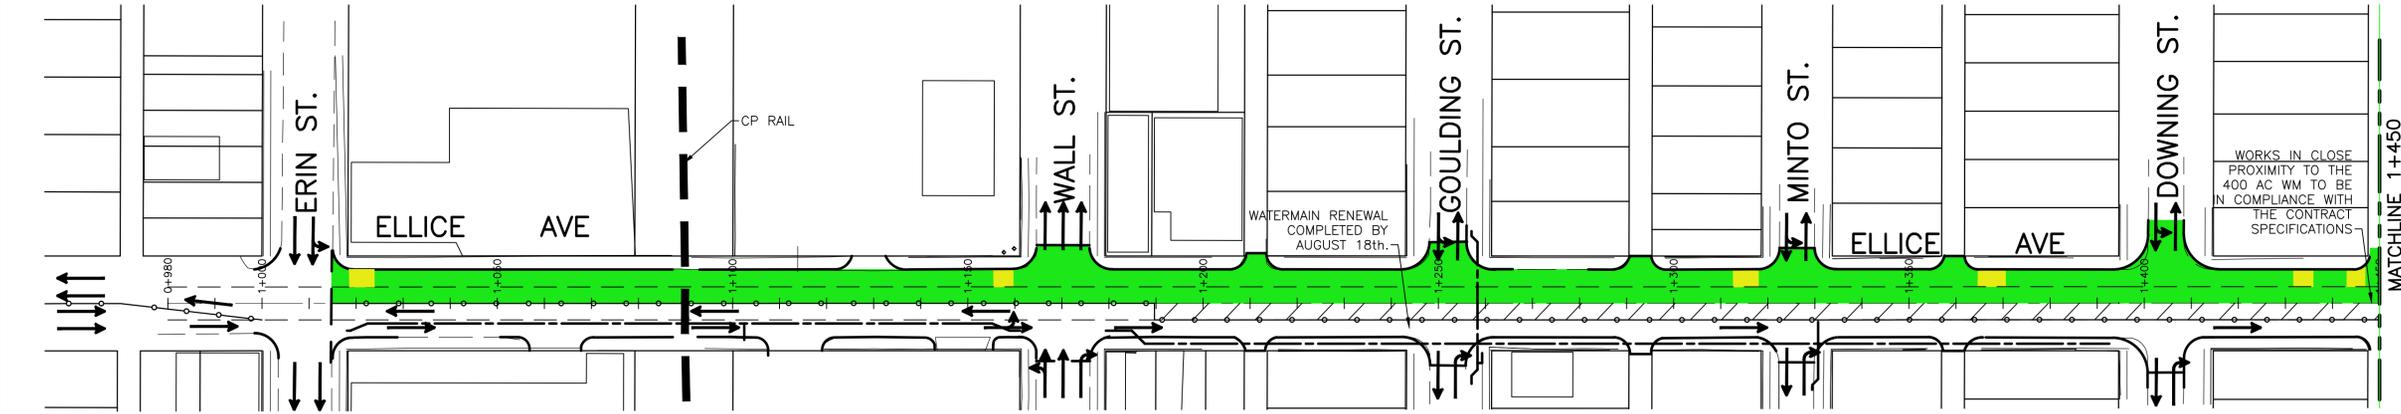

TRAFFIC CONTROL NOTES:

- LANE CLOSURES & RESTRICTIONS**
 - WB LANES CLOSED FOR CONSTRUCTION FROM ERIN ST. TO WALL ST. MAINTAIN ONE EB AND WB LANE ON THE EB LANES.
 - MIDDLE EB LANE AND WB LANES CLOSED FOR CONSTRUCTION FROM WALL ST TO ARLINGTON ST. MAINTAIN ONE EB LANE.
 - LEFT TURNS RESTRICTED ON ELLICE AND UNSIGNALIZED SIDE STREETS FOR DURATION OF PHASE.
 - TRAFFIC PLAN TO BE SUBMITTED AND APPROVED PRIOR TO SET UP OF TRAFFIC CONTROL.
 - ALL TRAFFIC CONTROL PROVIDED BY THE CONTRACTOR IN ACCORDANCE WITH CITY OF WINNIPEG MANUAL OF TEMPORARY TRAFFIC CONTROL.
- PEDESTRIAN TRAFFIC**
 - MAINTAIN SIDEWALKS DURING CONSTRUCTION.
 - MAINTAIN ONE N-S PEDESTRIAN CROSSING AT ALL UNSIGNALIZED INTERSECTIONS.
 - REQUIRED CLOSURES FOR SIDEWALK CONSTRUCTION COORDINATED AND APPROVED BY CONTRACT ADMINISTRATOR.
- TRANSIT**
 - MAINTAIN BUS STOPS FOR DIRECTION OF TRAFFIC.
- PARKING / LOADING**
 - PARKING / LOADING RESTRICTIONS TO BE IN PLACE FOR DURATION OF STAGE
 - RESTRICTION SIGNAGE TO BE PLACED BY TRAFFIC SERVICES.

PHASE 2 MAIN CONSTRUCTION ACTIVITIES:

- STAGE 1 - SEPTEMBER 14th TO OCTOBER 11th:**
- CATCH BASIN SEWER SERVICE & DRAINAGE INLET RENEWALS ON WB LANES - ERIN ST. TO ARLINGTON ST.
- STAGE 2 - SEPTEMBER 19th TO NOVEMBER 1st:**
- CONCRETE PAVEMENT RECONSTRUCTION - WB LANES FROM DOMINION ST. TO ARLINGTON ST.
 - PAVEMENT REHABILITATION CONSTRUCTION - WB LANES FROM ERIN ST. TO DOMINION ST. AND ASPHALT TIE-INS
 - NORTH SIDEWALK RECONSTRUCTION

**ENGINEERS
GEOSCIENTISTS
MANITOBA**
Certificate of Authorization
Stantec Consulting Ltd.
No. 1301

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

WARNING

- IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:
1. NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
 2. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.
 3. OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION.

GENERAL NOTES:

1. TRAFFIC CONTROL PROVIDED AND MAINTAINED BY CONTRACTOR IN ACCORDANCE WITH CITY OF WINNIPEG MANUAL OF TEMPORARY TRAFFIC CONTROL ON CITY STREETS AND TRAFFIC CONTROL SPECIFICATION.
2. CONTRACTOR TO SCHEDULE TRAFFIC CONTROL MEETING WITH CONTRACT ADMINISTRATOR & CITY TRAFFIC SERVICES 48 HOURS IN ADVANCE OF COMMENCING SET UP.
3. WORKS IN CLOSE PROXIMITY TO THE 400 AC WM TO BE IN COMPLIANCE TO THE CONTRACT SPECIFICATIONS.

LEGEND

- POLYPOSTS
- LANE CLOSURE
- CONSTRUCTION ZONE
- PEDESTRIAN CORRIDOR
- OFF PEAK CLOSURE
- TRAFFIC FLOW

LOCATION APPROVED UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE	DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. ELEV.	NO.	REVISIONS	DATE	BY
	2	ISSUED FOR ADDENDUM 1	17.06.20	
	1	ISSUED FOR TENDER	17.06.12	
	0	ISSUED FOR REVIEW	17.05.30	

Stantec
500 - 311 Portage Avenue, Winnipeg MB Canada
www.stantec.com

DESIGNED BY: D.L.	CHECKED BY: D.J.M.
DRAWN BY: G.P.	APPROVED BY: S.B.C.
HOR. SCALE: 1:750	RELEASED FOR CONSTRUCTION: DATE
VERTICAL: DATE 2017.05.18	DATE

ENGINEER'S SEAL
CONSULTANT DRAWING NO. C702

**THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION**

2017 REGIONAL STREET RENEWAL PROGRAM
ELLICE AVENUE
ERIN STREET TO ARLINGTON STREET
TRAFFIC CONTROL / STAGING

SHEET 18 OF 20
CAD FILE DRAWING NUMBER 07271c-701-xxx.dwg
CITY DRAWING NUMBER P-3485-18

V:\1137\active\113707271\0300_drawing\0302_sheet_files\02_civil\07271c-702-xxx.dwg