BOND STREET

YALE AV W

RAVELSTON AVE W

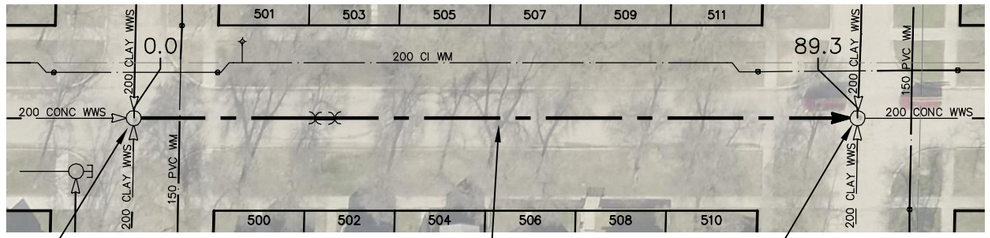

S–MH40012460
RIM 232.91
INV E 229.52
INV S 229.52
INV W 229.52
INV N 229.52

89.3 OF 250 CLAY CS TO BE LINED
S–MA40013763
(FULLY DETERIORATED)

S–MH40012506
RIM 232.90
INV E 229.25
INV S 229.25
INV W 229.25
INV N 229.25

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION

SEWER ID S–MA40013763

DISTANCE FROM MH ID S–MH40012460

DISTANCE	DIAMETER	CLOCK
7.7	150	10
13.6	150	12
14.3	150	12
21.2	150	11
22.6	150	9
32.8	150	12
43.7	150	12
55.6	150	1
56.1	150	11
65.7	150	1
66.3	150	10
76.6	150	10
77.7	150	12

FOR INDEX SEE 11465

0.0 10.0 20.0 30.0 40.0

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE _____ DATE _____

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	AD	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	K. ZURIK
VERTICAL			
DATE	2017 02 16	DATE	2017 02 15

PLOT DATE: 2017 02 16

ENGINEER'S SEAL

ORIGINAL SIGNED BY S.R.J. COURNOYER 17/02/10

CONSULTANT DRAWING NUMBER
–

BID OPPORTUNITY: 71–2017
CONTRACT NUMBER: 4

FILE PATH: R:\DRAWINGS\SEWER\2016 RENEWALS\Contract 4\Construction Dwg\New folder\corrections\
FILE NAME: 11479.dwg

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2016 SEWER MAIN RENEWALS
BY CIPP LINING
BOND STREET
MH AT YALE AVENUE WEST TO
MH AT RAVELSTONE AVENUE WEST

SHEET 14 OF 80

CITY DRAWING NUMBER
11479