BROADWAY

SMITH ST

GARRY ST

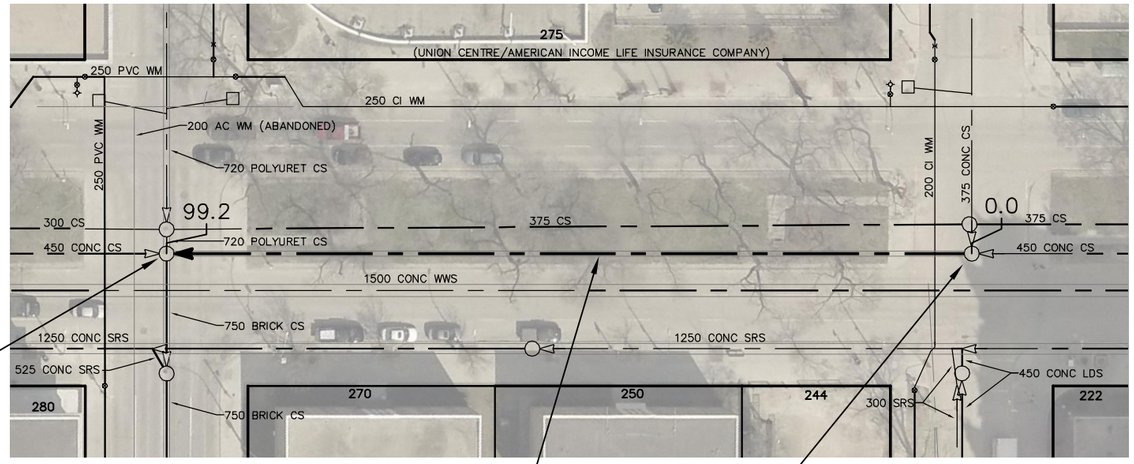

S-MH20012912
RIM 232.17
INV E 227.52
INV S 227.08
INV W 227.51
INV N 226.91

99.2 OF 600 CONC CS TO BE LINED
S-MA20014277
(PARTIALLY DETERIORATED)

S-MH20012950
RIM 232.02
INV E 227.88
INV W 228.16
INV N 227.88

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION		
SEWER ID S-MA20014277		
DISTANCE FROM MH ID S-MH20012950		
DISTANCE	DIAMETER	CLOCK
36.1	150	2

FOR INDEX SEE
11465

0.0 10.0 20.0 30.0 40.0

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE _____ DATE _____

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	AD	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	K. ZURIK
VERTICAL		DATE	2017 02 16
DATE	2017 02 16		

PLOT DATE: 2017 02 16

ENGINEER'S SEAL

ORIGINAL SIGNED BY S.R.J. COURNOYER 17/02/10

CONSULTANT DRAWING NUMBER
–

BID OPPORTUNITY: 71-2017
CONTRACT NUMBER: 4

FILE PATH: R:\DRAWINGS\SEWER\2016 RENEWALS\Contract 4\Construction Dwg\New folder\corrections\
FILE NAME: 11483.dwg

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2016 SEWER MAIN RENEWALS
BY CIPP LINING
BROADWAY
MH AT GARRY STREET (℄) TO
MH AT SMITH STREET (℄)

SHEET 18 OF 80
CITY DRAWING NUMBER
11483