ARLINGTON STREET

WOLSELEY AVE

112.6 OF 375 CS TO BE LINED
S-MA20013899

REPLACE BENCHING
(TO BE DONE BY OTHERS)

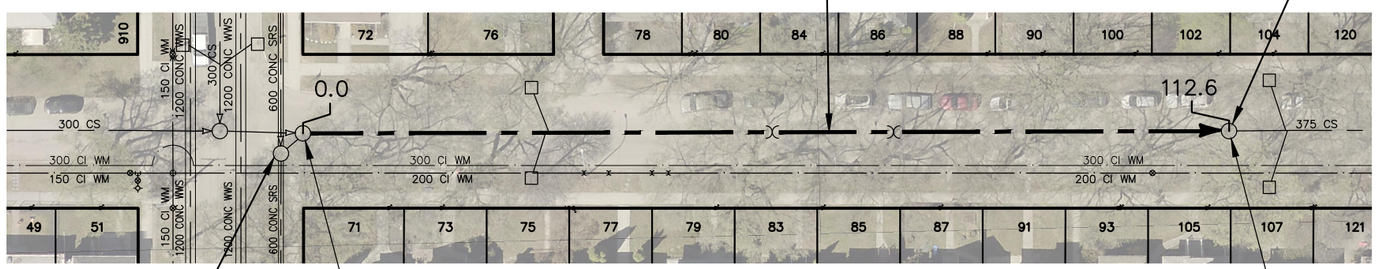

GROUT MH/PIPE INTERFALE
(TO BE DONE BY OTHERS)

S-MH20012594
RIM 230.73
INV N 227.33
INV S 227.33
INV S 227.33

S-MH20012587
RIM 232.44
INV N 227.12
INV S 227.12

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION		
SEWER ID S-MA20013899		
DISTANCE FROM MH ID S-MH20012594		
DISTANCE	DIAMETER	CLOCK
13.4	150	2
16.5	150	10
29.6	150	1
30.5	150	10
33.5	150	2
46.7	150	10
51.0	150	1
64.6	150	10
65.3	150	3
75.3	150	11
79.7	150	2
85.7	150	12
94.4	150	11
102.9	150	11
103.3	150	2
103.7	150	10
111.7	150	11
112.1	150	1

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

FOR INDEX SEE
12201

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	AJ	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	S. COURNOYER
VERTICAL			
DATE	2019 07 12	DATE	2019 07 12

PLOT DATE: 2019 07 12

ENGINEER'S SEAL
ORIGINAL SIGNED BY S.R.J. COURNOYER 19/07/12

CONSULTANT DRAWING NUMBER
–

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2018 SEWER MAIN RENEWALS
BY CIPP LINING

ARLINGTON STREET

1ST MH N OF WOLSELEY AVENUE (N-℄) TO
1ST MH S OF WESTMINSTER AVENUE

SHEET 9 OF 57

CITY DRAWING NUMBER
12208

BID OPPORTUNITY: 619-2019
CONTRACT NUMBER: 5

FILE PATH: R:\DRAWINGS\SEWER\2018 RENEWALS\RENEWALS & ASSOCIATED WORKS\CONTRACT 5\CONSTRUCTION DWGS\
FILE NAME: ARLINGTON ST 1ST MH N OF WOLSELEY AVE.dwg