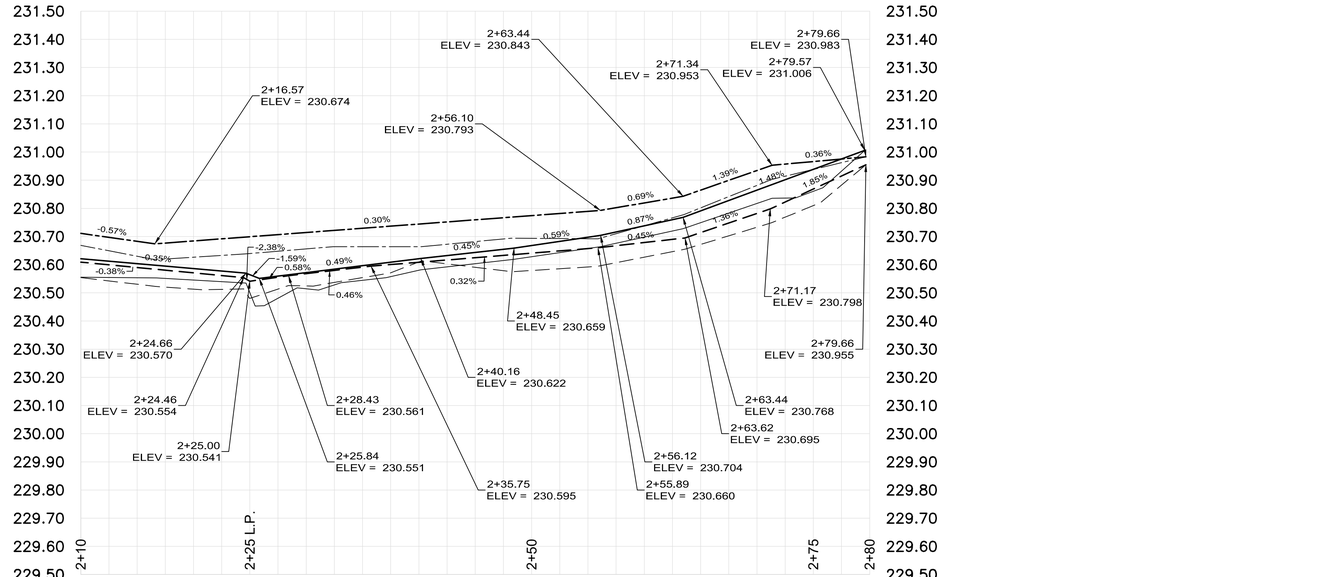

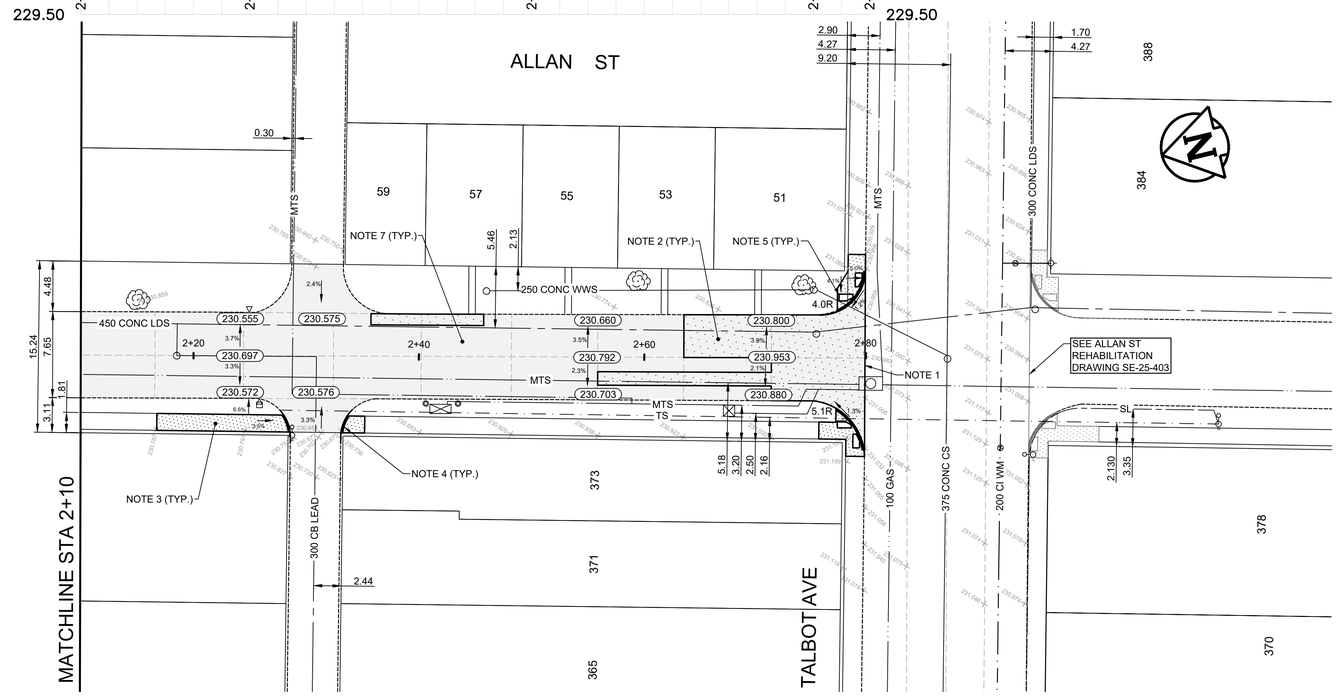

CONSTRUCTION NOTES

1. LIMIT OF TBO
2. REMOVE EXISTING PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT
3. RENEW EXISTING 100mm CONCRETE SIDEWALK (SD-228A)
4. CONSTRUCT NEW CURB RAMP (SD-229E)
5. INSTALL NEW DETECTABLE WARNING SURFACE TILE (SD-229E)
6. INSTALL TYPE B PAVEMENT REPAIR FABRIC
7. CONSTRUCT NEW TYPE MS1 ASPHALT OVERLAY
8. REMOVE EXISTING ASPHALT

GENERAL NOTES

A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
B. ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED
C. ADD 200.000m TO ALL DESIGN ELEVATION TO OBTAIN GEODETIC ELEVATIONS
D. CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR

ISSUED FOR TENDER
NOT TO BE USED FOR CONSTRUCTION

METRIC
WHOLE NUMBERS INDICATE MILLIMETERS
DECIMALIZED NUMBERS INDICATE METERS

TENDER NO. 11-2025

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
☼	HYDRANT	✦		LDS/WWS			CONCRETE	
⊗	VALVE	⊗		WATERMAIN			CONCRETE SIDEWALK	
♀	CURB STOP	♀		GAS			ASPHALT	
○	MANHOLE	●		TRAFFIC SIGNALS			PAVEMENT REPAIR FABRIC	
□	CATCH BASIN	■		HYDRO/STREET LIGHT				
△	CATCH PIT/CURB INLET	▲		MTS/SHAW				
○-○	HYDRO POLE	●-●		CURB RENEWAL				
○-○	LIGHT STANDARD	●-●		PROPERTY LINE				
○→	TRAFFIC SIGNAL POLE	●→		RAMP CURB			WEST GUTTER	
⊕	SURVEY BAR	✦	231.000	ELEVATIONS	231.000		CENTER LINE	
▲	GEODETIC BENCH MARK			TREE			EAST GUTTER	

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPR. U/G STRUCTURES COMMITTEE _____ DATE _____

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. IB @ N.W. CORNER OF RIVERTON AVE AND ALLAN ST
ELEV. 230.759

NO.	REVISIONS	DATE	BY
2.	ISSUED FOR TENDER	25/03/07	V.S.
1.	SUBMIT FOR PLAN APPROVAL	25/02/12	C.W.

ENGINEERING DIVISION
TECHNOLOGY SERVICES BRANCH
106 - 1155 PACIFIC AVE

DESIGNED BY	V.S.	CHECKED BY	G.K., R.W.
DRAWN BY	V.S.	APPROVED BY	J.T.S.
HOR. SCALE:	1 : 250		
VERTICAL:	1 : 10		
DATE	2025/02/26		

PROVINCE OF MANITOBA
J.T. SHUMKA
Member 32541
REGISTERED PROFESSIONAL ENGINEER
2025-03-05

Winnipeg

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

ALLAN STREET
FROM TWEED AVENUE TO TALBOT AVENUE
THIN BITUMINOUS OVERLAY AND ASSOCIATED WORKS
FROM STA. 2+10 TO STA. 2+80

CITY DRAWING NUMBER SE-25-402
SHEET 3 OF 23

2