WOODYDELL AVENUE

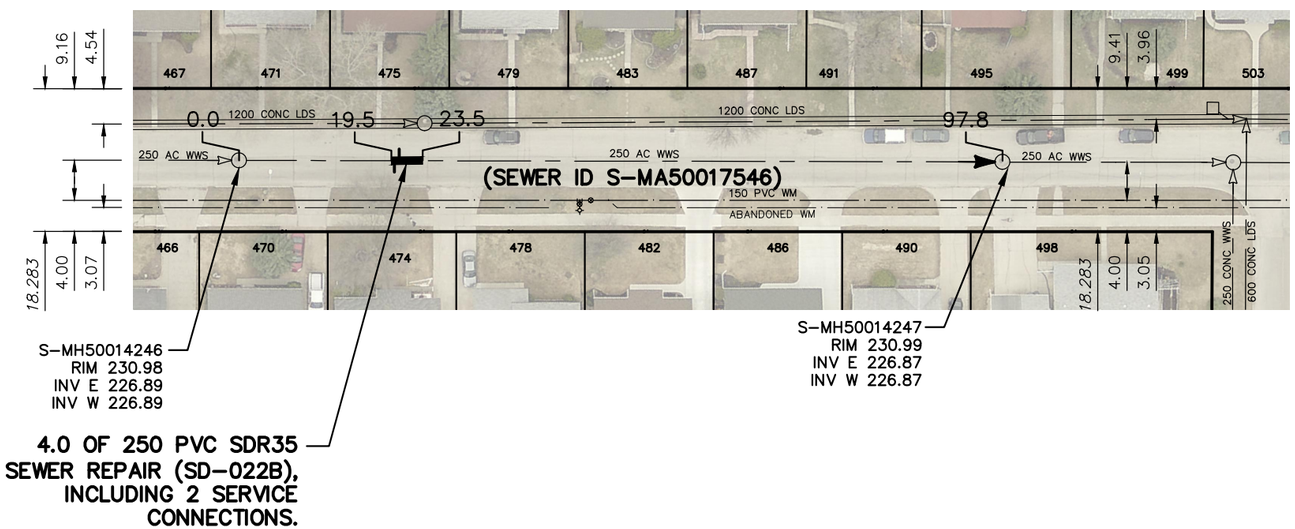

BRAMTON ST

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION SEWER ID S-MA50014546		
DISTANCE FROM MH ID S-MH50014246		
DISTANCE	DIAMETER	CLOCK
2.7	150	1
3.3	150	11
19.9	150	1
20.5	150	10
31.7	150	1
32.7	150	11
47.3	150	10
49.5	150	1
50.5	150	11
63.3	150	1
64.2	150	11
66.7	150	11
78.9	150	10
80.9	150	1
81.9	150	11
94.8	150	1
95.8	150	11

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

FOR INDEX SEE 12039

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	MJK	CHECKED BY	SC
DRAWN BY	BL	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	K.ZUREK
VERTICAL			
DATE	2019 01 25	DATE	2019-01-25

PLOT DATE: 2019 01 25

ENGINEER'S SEAL
ORIGINAL SIGNED BY S.R.J. COURNOYER 19/01/24

CONSULTANT DRAWING NUMBER
–

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2018 SEWER MAIN RENEWALS
BY EXTERNAL POINT REPAIR
WOODYDELL AVENUE
3RD MH W OF BRAMTON STREET TO
2ND MH W OF BRAMTON STREET

SHEET 24 OF 24
CITY DRAWING NUMBER
12068

BID OPPORTUNITY: 40-2019
CONTRACT NUMBER: 9

FILE PATH: R:\DRAWINGS\SEWER\2018 RENEWALS\RENEWALS & ASSOCIATED WORKS\CONTRACT 9\Construction Dwg\
FILE NAME: WOODYDELL AV.dwg